

Laboratory Ball Valve Type 522



Type 522
PVC-U

Type 522
PVDF

Product description

The laboratory ball valve type 522 is the ideal valve for use in laboratory applications. It is available in diameter DN6 in the materials PVC-U and PVDF, as well as with BSP or NPT thread. The various connection options and other accessories are supplied as standard.

Function

The ball valve uses a rotating ball with a hole through it that allows straight-through flow in the open position and shuts off flow when the ball is rotated 90° to block the flow passage. This valve is mainly used for open/close functions and for regulating services.

Applications

- Laboratory applications
- Dosing
- Sample taking


Benefits/features

- ideal for laboratory applications
- Lock and metering ring for protection of sampling ball valve from any unwarranted opening
- Lock and metering ring for adjustment of ball opening angles
- Sampling ball valve can be 100% opened at any time by removing the lock and metering ring
- Compact design
- Low weight
- Corrosion resistant
- PVDF Sampling ball valve is Oil & Silicone-free

Flow media

Neutral and aggressive media with a small amount of particles/solids. The chemical resistance is independent of the selected valve material ([see online tool ChemRes PLUS](#)).


Technical data

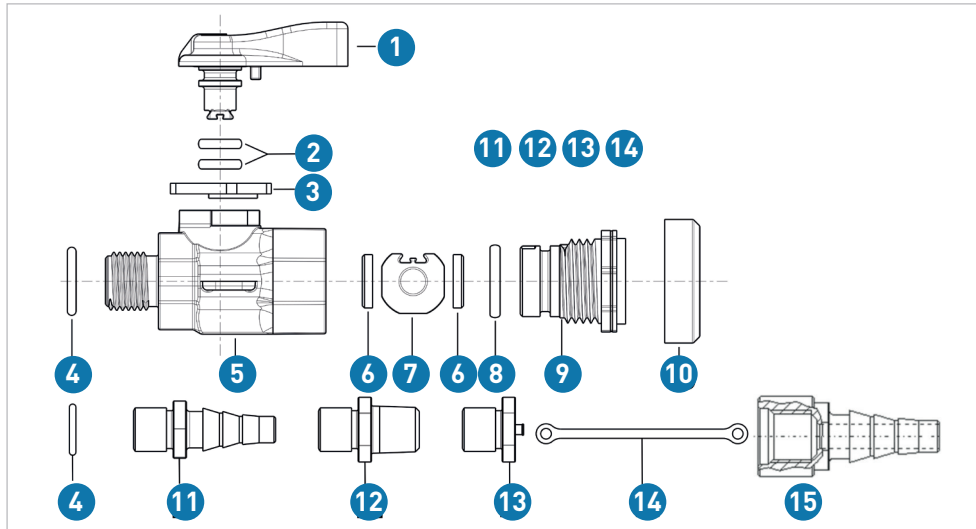

- ① Handle
- ② O rings
- ③ Blocking and dosage ring
- ④ O rings
- ⑤ Housing
- ⑥ Ball seat ring
- ⑦ Ball
- ⑧ O rings
- ⑨ Pressure ring
- ⑩ Safety clip
- ⑪ Hose connector AG
- ⑫ Double nipple
- ⑬ Blanking plug
- ⑭ Fastening clip
- ⑮ Hose connector IG

Specifications		
Dimensions	d10/DN6	
Materials	Valve body and lever	PVC-U, PVDF
Gasket materials	O rings	EPDM, FPM
	Ball seating joint	PTFE
Pressure level	PN10	
Connections PVC-U	Body	BSP, NPT
	Hose nozzle	BSP, NPT
	Double nipple	BSP - NPT, NPT - NPT
	Plug	BSP
Connections PVDF	Gehäuse	BSP, NPT
	Hose nozzle - male thread	BSP
	Double nipple	BSP, NPT
	Plug	BSP
Approvals	PVC-U	NSF, FDA, WRAS, ACS, KTW, KIWA
	PVDF	NSF, FDA

Flow characteristics

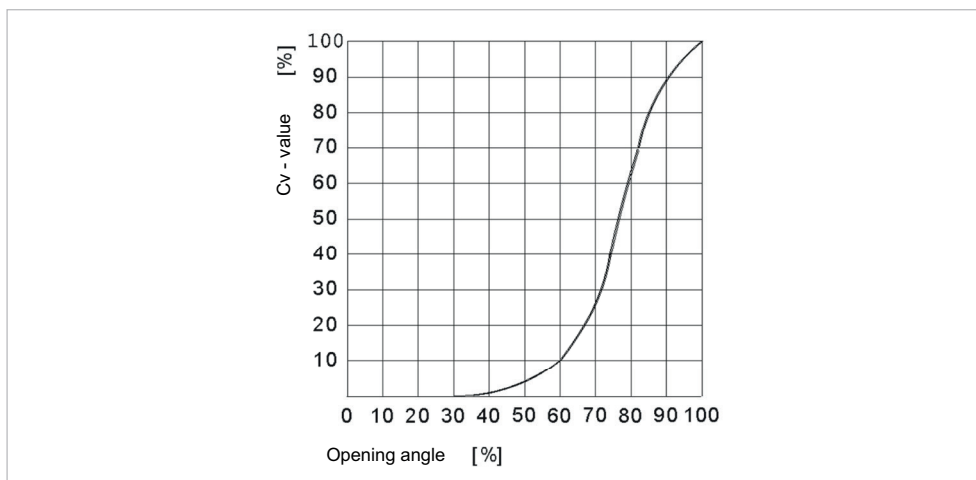


- X Opening angle (%)
- Y kv, Cv value (%)

Pressure-temperature diagrams


The following pressure-temperature diagrams are based on a service life of 25 years and water or similar media.

T Temperature (°C, °F)
P Permissible pressure (bar, psi)

PVC-U, PVDF

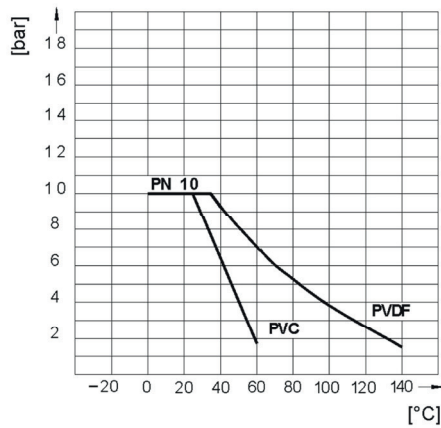

Dimensions

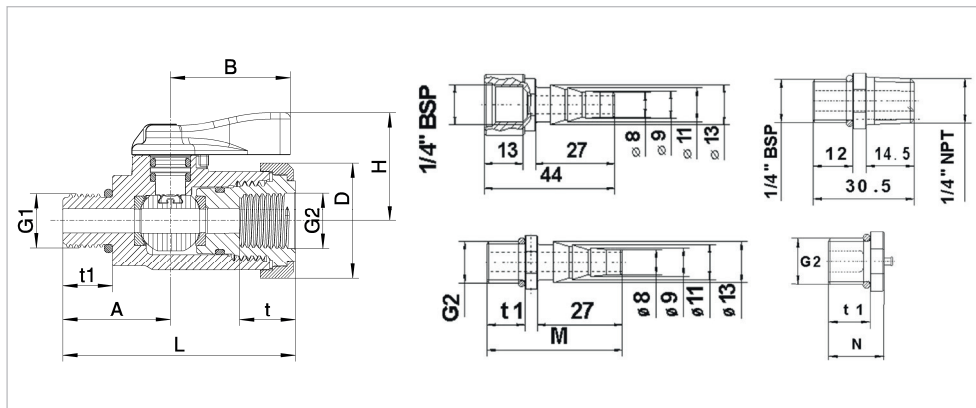

	G1	G2	A	B	D	H	L	M	N	t	t1	PN
PVC-U	1/4" BSP	1/4" BSP	26	29	28	26.5	56	43	16	13.5	12	10
	3/8" BSP	1/4" BSP	26	29	28	26.5	56	43	16	13.5	12	10
	1/4" NPT	1/4" NPT	28.5	29	28	26.5	58.5	45.5	18.5	13.5	14.5	10
PVDF	1/4" BSP	1/4" BSP	26	28.2	28	26	56	43	16	13.2	12	10
	1/4" NPT	1/4" NPT	28.5	28.2	28	26	58.5	45.5	18.5	13.2	14.5	10

i For further information on accessories, refer to the online product catalogue at www.gfps.com

■ Mobile apps and online tools to support configuration and calculation at www.gfps.com/tools



The information and technical data (altogether "Data") herein are not binding, unless explicitly confirmed in writing. The Data neither constitutes any expressed, implied or warranted characteristics, nor guaranteed properties or a guaranteed durability. All Data is subject to modification. The General Terms and Conditions of Sale of Georg Fischer Piping Systems apply.

10/2021-A
© Georg Fischer Piping Systems Ltd, 8201 Schaffhausen/Switzerland
Tel. +41 52 631 11 11 • www.gfps.com • E-Mail: info.ps@georgfischer.com