


DATA SHEET

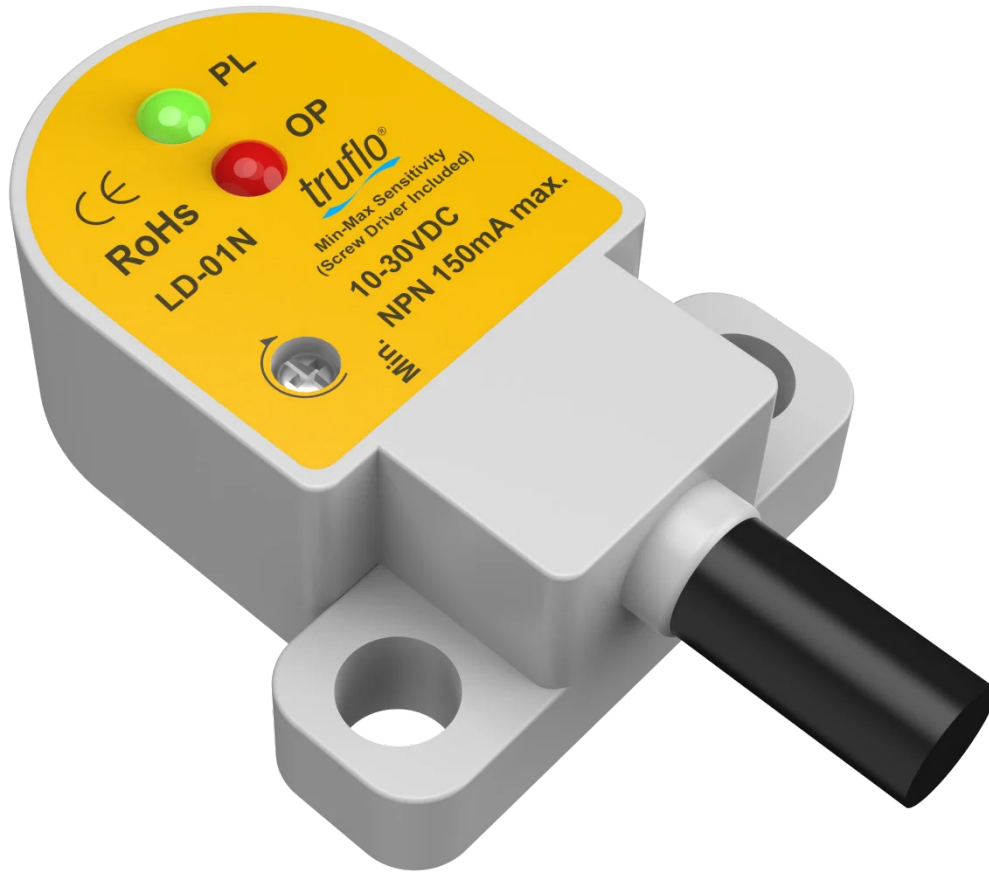


Please call:
BURT PROCESS EQUIPMENT
800-577-8111 for SALES and SUPPORT.
[Click here to return to website](#)

Truflo® — LD Series

Plastic Leak Detection Sensor



- ✓ Low Profile Floor Design
- ✓ Capacitive Fail-Safe Operation
- ✓ Perfect for Aggressive and Electrically
- ✓ Conductive Corrosive Chemicals

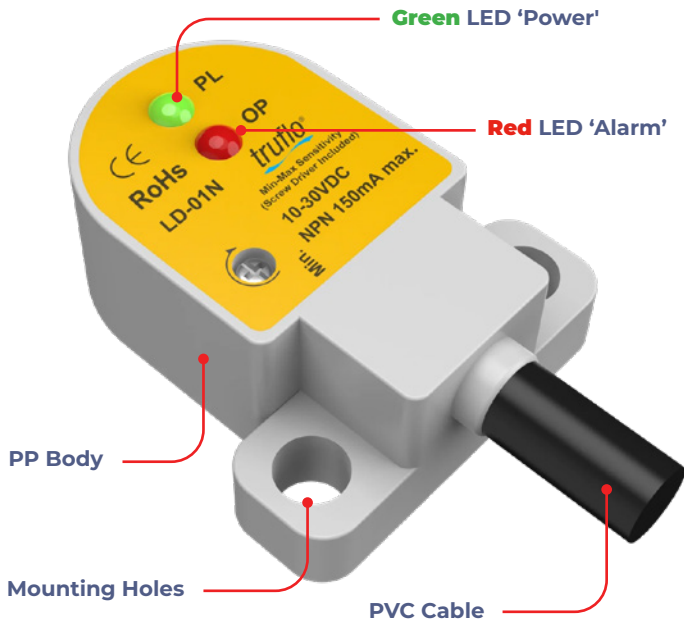

Features

- ✓ PP Body – PVC Cable
- ✓ NEMA 4X
- ✓ Adjustable Sensitivity Setting
- ✓ Corrosion Resistant
- ✓ LED Power and Upset Indication
- ✓ NPN | PNP Pulse Relay Output


Applications

- ✓ Chemicals | Acids | Bases
- ✓ Tank | Sump Leaks
- ✓ Industrial Process Piping Leaks
- ✓ Dosing Pump Skids-Pump | Fitting Leaks
- ✓ Double Walled Tanks


Technical Specifications

General	
Power Consumption	Approx. 3W
Ambient Temperature	-20 - 60°C -20 - 140°F
Outputs	Switch : NPN PNP maximum 150mA
Model	
LD-01N	Compact Leak Detector with 2m of Cable


Working Principle

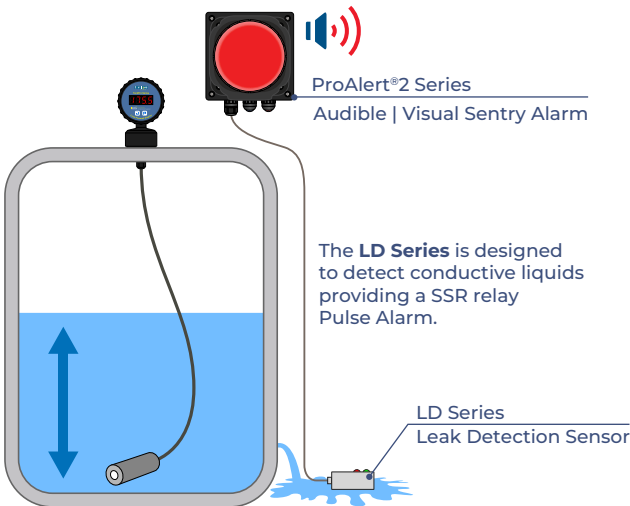

Wiring Diagram

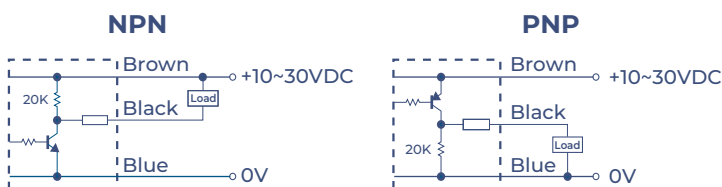

Dimensions

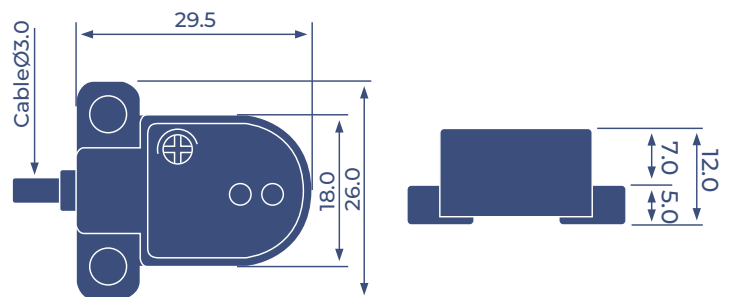

US quarter
for size
comparison

