


# RFP Series

## RotoFlo® Flow Meter

- ✓ Quick Visual Flow Indication
- ✓ Dual Scale
- ✓ Easy Installation
- ✓ NPT Connections
- ✓ SS Flow Components
- ✓ ½" - 2" Size Range

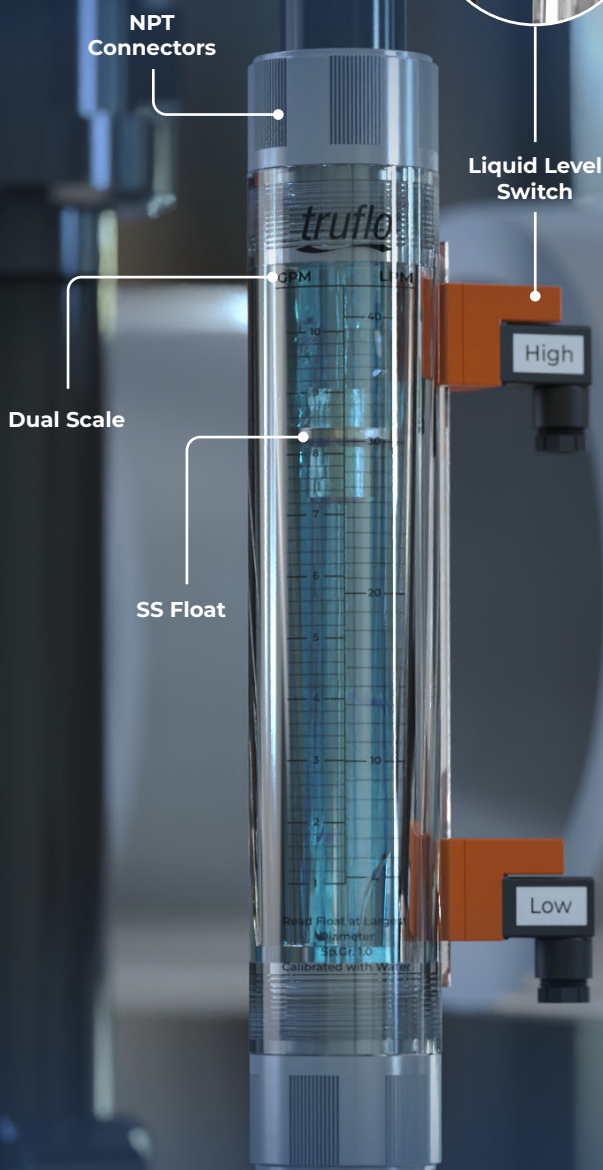

The **RFP Rotoflo®** Series flow meter provides exceptional accuracy and long term local indication of measured liquid media.

The Rotoflo® comprises a SS guide rod and a dual scale for clear visibility. The large tapered float provides stability and consistent flow indication throughout the entire range.

### Technical Specifications


Plastic Wetted Material	Acrylic   FPM   PVC
Metal Wetted Material	SS
Accuracy	±4 F.S.
Scale	GPM   LPM
Connection	NPT
Standards & Approvals	CE   RoHS Compliant

### Technical Parameters

Model	Measure Range		End Connector	Accuracy	Size (mm)			
	GPM	LPM			A	B	C	D
RFP-15011	0.1 ~ 1	0.4 ~ 4	½" MNPT   FNPT*	±4%	235	233	180	Ø32
RFP-15022	0.2 ~ 2	1 ~ 7						
RFP-15033	0.3 ~ 3	1 ~ 11						
RFP-15055	0.5 ~ 5	1.8 ~ 18						
RFP-20110	1 ~ 10	4 ~ 40	1 ¼" NPT	±4%	330	283	236	Ø45
RFP-20220	2 ~ 20	10 ~ 70						
RFP-20535	5 ~ 35	20 ~ 140						
RFP-25110	1 ~ 10	4 ~ 40	1 ½" NPT	±4%	319	297	235	Ø51
RFP-25220	2 ~ 20	10 ~ 70						
RFP-25330	3 ~ 30	10 ~ 110						
RFP-25535	5 ~ 35	20 ~ 140						
RFP-2550	5 ~ 50	25 ~ 190						
RFP-40440	4 ~ 40	15 ~ 150	1 ½" FNPT	±4%	340	302	240	Ø65
RFP-40660	6 ~ 60	22 ~ 220						
RFP-4015100	15 ~ 100	50 ~ 400						
RFP-5020100	20 ~ 100	100 ~ 350	2" NPT	±4%	400	367	294	Ø75
RFP-5040100	40 ~ 150	150 ~ 550						
RFP-5060200	60 ~ 200	150 ~ 750						

\*FNPT = Standard

#### Female Thread Structure Chart



#### Male Thread Structure Chart

**Precision and Clarity**  
For Reliable, Long-Term  
Liquid Monitoring

