




Tuberías y conexiones de PVC

PVC

TUBERÍAS Y CONEXIONES PARA AGUA FRÍA CON ROSCA SEGÚN
NTP 399.166 : 2008 / NTP 399.019 : 2004 / NTE 002

ADAPTADORES UNIÓN PRESIÓN-ROSCA

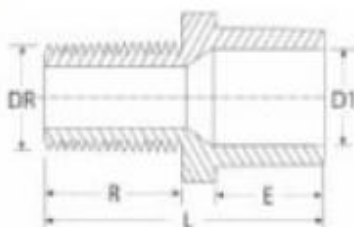

Diámetro Nominal (Pulg)	D1 (mm)	L (mm)	E (mm)	R (mm)	PESO APROX. (Kg)	F
1/2"	21.2	46	23	17	0.017	I
3/4"	26.7	50	27	17	0.023	I
1"	33.2	57	29	21	0.040	I
1 1/4"	42.4	66	36	22	0.050	T
1 1/2"	48.4	72	41	22	0.075	T
2"	60.5	89	51	23	0.130	T
2 1/2"	73.6	107	62	35	0.145	T
3"	89.1	126	75	36	0.250	T
4"	114.9	157	97		0.500	T
6"	169.0	300	143		1.600	T
8"	220.3	391	186		3.600	T
10"	274.6	487	232		5.900	T
12"	324.6	577	275		7.000	T

R= Longitud Mínima de Rosca caD1 = Diámetro entrada de Campana