


MEASURES EXPRESSED IN INCHES



Bushing Tolerance

$\varnothing 2.126 + 0.008 / + 0.012$

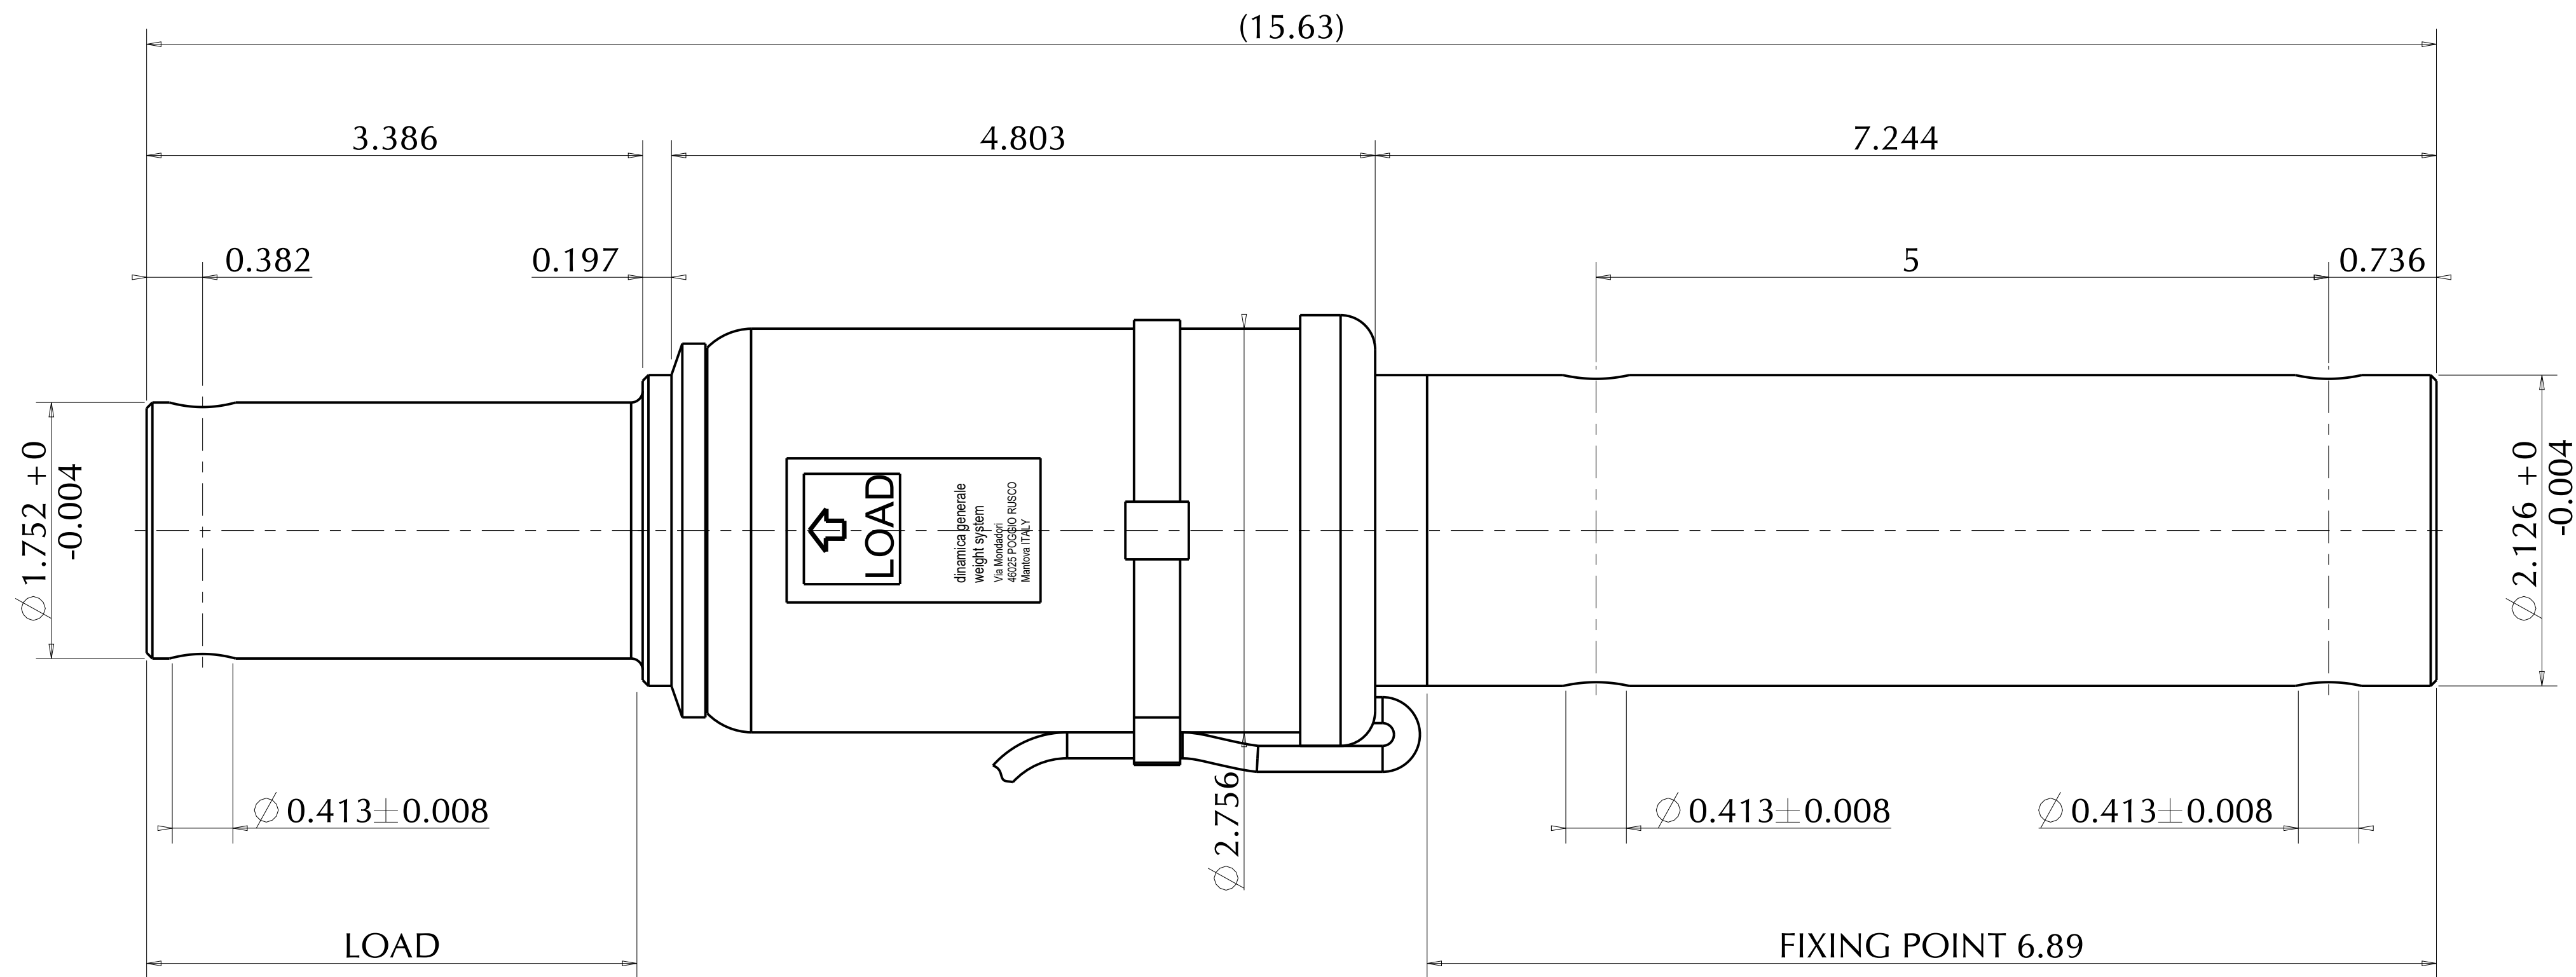


ALL RIGHTS OF THE PROJECT STRICTLY RESERVED TO DINAMICA GENERALE. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS, NOT PERMITTED WITHOUT WRITTEN AUTHORIZATION FROM DINAMICA GENERALE

This documents is for reference, dimensions are subject to change.

INPUT +	RED
INPUT -	BLACK
OUTPUT +	GREEN
OUTPUT -	WHITE

SPECIFICATIONS	STATIC	MOBILE
RATED LOAD (LBS)	15000	10000
RATED LOAD (Kg)	6804	4536
RATED OUTPUT (mV/V)	0.75	0.50

PART CODE	CABLE LENGHT		CABLE TERMINATION
	FT	m	
969-0492	21.3	6.5	Wires

D	-	-	-	-		A2		
C	-	-	-	-				
B	-	-	-	-				
A	A0	29/01/21	M.B.	Emissione disegno	SCALE		6/5	
REV.	MOD.N.	DATE	SIGNATURE	DESCRIPTION	UNSPECIFIED TOLLERANCES			
				*DRAWN	*CHECKED		*APPROVED	
			DATE	29/01/2021	29/01/2021		29/01/2021	
			SIGNATURE	M.Bresciani	L.Pardo		R.Passardi	ROUGHNESS
			WEIGHT [lbs]	14.582			*REFER TO ORIGINAL DRAWING IF SIGNATURE ARE PRINTED	
DESCRIPTION								
MOBILE Load Cell DG18144/54-BK C=6.5m + Wires								
CODE			969-0492		REV.	A0	THE COPY OF THIS DRAWING MUST BE APPROVED BY DINAMICA GENERALE	
46025 Poggio Rusco (MN) Via Mondadori,15 Tel. + + 39 0386.52134 Fax + + 39 0386.51523								