

 weightechUSA

WT3000-P

DIGITAL WEIGHT INDICATOR



Waterproof weight indicator up to 10.000 divisions

WT3000-P_datasheet_v01_r3 - 12/12/2024

Technical review: Loui Oriqui | Comercial review: Loui Oriqui

Editor: Stéphanie



WT3000-P

DIGITAL WEIGHT INDICATOR

Featuring advanced technology, including a high-resolution display and versatile connectivity options, such as RS232, it facilitates seamless integration with existing systems. The WT3000-P stands out as a reliable and efficient weight indicator, meeting the demands of diverse industrial weighing needs with precision and durability.



Easy-to-view display

Button keyboard

Spanish pounds for weighing coffee

NTEP Certified





6V battery included

Bluetooth (optional)

ABS IP68 washdown enclosure



DIMENSIONS

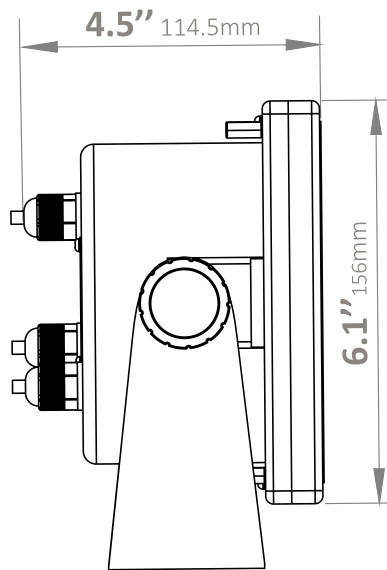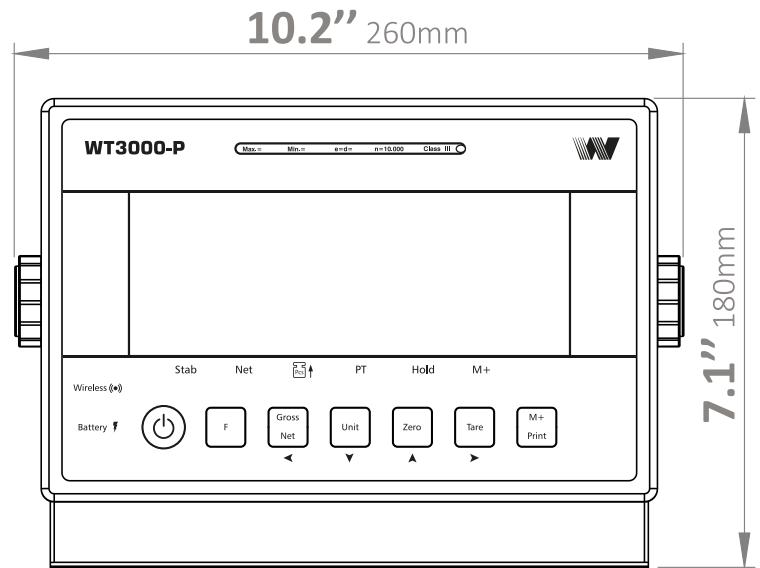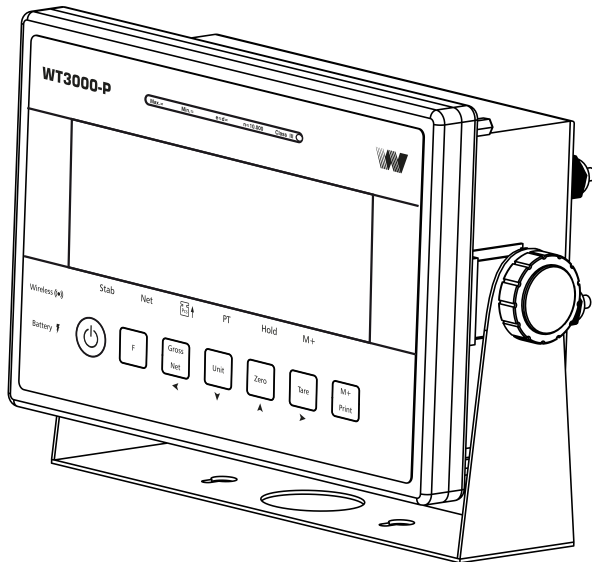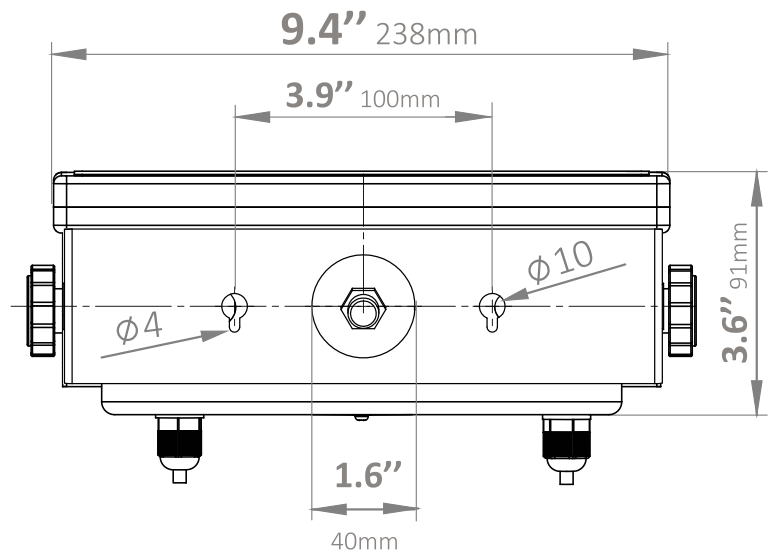

TECHNICAL DATA

Sensitivity	$\mu\text{V/d}$	0,3
Measuring scale	mV/V	-1 ... +14
Zero balance		-1 ... +5
Measuring units		kg, g, lb, oz
Internal resolution		1 / 500,000
Non-linearity		0,01% F.S.
Maximum number of load cells	Ω	8 x 350
Excitation voltage of load cells	VDC	5
Wire connection of load cells		6 wires
Input power supply	VAC	AC 110 or 220V 50/60HZ - Internal rechargeable battery 6V/4,5Ah
Maximum consumption	mA	150
Operating temperature range	$^{\circ}\text{C}$	0 ... +40
Display		LCD, 6 digits, with backlight
Display height	mm	55
Display captions		Zero Net Low Battery Stable Gross Bluetooth enable Low Hi OK.
Comunication interfaces		RS232 serial output
Protection degree		IP-68

FEATURES

- NTEP certified for 10,000 divisions
- 6.89" x 2.76" Backlit LCD display with 2.15"- 55mm digit height
- Up to 8 load cells (350 Ω) or 16 load cells (700 Ω)
- One built-in full-duplex RS232
- 6V battery included
- Prints Date, Time, Gross Weight and Net Weight on Epson TMU295 or Zebra CG420t/TLP2844
- Waterproof Weight Indicator
- Two years limited warranty

PART NUMBER

Product	Codes
WT3000-P	20080

FIND US

10384 W State road 84 #6 - Davie, FL 33324
sales@weightechusa.com
weightechusa.com

Technical Support: +1 (954) 666-0877x302

Sales: +1 (954) 666-0877x305

MORE INFO



PRODUCT PAGE