weightechUSA

WT3000-iR

DIGITAL WEIGHT INDICATOR

Designed for severe applications quality and performance

WT3000-P_datasheet_v01_r1 - 29/02/2024
Technical review: Loui Oriqui | **Comercial review:** Eber Santos
Editor: Leonardo Guerreiro

IP68

weightechUSA

WT3000-iR

DIGITAL WEIGHT INDICATOR

The Weight Indicator WT3000-iR is a suitable equipment with a variety of applications, it can be used for truck scales, livestock scales, cattle, concrete batch plants, also it has a built-in serial port RS-232, and a Bluetooth 4.0 interface for wireless applications.

FEATURES

- NTEP certified for 10,000 divisions
- 6.89" x 2.76" Backlit LCD display with 2.15"- 55mm digit height
- Up to 8 load cells (350Ω) or 16 load cells (700Ω)
- One built-in full-duplex RS232
- 6V rechargeable battery included
- Prints Date, Time, Gross Weight and Net Weight on Epson TMU295 or Zebra CG420t/TLP2844
- Waterproof Weight Indicator
- Two years limited warranty
- Bluetooth (opcional)

APPLICATIONS

- Platform Scales
- Livestock weighing
- Cattle Chute
- Truck Scales
- Concrete Batch Plants
- Peak Hold Funciton

DIMENSIONS

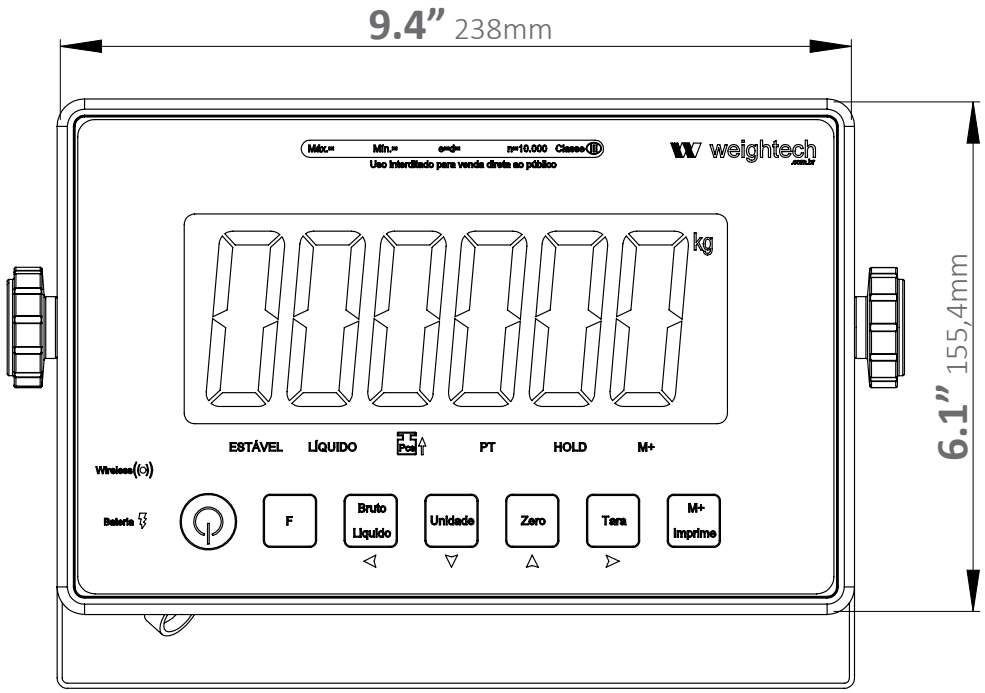
9.4” 238mm
6.1” 155,4mm
Máx.= Min.= e=d= n=10.000 Classe III
Uso Interditado para venda direta ao público
weightech
kg
ESTÁVEL LÍQUIDO PT HOLD M+
Wireless
Bateria
F
Bruto Líquido
Unidade
Zero
Tara
M+ Imprime

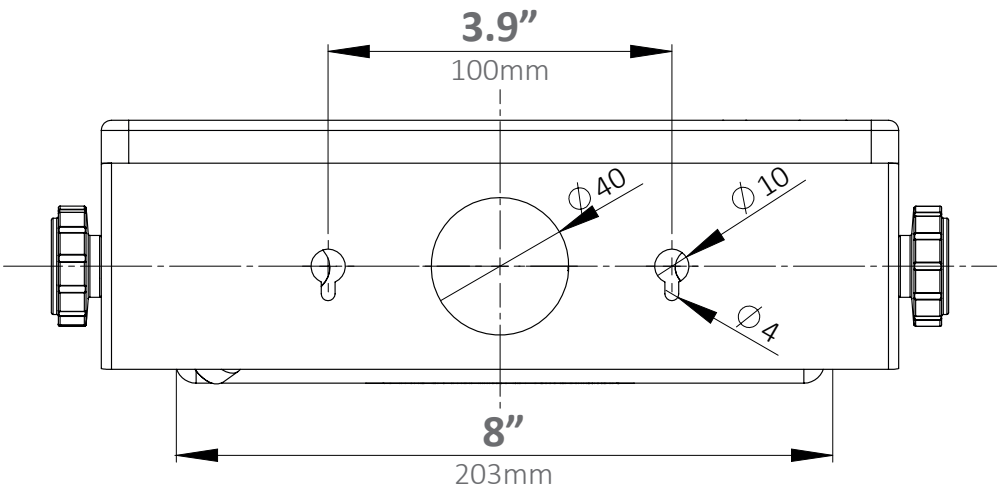
3.9”
100mm
ϕ40
ϕ10
ϕ4
8”
203mm

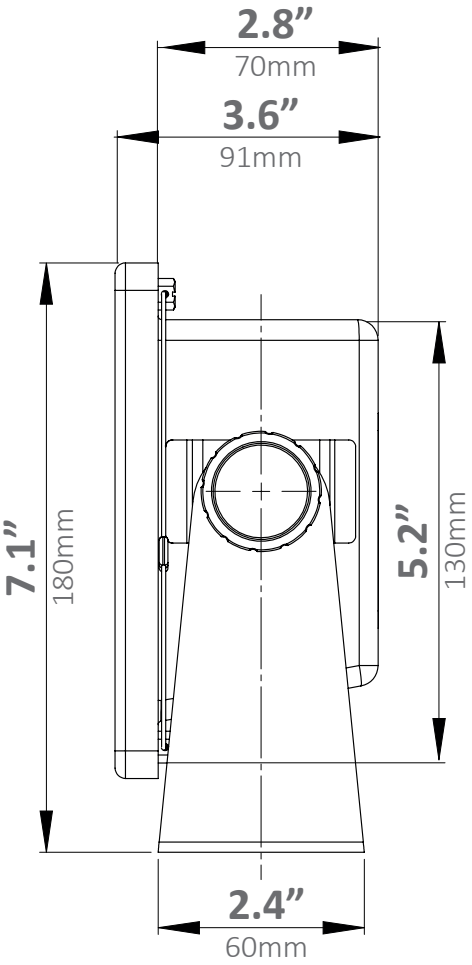
2.8”
70mm
3.6”
91mm
7.1”
180mm
5.2”
130mm
2.4”
60mm

TECHNICAL DATA

Sensitivity	μV/d	0,3
Measuring scale	mV/V	-1 ... +14
Zero balance		-1 ... +5
Measuring units		kg, g, lb, oz
Internal resolution		1 / 500,000
Non-linearity	% F.S.	0,01
Maximum number of load cells	Ω	8 x 350
Excitation voltage of load cells	VDC	5
Wire connection of load cells		6 wires
Input power supply	VAC	AC 110 or 220V 50/60HZ - Internal rechargeble battery 6V/4,5Ah
Maximum consumption	mA	150
Operating temperature range	°C	0 ... +40
Display		LCD, 6 digits, with backlight
Display height	mm	55
Display captions		Zero | Net | Low Battery | Stable | Gross | Bluetooth enable | Low | Hi | OK.
Comunication interfaces		RS232 serial output
Protection degree		IP-68 | NEMA4 X

PART NUMBER

Product	Codes
WT3000-iR	20000

FIND US

10384 W State road 84 #6 - Davie, FL 33324
sales@weightechusa.com
weightechusa.com
Technical Support: +1 (954) 666-0877x302
Sales: +1 (954) 666-0877x305

MORE INFO

PRODUCT PAGE