

# WT3000-IR-AG Weighing Indicator

## Portable. Connected. Farm-Ready.



## WT3000-IR-AG Weighing Indicator

Weigh your animals faster, record every result automatically, and move on — no PC, no cables, no hassle. Everything you need fits in one rugged case

# WT3000-IR-AG Weighing Indicator

**Portable. Connected. Farm-Ready.**

Meet the ultimate on-farm weighing solution: two ultra-slim, carbon-steel-coated bars plus the WT3000-IR-AG indicator - pre-mounted in an IP65-rated carrying case. From chute-side tagging to pasture checks, you'll capture every weight and ID without hauling a PC out to the field.



## PRACTICALITY/MOBILITY

Goes where your cattle go.  
Powers from any vehicle outlet or wall socket — no generator needed.

## EASY TO OPERATE

Large backlit display changes color to confirm each weigh-in.  
Anyone on the farm can operate it from the first day

## CONNECTIVITY

Send every weight directly to your phone. No manual entry, no lost records

## FLEXIBILITY

Connects to your existing bars if you already have Tru-Test, Gallagher, or similar, no need to replace what's working.  
The Weigh Bar Pro is designed to work with standard cattle chute and alley configurations.  
Compatible with floor-mount setups from leading brands including Arrowquip, Powder River, WW Manufacturing, Gallagher, and Tru-Test. Verify floor channel dimensions against your specific chute model before installation.

## INTEGRATION WITH APPS

Pair it with the WeightechUSA app and every weigh-in writes itself - weight, date, time, GPS location, and animal ID, all logged automatically.

Track growth rates, manage your herd, and pull reports without touching a spreadsheet

## AND MORE...

- Fully compatible with the Weightech line of remote displays, for clear reading even at long distances.
- Pressure equalization valve (GORE) that prevents moisture inside the equipment.

### OPTIONALS:

- Portable Electronic Terminal (model AP-02) with Android System, to install the app, for controlling herd management operations and printing tickets.
- PT280: RFID tag reader integrated with WeightechUSA app.



Tablet with App



AP-02




PT280



## OUTLINE DIMENSIONS (in millimeters)

### WT3000-IR-AG Weighing Indicator

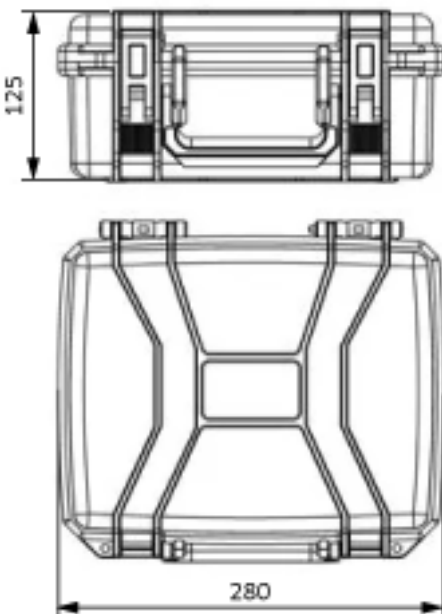


Internal measures:  
248 x 190 x 106



## OUTLINE DIMENSIONS (in millimeters)

### Weighing Bar

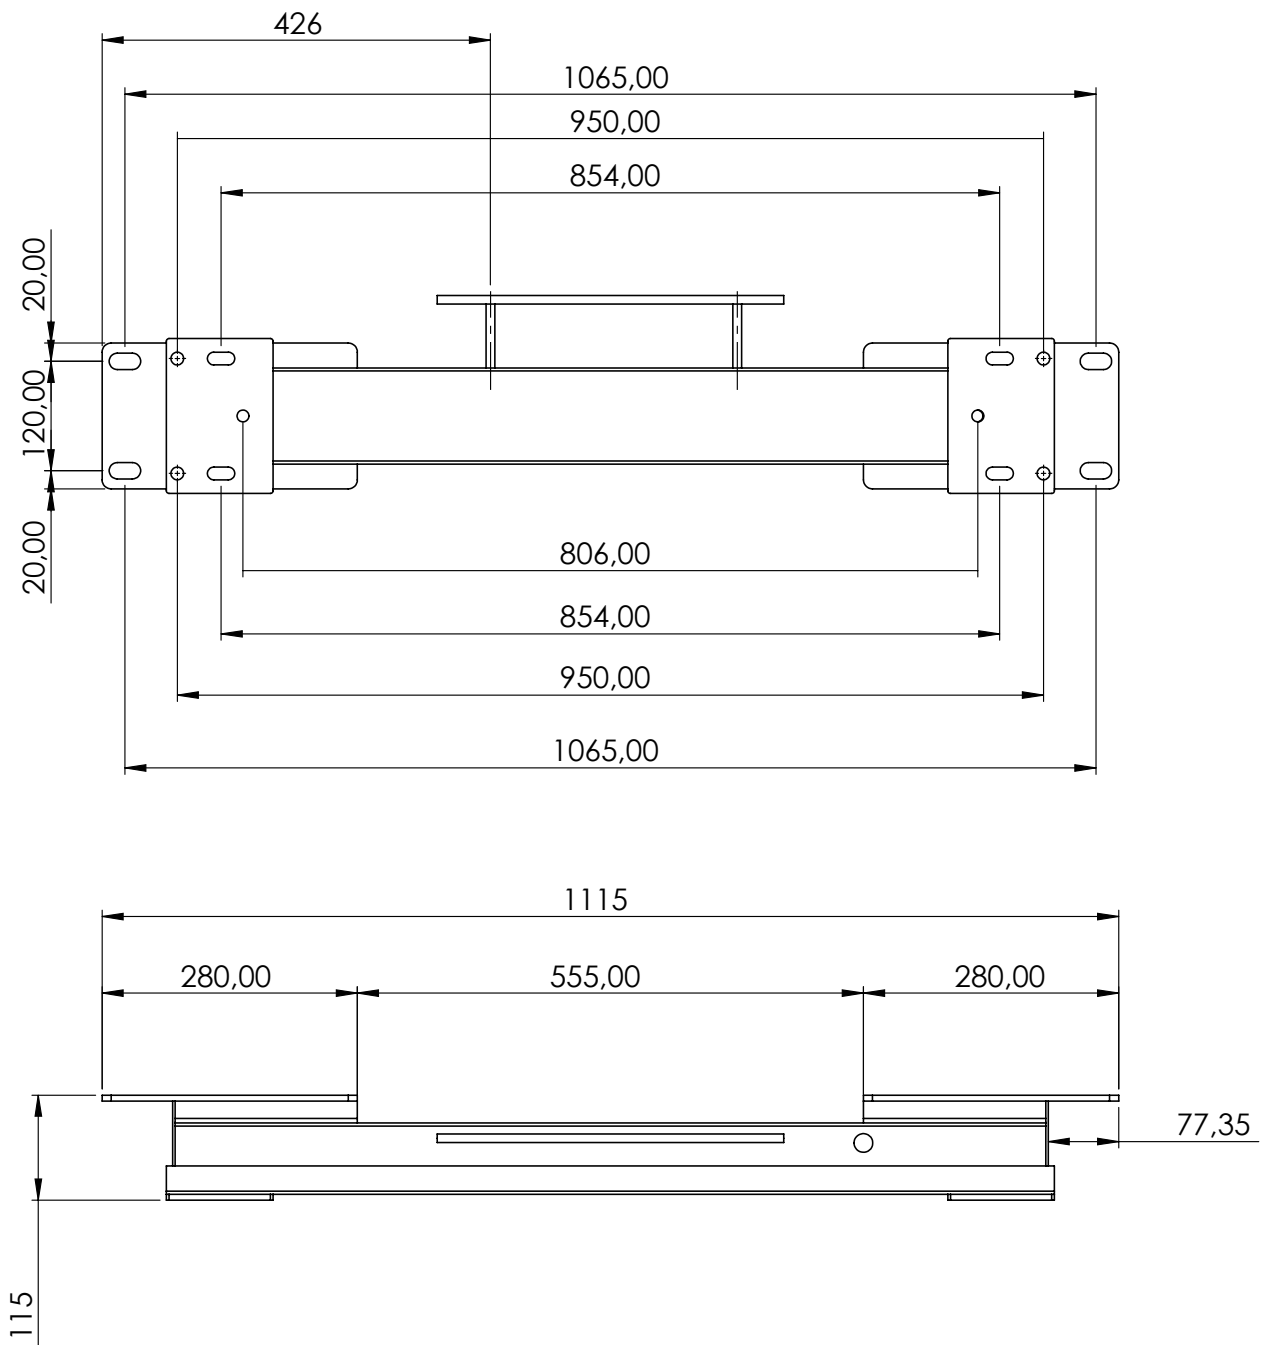

\*imagens ilustrativas, não correspondem ao tamanho real.

## KIT SPECIFICATIONS

| COMPONENT    | DETAILS                                                                                      |
|--------------|----------------------------------------------------------------------------------------------|
| WEIGH BARS   | Built for cattle up to 2,000 kg. Ultra-low profile sits flat on any surface.                 |
| CONNECTIVITY | Your phone receives each weight live - no wires, no transcription.                           |
| POWER        | Runs up to 40 hours on battery. Charges from a truck outlet between sessions.                |
| CARRY CASE   | Sealed against dust and water. Foam interior protects the indicator through rough transport. |

## WT3000-IR-AG INDICATOR TECHNICAL DATA

|                          |                                                                              |
|--------------------------|------------------------------------------------------------------------------|
| Precision                | Class III, up to 10,000 divisions                                            |
| Sample speed             | 80 times/second                                                              |
| Internal resolution      | 1/500.000                                                                    |
| External resolution      | 1/10000                                                                      |
| Cell sensitivity         | uV/d 0,3                                                                     |
| Maximum number of cells  | 8 load cells for 350 $\Omega$                                                |
| Programmable divisions   | 1, 2, 5, 10,20 and 50                                                        |
| Communication interfaces | Bluetooth 4.0.                                                               |
| Power supply             | 12 VDC - can be connected directly to solar power systems or vehicle outlets |
| Autonomy                 | Up to 40h (using a load cell)                                                |
| Operating temperature    | 0 up to 40°C                                                                 |
| Storage temperature      | -20 up to 50°C                                                               |
| Display height           | 55mm                                                                         |
| Display                  | LCD - 6 digits with backlight                                                |

## PART NUMBER

| Products                                 | Codes  |
|------------------------------------------|--------|
| WT3000-IR-AG WeighingBar Pro Scale (kit) | 21400  |
| WT3000-IR-AG Weighing Indicator          | 21401  |
| WEIGH BAR PRO (pair)                     | 21402  |
| AP02 Plus - Portable Eletronic Terminal  | 504711 |
| PT280 - RFID reader                      | 505453 |

## FIND US

10384 W State road 84 #6 - Davie, FL 33324

sales@weightechusa.com

weightechusa.com

Technical Support: +1 (954) 666-0877x302

Sales: +1 (954) 666-0877x305

