

WT-DISPLAY 75-30

REMOTE DISPLAY



**Parameterizable remote display
with 75mm high digits**

WT-DISPLAY 75-30

DISPLAY REMOTO

Weight repeater with 75-mm-high LED matrix digits.
Communication via RS232 serial port or current loop.



COMMUNICATION

- Mode: CURRENT LOOP or RS232 (automatic selection)
- Transmission rate: 600(standard), 1200, 2400, 4800, 9600, 19200 bps
- Data format: 8,N,1.






POWER SUPPLY

- 110-250 power supply.

FULL COMPATIBILITY


- Designed to work in conjunction with the entire range of weight indicators in the Weightech catalog.

OUTLINE DIMENSIONS (in millimeters)

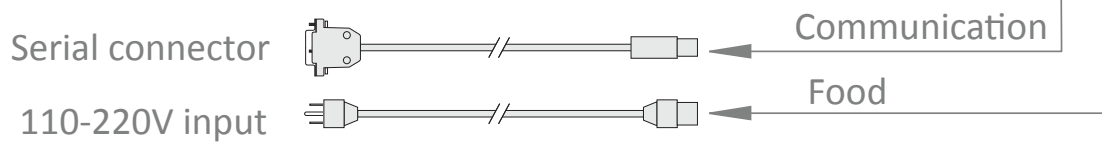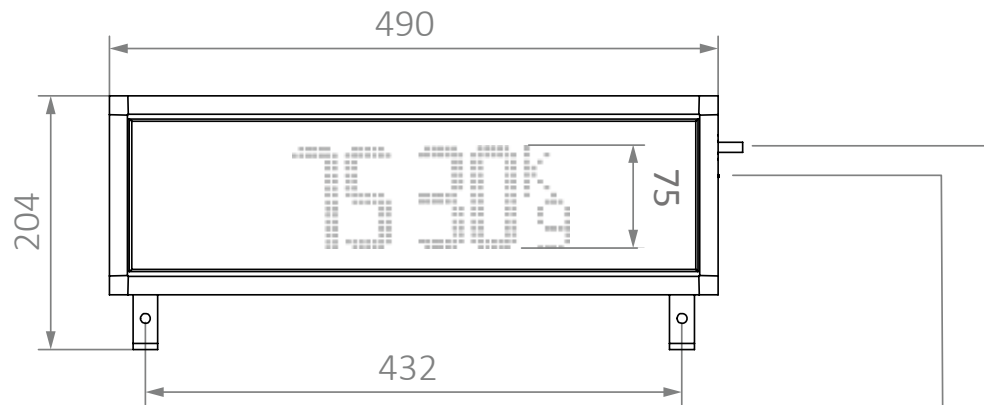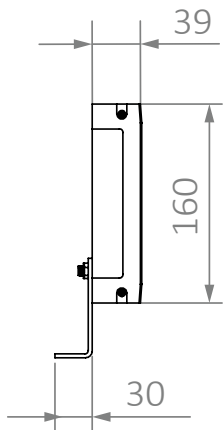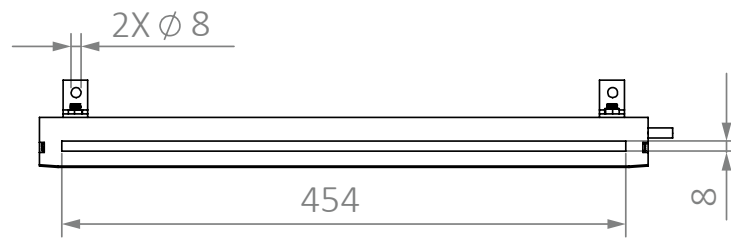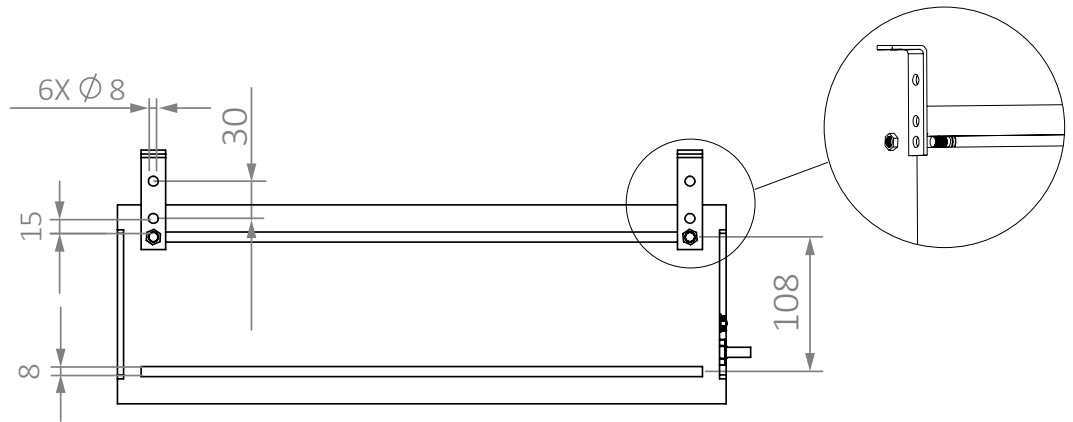


CONNECTION DIAGRAM

Communicating in a current loop, with DR-interface

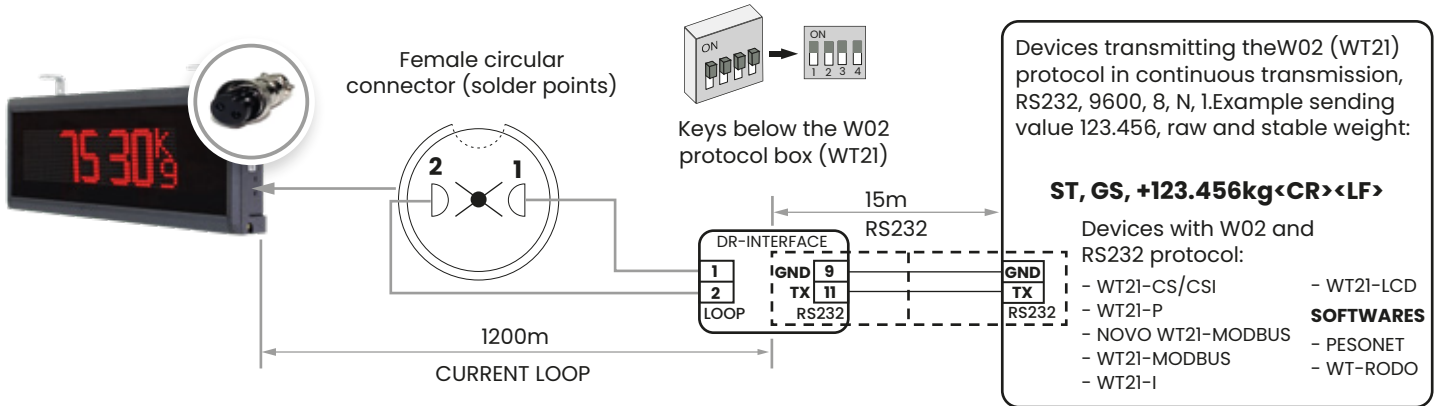


CONNECTION DIAGRAM

Communicating directly via RS232

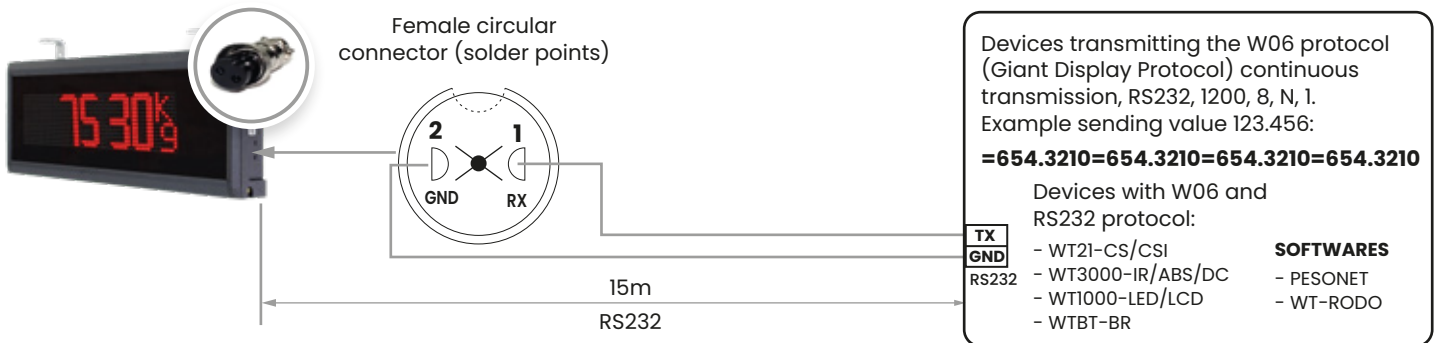

CONNECTION DIAGRAM

Communicating in a current loop directly

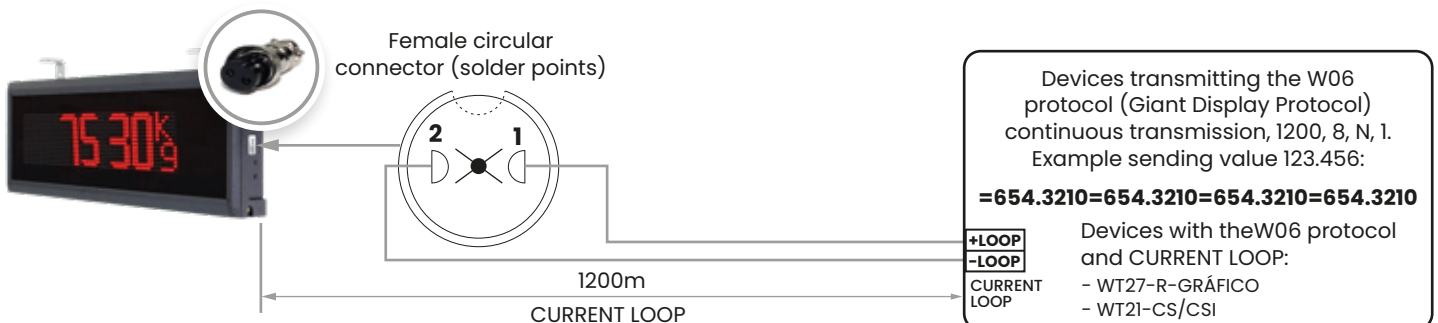

PART NUMBER

| Products | Codes |
|---------------------------------|--------|
| WT-DISPLAY 75-30 Remote Display | 504231 |

FIND US

10384 W State road 84 #6 - Davie, FL 33324
sales@weightechusa.com
weightechusa.com

Technical Support: +1 (954) 666-0877x302

Sales: +1 (954) 666-0877x305

MORE INFO



[PRODUCT PAGE](#)