


**MODEL: 354100 - INPUT MODULE - 2 POINT**

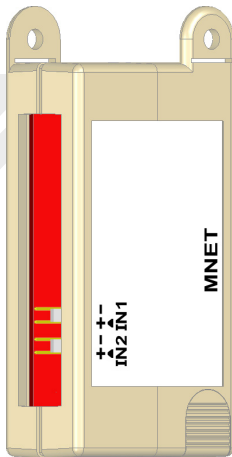

354100

**FEATURES**

- Interfaces fire alarm detector or door alarm to provide
- redundant annunciation through Nurse Console(s)
- Electrical isolation from the contact
- Plug-in connectors for easy service
- Full supervision of the input point and failure annunciation
- of the station location

**SPECIFICATIONS**

**Power Required:** 14.82mA @ 18VDC

**Weight:** 0.2 lbs (0.8 kg)

**Size: W:** 1.6" (4.0 cm)

**D:** 3.4" (8.7 cm)

**H:** 0.9" (2.2 cm)

**Housing and Finish:** High-impact molded Cyclopol  
2950 UL 94-5VB; light gray

**Controls/Indicators:** Two (2) Inputs - Two (2) insulation  
displacement connectors, One (1) M-Net connector

**Terminations:** Plug-on connectors

**DESCRIPTION**

The Responder Input Module - 2 point is designed to interface external latching alarm dry contacts to annunciate through the Responder 5 system. One Input Module - 2 point would be associated with a single fire alarm or door alarm (Auxiliary) contact. The contact can be supervised and annunciated upon failure at the nurse console. The compact size of the Input Module permits its easy mounting in a junction box or corridor light back box. The module is enclosed in a plastic clam shell with (2) two (2) two conductor plug-on insulation displacement connectors.

*Architect and Engineer (A&E) Specifications available online at: [customerconnection.rauland.com](http://customerconnection.rauland.com)  
Specifications subject to change without notice*

©Copyright 2012 Rauland-Borg Corporation Printed in USA Rev 10/2012