

LI382LED Corridor Zone Light

IL898 Specification Sheet

Tek-CARE Nurse Call and CM800 Emergency Call Systems • Rev. 8 - 5/2023

Features

- ▮ Long lasting LEDs
- ▮ No bulb replacement needed
- ▮ Plug-in connector supplied
- ▮ Flame retardant plastic panel

Description

The LI382LED Corridor Zone Light provides visual indication of calls when used with a nurse call system, emergency call system, or similar application.


The LI382LED Corridor Zone Light indicates an emergency call by the rapid flashing of the two red LED bulbs associated with the zone or area from which an emergency call has been placed. Normal calls are indicated by a steady illumination of the two white LEDs. If an emergency and normal call are placed in the same zone at the same time, the red LEDs connected to the emergency station will flash rapidly, while the white LEDs associated with the normal call will maintain a steady illumination.

The standard mounting plate features both single- and dual-gang mounting options.

Required Components

Tek-CARE[®] NC110, NC150, NC200
or
Tek-CARE300II/III Nurse Call System

Tek-CARE[®]500 Wireless Nurse Call System with
NC50xES-series remote receiver
CM800 Emergency Call System with CM800-series speaker
panel

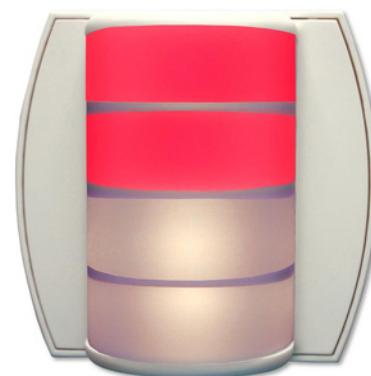

LI382LED Corridor Zone Light

Specifications

Dimensions:	4.8"H × 5.0"W × 2.75"D (122 mm × 127 mm × 70 mm)
LEDs:	2V 20 mA per LED
Power:	24 VDC
Finish:	Base is flame-retardant (UL [®] 94HB) plastic. Lens is flame retardant translucent polycarbonate plastic
Housing:	Fits standard single- or dual-gang box with single- or dual-gang ring

Listings



UL[®] 1069 Listed; UL[®] File Number
E71599.