BE Series - Building Video Intercom





888-556-3998

CAT5 Door Station


BE-D5S




DESCRIPTION


CAT5 system color HD camera outdoor station with proximity access control


DIMENSION





- ► Aluminum alloy panel design with keypad
- ► Proximity access control
- ▶ Powerful password accesss control
- ► Camera's angle is adjustable
- ► Multi entry stations are supported
- ► Compatible with all C5 system models




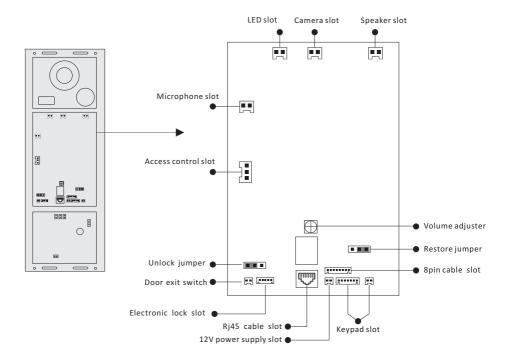









Model No.	BE-D5S
Camera	HD camera
Lens	1.0MP 3.6mm
Resolution	700 TV Lines
IR LED	6 pc
Power Supply	DC 12V
Power Consumption	Standby 1W, working status 5W
Wiring	CAT5 cable
Installation	Flush-mounted
Talking time	45 sec
Monitoring time	30 sec
Operating Temperature	-10°C ~ +60°C
Gross weight	1.8 kg
Dimension	360(H)×130(W)×52(D)mm 14.2 (H)×5.1 (W)×2.0(D)in
Embedded Dimension	350(H)×110(W)×33(D)mm 13.8(H)×4.3 (W)×1.3(D)in

CAT5 Door Station


BE-D628S




DESCRIPTION


CAT5 system color HD camera outdoor station with proximity access control and touch sensor keypad


DIMENSION





- ► Aluminum alloy panel design with touch sensor keypad
- ▶ Proximity access control
- ► Powerful password accesss control
- ► Camera's angle is adjustable
- ► Multi entry stations are supported
- ► Compatible with all C5 system models




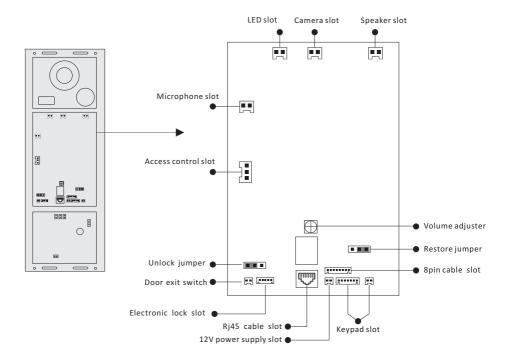









Model No.	BE-D628S HD
Camera	camera 1.0MP
Lens	3.6mm
Resolution	700 TV Lines
IR LED	6 pc
Power Supply	DC 12V
Power Consumption	Standby 1W, working status 5W
Wiring	CAT5 cable
Installation	Flush-mounted
Talking time	45 sec
Monitoring time	30 sec
Operating Temperature	-10°C ~ +60°C
Gross weight	1.8kg
Dimension	360(H)×130(W)×52(D)mm 14.2 (H)×5.1 (W)×2.0(D)in
Embedded Dimension	350(H)×110(W)×33(D)mm 13.8 (H)×4.3 (W)×1.3(D)in

Product Information

CAT5 Indoor Monitor


BE-829-10




DESCRIPTION


 $10\,inch\,Color\,TFT\,Monitor\,with\,touch\,screen$

DIMENSION



- ▶ 10 inch Color TFT screen;
- ► Full mirror-polished glass panel;
- Sensitive touch sensor button with soft backlight;
- ▶ 16pcs 8-chord Melodies for choose freely;
- Compatible with all CAT5 door station;
- ► White and black housing for optional

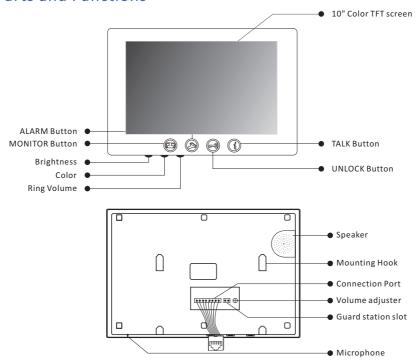



Model No.	BE-829-10 (white or black options)
Screen	10" Color TFT screen
Resolution	1024*600 pixels
Power Supply	DC 18V
Power Consumption	Standby 1W, working status 10W
Wiring	CAT5 cable
Installation	Wall-mounted
Ringtone	16 types
Talking time	45 sec
Monitoring time	30 sec
Operating Temperature	-10°C ~ +60°C
Gross weight	1.3kg
Dimension	285(H)×190(W)×28(D)mm 11.2 (H)×7.5 (W)×1.1(D)in

Product Information

CAT5 Indoor Monitor

Standard Units (BE-V5-7 Black) (BE-V5-7 White)
Picture Memory (BE-V5-7R Black) (BE-V5-7RW White)


BE-V5-7




DESCRIPTION


7 inch Color TFT Monitor with touch screen and picture memory

DIMENSION



- ▶ 7 inch color TFT screen:
- ► Mirror-polished Panel;
- Sensitive touch sensor button with soft
 - backlight;
- ▶ 16pcs 8-chord Melodies for choose freely;
- ► Compatible with all CAT5 door station;
- ► Picture memory for optional
- ► White and black housing for optional

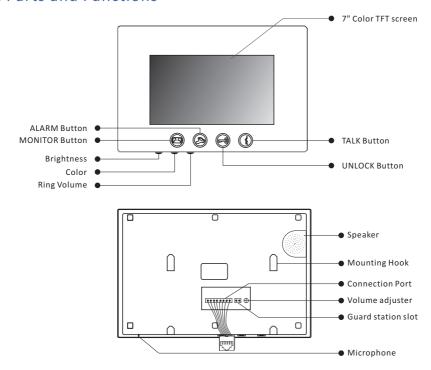




Model No.	BE-V5-7 (white, black & options)
Screen	7" digital TFT screen
Resolution	800*480 pixels
Power Supply	DC 18V
Power Consumption	Standby 1W, working status 8W
Wiring	CAT5 cable
Installation	Wall-mounted
Ringtone	16 types
Talking time	45 sec
Monitoring time	30 sec
Operating Temperature	-10°C ~ +60°C
Gross weight	1kg
Dimension	240(H)×160(W)×28(D)mm 6.3 (H)×9.4 (W)×1.1(D)in

Standard Units (BE-836T-B Black) (BE-836T-W White)


BE-836T




DESCRIPTION


CAT5 system 7 inch color TFT Monitor with touch screen


DIMENSION




- ▶7 inch color TFT screen;
- ► Ultra-thin pad design with 18mm thickness;
- Sensitive touch sensor button with soft backlight;
- ▶16pcs 8-chord Melodies for choose freely;
- ► Compatible with all CAT5 door station;
- ► White and black housing for optional

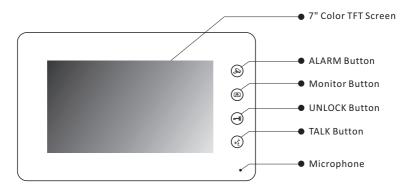

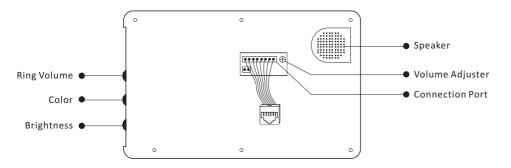






Model No.	BE-836T (White & Black Options)
Screen	7" Color TFT screen
Resolution	800*480 pixels
Power Supply	DC 18V
Power Consumption	Standby 1W, working status 8W
Wiring	CAT5 cable
Installation	Wall-mounted
Ringtone	16 types
Talking time	45 sec
Monitoring time	30 sec
Operating Temperature	-10°C ∼ +60°C
Gross weight	0.65kg
Dimension	220(H)×130(W)×18(D)mm 8.7 (H)×5.1 (W)×0.7(D)in

Product Information

CAT5 Indoor Monitor


BE-802




DESCRIPTION


CAT5 system 7 inch color TFT Monitor


DIMENSION



- ▶ 7 inch color TFT screen;
- ► 16pcs 8-chord Melodies for choose freely;
- ▶ Compatible with all CAT5 door station

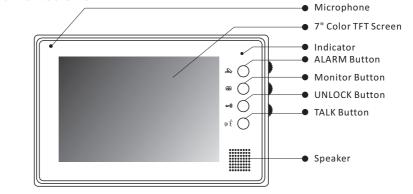

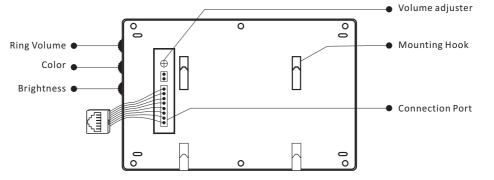


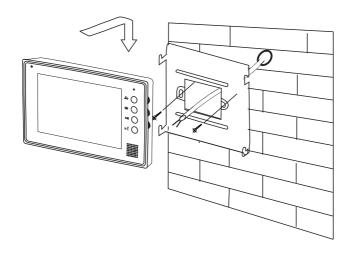

Model No.	BE-802
Screen	7" Color TFT screen
Resolution	800*480 pixels
Power Supply	DC 18V
Power Consumption	Standby 1W, working status 8W
Wiring	CAT5 cable
Installation	Wall-mounted
Ringtone	16 types
Talking time	45 sec
Monitoring time	30 sec
Operating Temperature	-10°C ~ +60°C
Gross weight	0.8 kg
Dimension	225(H)×155(W)×28(D)mm 8.9 (H)×6.1 (W)×1.1(D)in

CAT5 Indoor Monitor


BE-822B




DESCRIPTION


CAT5 system 4.3 inch color TFT Monitor

DIMENSION



- ▶ 4.3 inch color TFT screen;
- ▶ 16pcs 8-chord Melodies for choose freely;
- ► Compatible with all CAT5 door station

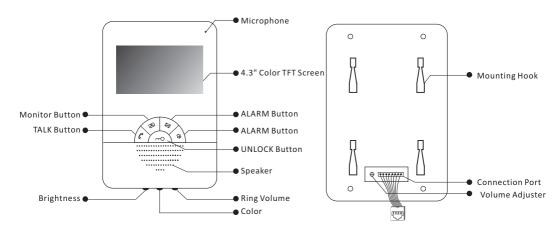




Model No.	BE-822B
Screen	4.3" Color TFT screen
Resolution	480*320 pixels
Power Supply	DC 18V
Power Consumption	Standby 1W, working status 4W
Wiring	CAT5 cable
Installation	Wall-mounted
Ringtone	16 types
Talking time	45 sec
Monitoring time	30 sec
Operating Temperature	-10°C ~ +60°C
Gross weight	0.5 kg
Dimension	198(H)×125(W)×25(D)mm 7.8 (H)×4.9 (W)×1.0(D)in

CAT5 Indoor Monitor


BE-830




DESCRIPTION


CAT5 system 4.3 inch color TFT Monitor


DIMENSION



- ▶ 4.3 inch color TFT screen;
- ▶ 16pcs 8-chord Melodies for choose freely;
- Compatible with all CAT5 door station;
- White and black housing for optional



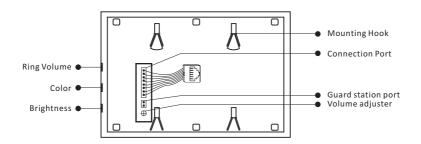




Model No.	BE-830 (White & Black Options)
Screen	4.3" Color TFT screen
Resolution	480*320 pixels
Power Supply	DC 18V
Power Consumption	Standby 1W, working status 4W
Wiring	CAT5 cable
Installation	Wall-mounted
Ringtone	16 types
Talking time	45 sec
Monitoring time	30 sec
Operating Temperature	-10°C ~ +60°C
Gross weight	0.5 kg
Dimension	180(H)×119(W)×28(D)mm
	7.1 (H)×4.7 (W)×1.1(D)in

(BE-831WB White) (BE-831BB Black) (BE-831GB Gold)


BE-831




DESCRIPTION


CAT5 system 4.3 inch color TFT Monitor

DIMENSION



- ▶ 4.3 inch color TFT screen;
- ► 16pcs 8-chord Melodies for choose freely;
- ► Compatible with all CAT5 door station;
- ▶ White, black and gold housing for optional

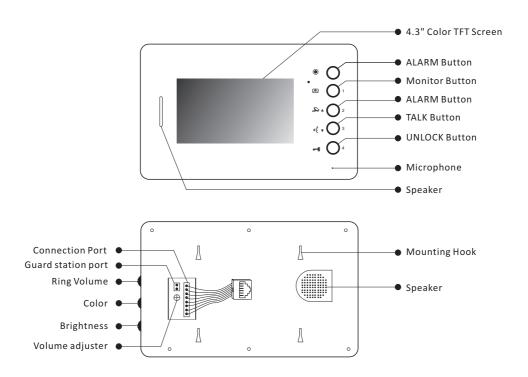



Model No.	BE-831 (White, Black & Gold)
Screen	4.3" Color TFT screen
Resolution	480*320 pixels
Power Supply	DC 18V
Power Consumption	Standby 1W, working status 4W
Wiring	CAT5 cable
Installation	Wall-mounted
Ringtone	16 types
Talking time	45 sec
Monitoring time	30 sec
Operating Temperature	-10°C ~ +60°C
Gross weight	0.5 kg
Dimension	198(H)×125(W)×25(D)mm 7.8 (H)×4.9 (W)×1.0(D)in


CAT5 Video Distributor BE-LA6 (6 ports) BE-LA4 (4 ports)




DESCRIPTION


CAT5 system branch controller with six monitors

DIMENSION



- ► Branch controller for 6 apartments and serve as floor distributor;
- ► RJ45 connection port;
- Strong anti-interference ability;
- ► Signal isolation device;

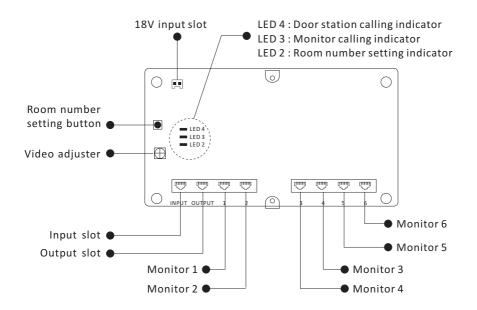

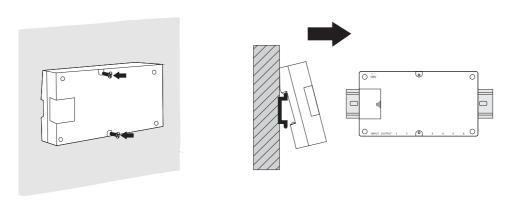

Direct wall-mounted

DIN-Rail mounted

Model No.	BE-LA6 (6 ports) - BE-LA4 (4 ports)
Power Supply	DC 18V - 20V
Standby current	20mA
Working current	90mA
Wiring	CAT5 cable
Working Temperature	-10°C ∼ +60°C
Gross weight	0.4 kg
Dimension	160(H)×90(W)×40(D)mm 6.3 (H)×3.5 (W)×1.6(D)in

Product Information

CAT5 Accessories

BE-PS-12

BE-PS-18






For door station only (12V)

For layer adapter only (18V)


DESCRIPTION


CAT5 system power supply with metal box

DIMENSION




- ► Metal box mounting
- ► Output: DC12V 1A DC18V 3A

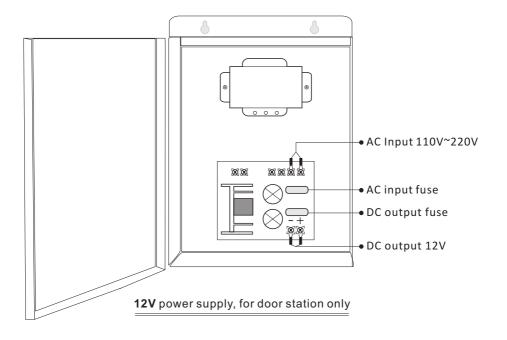

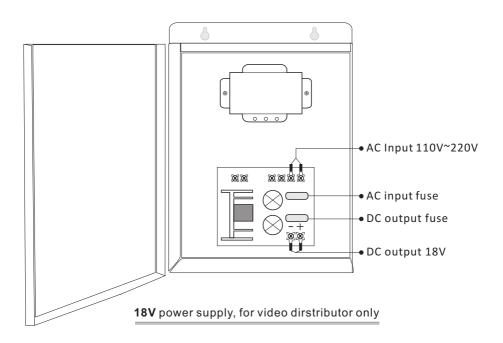

2. Installation

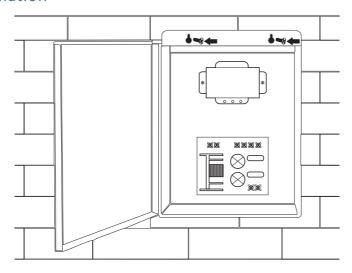

12V power supply, for door station only	
Model No.	BE-PS-12
Input voltage	AC 110V ~ 220V
Output voltage	DC 12V
Output current	1A
Input frequency	50-60Hz
Working Temperature	-10°C ~ +60°C
Gross weight	1.3kg
Dimension	200(H)×138(W)×53(D)mm
	7.9 (H) \times 5.4 (W) \times 2.1(D)in

18V power supply, for layer adapter only	
Model No.	BE-PS-18
Input voltage	AC 110V ~ 220V
Output voltage	DC 18V
Output current	3A
Input frequency	50-60Hz
Working Temperature	-10°C ~ +60°C
Gross weight	1.8kg
Dimension	200(H)×138(W)×53(D)mm
	7.9 (H) \times 5.4 (W) \times 2.1(D)in