


MODEL: DCA214D — DUTY DOMELESS CONTROLLER

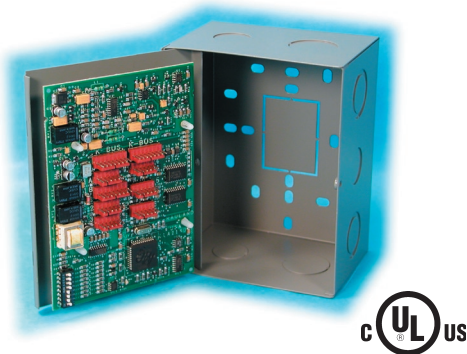

DCA214D

FEATURES

- Generates necessary tones when used in conjunction with R4KDY Duty Station
- Supports up to five (5) non-audio stations and one (1) R4KDY Duty Station
- Located in areas where duty station is present and corridor light is not needed or desired
- Serves as hub for all room wiring

SPECIFICATIONS

Power Required: 15.5V @ 58 mA

Weight: 1.15 lbs. (0.52 kg)

Size: W: 4.25" (10.80 cm)

H: 5.50" (13.97 cm)

D: 3.00" (7.62 cm)

Housing & Finish: 20 gauge steel, painted primer gray

Controls: K-bus DIP switch address

Terminations: Modular plug-on connectors (power, data, audio)

Backbox Options: Steel City 58371 3/4R, Raco 561, or any other single gang backbox. Mounting plate allows for mounting to North or South American, or European style single and dual gang backboxes. The metal housing also permits DCA214D to be located above ceiling tiles or into a wall

Certification: UL/C-UL 1069

DESCRIPTION

The DCA214D Duty Domeless Controller is typically located where there is a R4KDY Duty Station and a corridor light is not needed or desired. The DCA214D supports up to five (5) non-audio stations and one (1) R4KDY Duty Station.

The DCA214D mounts onto a variety of single and dual gang backboxes. The metal housing allows for the controller to sit above ceiling tiles or to be placed into a wall. The DCA214D is continuously supervised for both power and data signal.

ASSOCIATED EQUIPMENT

R4KDY — Duty Station

R4KTMB — K-bus Termination Board

R4KPR400 — Power Supply

Architects and Engineers Specifications available on disk. Specifications subject to change without notice.

Rauland-Borg Corporation

3450 West Oakton Street • Skokie, IL 60076-2958 • (847) 679-0900 • (847) 679-0625 Fax • www.rauland.com
In Canada: 4025 Sladeview Crescent, Units 4-6 • Mississauga, ON CANADA L5L 5Y1 • (905) 607-2335 • (905) 607-3554 Fax

