


MODEL: R4KDLC2 — DUAL LIGHTING CONTROL MODULE



R4KDLC2

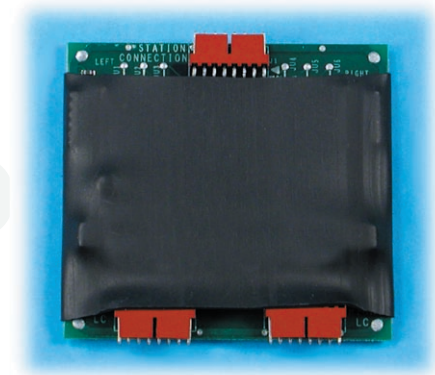

FEATURES

- Provides 4 isolated low-voltage outputs (per pillow speaker - per bed) for connection to high-voltage lighting controller
- Pigtail wire connector for easy installation
- Protective shrink-wrapped cover for location in quad wiring boxes

SPECIFICATIONS

Power Required: 15.5V @ 23mA

Size: W: 3.25" (8.26 cm)
H: 3.18" (8.08 cm)
D: 0.5" (1.27 cm)

Controls: 8 Normally Open Active Outputs – 4 per bed

Terminations: Pre-wired pigtail, plug-on connector

Certification: UL/C-UL 1069



DESCRIPTION

The R4KDLC2 – Dual Lighting Control Module provides total Pillow Speaker isolation for lighting relays (auxiliary device which is non-UL 1069 listed). The R4KDLC2 is associated with the R4K23VA Dual Audio Enhanced Bed Station and the R4K25LV Dual Enhanced Patient Station - Non Speech. The module provides two pre-wired pigtail outputs (low-voltage) to interface with lighting relays on a controller to switch high-voltage on lights.

An R4KDLC2 is required for all Pillow Speakers with lighting control (remote device interface) except when the Pillow Speaker is only interfaced to a UL listed hospital grade television and no other devices.

ASSOCIATED EQUIPMENT

R4K23VA — Audio Dual Patient Station

R4K25LV — Dual Enhanced Patient Station - Non Speech

NCES/NCDS — Pillow Speaker Series

NCLV120/NCLV240 — High Voltage Light Switch Controller



Architects and Engineers Specifications available on disk. Specifications subject to change without notice.

Rauland-Borg Corporation

3450 West Oakton Street • Skokie, IL 60076-2958 • (847) 679-0900 • (847) 679-4106 Fax • www.rauland.com
In Canada: 4025 Sladeview Crescent, Units 4-6 • Mississauga, ON CANADA L5L 5Y1 • (905) 607-2335 • (905) 607-3554 Fax

