


MODEL: R4KSLC1 — Single Lighting Control Module



R4KSLC1

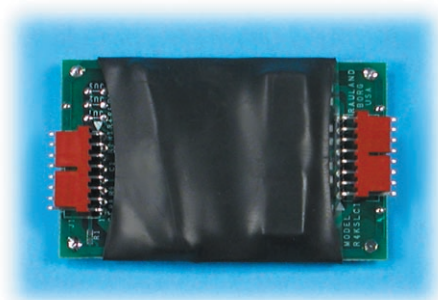

FEATURES

- Provides 4 low-voltage outputs for connection to high-voltage lighting controller
- Pigtail wire connector for easy installation
- Protective shrink-wrapped cover for location in quad wiring boxes

SPECIFICATIONS

Power Required: 15.5V @ 13mA

Contact Ratings:

Size: W: 1.88" (4.78 cm)
H: 3.00" (7.62 cm)
D: 0.50" (1.27 cm)

Controls: 4 Normally Open Active Outputs

Terminations: Pre-wired pigtail, plug-on connector

Certification: UL/C-UL 1069

DESCRIPTION

The R4KSLC1 – Single Lighting Control Module provides total Pillow Speaker isolation for lighting relays (auxiliary device which is non-UL 1069 listed). The R4KSLC1 is associated with the R4K13VA Audio Enhanced Patient Station and the R4K16LA Single Enhanced Patient Station - Non Speech. The module provides a pre-wired pigtails output (low-voltage) to interface with lighting relays on a controller to switch high-voltage on lights.

An R4KSLC1 is required for all Pillow Speakers with lighting control (remote device interface) except when the Pillow Speaker is only interfaced to a UL listed hospital grade television and no other devices.

ASSOCIATED EQUIPMENT

R4K13VA — Audio Single Patient Station

R4K16LA — Single Enhanced Patient Station - Non Speech

NCES/NCDS — Pillow Speaker Series

NCLV120/NCLV240 — High Voltage Light Switch Controller

Architects and Engineers Specifications available on disk. Specifications subject to change without notice.

Rauland-Borg Corporation

3450 West Oakton Street • Skokie, IL 60076-2958 • (847) 679-0900 • (847) 679-4106 Fax • www.rauland.com
In Canada: 4025 Sladeview Crescent, Units 4-6 • Mississauga, ON CANADA L5L 5Y1 • (905) 607-2335 • (905) 607-3554 Fax

