


**MODEL: DCA216 — 16-POINT AUDIO DOMELESS ROOM CONTROLLER**



DCA216

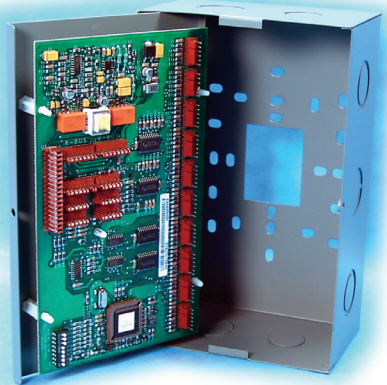

**FEATURES**

- Used in conjunction with an audio-visual system
- Located in areas where corridor light is not needed or desired
- Adds additional room stations in a ward environment
- Other corridor lights can be programmed to reflect calls placed on patient stations connected to a domeless room controller
- Supports up to sixteen (16) call-in stations, one (1) of which can have audio capability
- With addition of CLAR4 the corridor light supports sixteen (16) call-in stations, four (4) of which can have audio capability
- Serves as hub for all room wiring

**SPECIFICATIONS**

**Power Required:** 15.5 v @ 68 mA

**Weight:** 1.80 lbs. (0.82 kg)

**Size: W:** 5.00" (12.70 cm)

**H:** 8.00" (20.32 cm)

**D:** 3.00" (7.62 cm)

**Housing and Finish:** 20 gauge steel, painted primer gray

**Controls:** K-bus DIP switch address

**Terminations:** Modular plug-on connectors (power, data, audio)

**Backbox Requirements:** Steel City 58371 3/4R, Raco 561, or any other single gang backbox. The mounting hole pattern on the housing allows for North American, South American, and European style single and dual gang backboxes. The metal housing also permits the DCA216 to be located above ceiling tiles or to be placed into a wall.

**Certification:** Designed for compliance to UL/C-UL 1069, FCC Part 15 Class A, IEC 60950, CE, FDA Registered, and RoHS Compliant

**DESCRIPTION**

The DCA216 is typically located where a corridor light is not needed or desired. The controller provides annunciation at the associated console of calls originating from bedside, bath/emergency, and code stations as well as service requirements and staff registrations. The DCA216 can also be installed in areas where additional room stations are needed such as in a ward environment. Other corridor lights can be programmed to reflect calls placed on patient stations connected to a domeless room controller.

Used in an audio-visual system, the DCA216 supports up to sixteen (16) call-in stations, one (1) of which can have audio capability. With the addition of a CLAR4 the corridor light supports

sixteen (16) call-in stations, four (4) of which can have audio capability.

The DCA216 mounts onto a variety of single and dual gang backboxes. The metal housing allows for the controller to sit above ceiling tiles or to be placed into a wall. The DCA216 is continuously supervised for both power and data signal.

*Architect and Engineer (A&E) Specifications available online at: [customerconnection.rauland.com](http://customerconnection.rauland.com)  
 Specifications subject to change without notice*

©Copyright 2014 Rauland-Borg Corporation Printed in USA Rev 04/2014