

MT-2-4 2-wire Video Distributor



FEATURES

- Can be used as 4 inputs (Outdoor stations) controller or 4 outputs (Indoor monitor)
- Separate isolation protection without affecting another devices on the bus system;
- Short-circuit indication for convenient maintenance;
- Periodic self-detection mechanism for recovery.


SPECIFICATIONS

Power supply: Working Temperature: Wiring: Dimension: DC20~30V -10°C ~ +40° C 2-wires (Non-polarity) 89(H)×71(W)×45(D)mm

DESCRIPTION

2-wire system Video Distributor

DIMENSION






Toll-Free: 888.556.3998 Phone: 716.689.0871 Address: 5225 Sheridan Drive, Georgetown Square Williamsville, New York 14221 E-mail: support@becsolutionsllc.com



MT-2-4 2-wire Video Distributor

PARTS AND FUNCTIONS

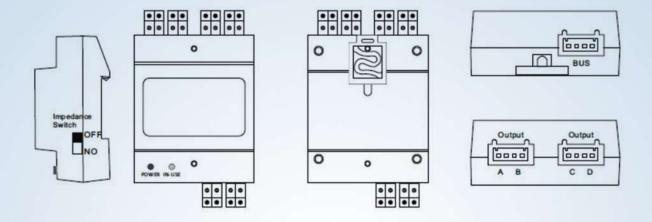

IN-USE: Status indicator, it will light up when receives signal.


POWER: Working indicator, it will light up when plugs in power supply.

Impedance Switch: Video match switch, the last video distributor at the end of the bus should set ON to match the video impedance, the power indicator will turn to orange after setting. Bus: Input port bus connection port


Bus: Input port, bus connection port.

A,B,C,D: Output port, connect to indoor monitors or door stations.

INSTALLATION



Direct wall-mounted



DIN-Rail mounted



Toll-Free: 888.556.3998 Phone: 716.689.0871 Address: 5225 Sheridan Drive, Georgetown Square Williamsville, New York 14221 E-mail: support@becsolutionsllc.com