





DESCRIPTION

Comparing with 902 Android intercom system, 280 Linux intercom system is more cost-effective. It offers multiple functions, including video intercom, door access, emergency call, security alarm, and property management, etc. It also supports communication with IP phone or SIP softphone, etc. via SIP protocol, and can be used with home automation and lift control system.

KEY FEATURES

- Open the door by IC/ID card (20,000 users) or password
- Elevator control
- Home automation
- Standard SIP 2.0

DIMENSION & INSTALLATION

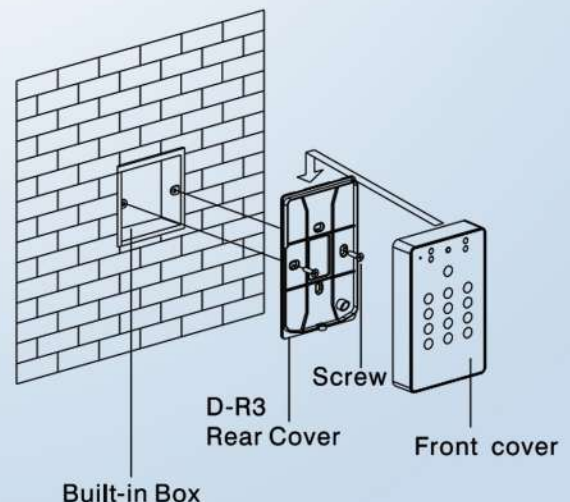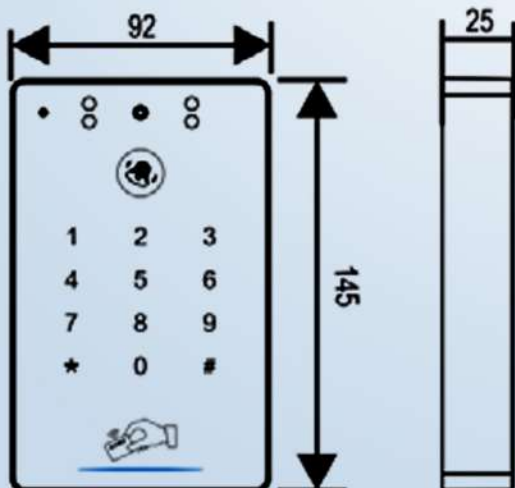

SPECIFICATIONS

Physical Property

System:	Linux
CPU:	1GHz, ARM Cortex-A7
SDRAM:	128MB
Flash:	64M DDR2
Product Size:	145x92x25(mm)
Power:	DC12V
Standby power:	1.5W
Rated Power:	3W
RFID Card Reader:	IC/ID (Optional), 20,000 pcs
Button:	Touch
Temperature:	-40°C - +70°C
Humidity:	20%-93%
IP Class:	IP55

Audio & Video

Audio Codec	G.711
Video Codec	H.264
Camera	CMOS 1M pixel
LED Night Vision	Yes

Network & Interface

Ethernet	10M/100Mbps, RJ-45
Protocol	TCP/IP, SIP
Unlock circuit	Yes (Withstand max current 1A for lock)
Exit Button	Yes
RS485	Yes
Door Magnetic	Yes