


MODEL: R5K SINGLE LIGHT CONTROL MODULE



R4KSLC1

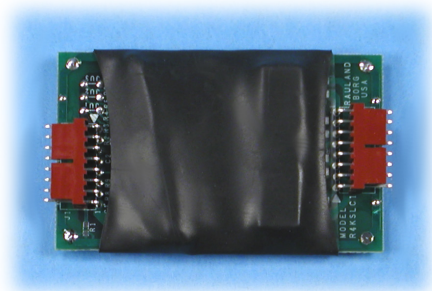

FEATURES

- Provides 4 low-voltage outputs for connection to high-voltage lighting controller
- Pigtail wire connector for easy installation
- Protective shrink-wrapped cover for location in quad wiring boxes

SPECIFICATIONS

Power Required: 15.5V @ 13mA

Contact Ratings:

Size: W: 1.88" (4.78 cm)

H: 3.00" (7.62 cm)

D: 0.50" (1.27 cm)

Controls: 4 Normally Open Active Outputs

Terminations: Pre-wired pigtail, plug-on connector

Certification: Designed for compliance to ANSI/UL 1069, IEC 60950, CE, RoHS / WEEE Compliant. Assembled in a U.S. FDA Registered facility.

DESCRIPTION

The R5K R4KSLC1 provides total Pillow Speaker isolation for lighting relays (auxiliary device which is non-UL 1069 listed). The R4KSLC1 is associated with the R4K13VA Audio Enhanced Patient Station, R4K16LV Single Enhanced Patient Station - Non Speech, R4K17V Single Enhanced Patient Station, and R5KPS1EA Audio Enhanced Single Patient Station. The module provides a pre-wired pigtails output (low-voltage) to interface with lighting relays on a controller to switch high-voltage on lights.

An R4KSLC1 is required for all Pillow Speakers and CCDIN3 call cord with lighting control (remote device interface) except when the Pillow Speaker is only interfaced to a UL listed hospital grade television and no other devices. This module is not used on the R5KPS1LCA which contains built-in lighting control.