## Irwanto 31

by Irwanto Irwanto

**Submission date:** 14-Jul-2022 10:08AM (UTC+0700)

**Submission ID:** 1870305184


File name: SolarRadiationPotential\_IOSRJournal.pdf (777.55K)

Word count: 2635

**Character count:** 13187



### Solar Radiation Potential as Energy Source of Photovoltaic Powered Uninterrupted Power Supply in Perlis, Northern Malaysia

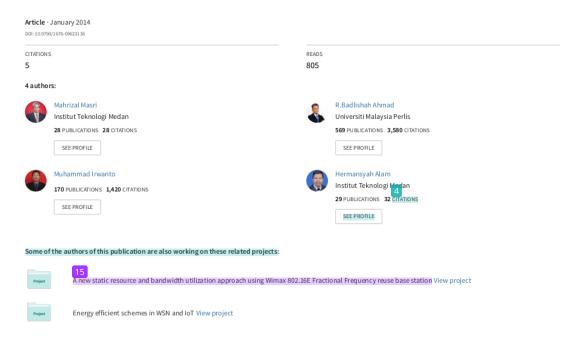

#### Solar Radiation Potential as Energy Source of Photovoltaic Powered Uninterrupted Power Supply in Perlis, Northern Malaysia

Malitzal Masri<sup>1</sup>, R. Badlishah<sup>2</sup>, Muhammad Irwanto<sup>3</sup>, Hermansyah Alam<sup>4</sup> (Department of Electrical Engineering, Medan Institute of Technology, Medan, Indonesia)
<sup>2</sup> (School of Computer and Communication, Universiti Malaysia Perlis, Perlis, Malaysia)

**Abstract:** This paper presents analysis of the solar radiation characteristics as energy source of photovoltaic (PV) powered uninterrupted power supply (PV-UPS) in Perlis, Northern Malaysia for the year of 2011 to 2013. The characteristics consist of daily, monthly and annual solar radiation. Peak sun hours (PSHs) of the solar radiation and PV power generation capacity are also analyzed. The potential of solar radiation—as energy source of PV-UPS based on their values. They are low solar radiation (below 2.6 kWh/m²), moderate solar radiation (between 2.6 – 3 kWh/m²), high solar radiation (between 3-4 kWh/m²) and very high solar radiation (botween 4 kWh/m²). The results show that the average monthly solar radiation for the past three years is 4.8 kWh/m². The annual total solar radiation in Perlis is 1761.1 kWh/m² which will generate a total electric energy of 228.9 kW/m² per year of PV module, if all the lands in Perlis are filled with horizontal PV panels, nearly 181.97 GWh of electricity could be produced per year. This shows the big potential of solar radiation for PV UPS in Perlis, Northern Malaysia.

Keywords: Solar radiation; Peak sun hours (PSHs); Photovoltaic; Uninterrupted power supply

#### I. Introduction

Energy is one of the essential inputs for economic development and industrial 22 ion. Fossil fuels are the main resources and play a crucial role to supply world energy demand. However, 7 ssil fuel reserves are limited and usage of fossil fuel sources has negative environment impact. Therefore, management of energy sources, rational utilization of energy, and renewable energy source usage are vital [1].

Renewable energy has an increasing role in achieving the goals of sustainable development, energy security and environmental protection. Nowadays, it has been recognized as one of the most promising clean energy over the world because of its falling cost, while other renewable energy technologies are becoming more expensive [2].

Solar radiation is the result of fusion of atoms inside the sun. Part of the energy from the fusion process heats the chromosphere, the outer layer of the sun that is much cooler than the interior of the sun, and the radiation from the cliff mosphere becomes the solar radiation incident on the earth [3].

When the solar radiation enters the earth's atmosphere (figure. 1), a part of the incident energy is removed by scattering or a sorption by air molecules, clouds and particulate matter usually referred to as aerosols. The radiation 13 t 19 not reflected or scattered and reaches the surface directly in line from the PV module is called beam radiation. The scattered radiation which reaches the ground is called diffuse radiation. Some of the radiation may reach a receive after reflection from the ground, and is called the albedo. The total solar radiation on a horizontal surface of PV module consisting three components is called global irradiance. When the skies are clear and the sun is directly in line from the PV module, the global irradiance is about 1000 W/m² [4]. Although the global irradiance on the surface of the earth can be as high as 1000 W/m², the available radiation is usually considerably lower than this maximum value due to the rotation on the earth and climate condition (cloud cover), as well as by the general composition of the atmosphere. For this reason, the solar radiation data is the most important component to estimate output of photovoltaic systems [3], [5],[6]. Solar radiation is greater than 3 kWh/m² indicates that the sky is clear, its intensity very high and very good for PV application [7].




Fig. 1. Solar radiation on the earth's atmosphere

#### II. Methodology

The data collection of solar radiation for this present are obtained from the Centre of Excellence for Renewable Energy (CERE) Station in Kangar, Perlis, Northern Malaysia, which its area loc 28 n is as shown in Perlis's map in figure. 2. The weather station at CERE 27 es Vantage Weather Station Pro2. Solar radiation data are recorded every minute by the weather station. The solar radiation data are recorded every minute as purpose of analysis. It is monitored from at 07.00 am until 07.00 pm. This is to obtain average daily solar radiation.



Fig. 2. CERE Station in Kangar, Perlis, Northern Malaysia

Matlab program is used to perform the daily and monthly solar radiation data throughout year 2011 to 2013. The profile of the data will be processed and consequently plotted using Matlab which are stated as below.

- The daily solar radiation data in MJ/m<sup>2</sup> are stated into a column of 365 which significant the number of days in a year throughout year 2011 to 2013.
- The daily solar radiation is converted to Wh/m<sup>2</sup> by multiplying each element of the matrix with 1000000/3600. It is suitable relationship between units of MJ/m<sup>2</sup> and Wh/m<sup>2</sup> as stated below.
  - $1 \text{ MJ/m}^2 = 1 \times 10^6 \text{ Ws/m}^2$ =1000000/3600 Wh/m<sup>2</sup>
- The daily and monthly solar radiations are plotted for each year. Their maximum, minimum, average and annual total solar radiation data are calculated.
- 4. The data of daily solar radiation, minimum, maximum and average monthly solar radiations are evaluated. The lowest minimum, the highest maximum and the highest average values are determined and shown in a table and graph format.

- 5. Distribution of the daily solar radiation is classified as 1 2 kWh/m², 2 3 kWh/m², 3 4 kWh/m², 4 5 kWh/m², 5 6 kWh/m², 6 7 kWh/m², and 7 8 kWh/m² which is related to the number of days in a year. It is also based on solar radiation classification by [8] who stated that solar radiation can be classified into four categorizes. They are low solar radiation (below 2.6 kWh/m²), moderate solar radiation (between 2.6 3 kWh/m²), high solar radiation (between 3-4 kWh/m²) and very high solar radiation (above 4 kWh/m²). It is important to know the skies condition and its potential towards PV application in Perlis, Northern Malaysia.
- 6. The monthly solar radiations are divided b 1000 W/m² to obtain the peak sun hours (PSHs). Weixiang et al. (2005) explained that peak sun hours (PSHs) is the length of time in hours at a radiation level of 1000 W/m² needed 29 produce energy equivalent to the total energy in one day or it is ratio of solar radiation (Wh/m²) to solar radiation level of 1000 W/m². Values of PSHs are plotted in a bar graph format. Their minimum, maximum and average value are calculated and displayed in a table.
- 7. In order to estimate the potential generating of PV module, it is necessary to estimate the area which is suitable for PV integration. The efficiency of PV module is an important figure for the estimation of PV output. A conservative value of 13 % for paular single crystalline silicon modules was used although higher efficiency modules are available [7]. The annual potential electricity generating capacity from PV systems, Equal, can be estimated by [7]

$$E_{\text{out}} = \left(\sum E_{\text{solar,i}}\right) x A_{i} \times \eta_{\text{pv}} \times f \tag{1}$$

where 3

E available solar radiation on different orientation surfaces

A. = area of orientation surface,i

 $\eta_{pv}$  = efficiency of PV modules

f = utilization factor

#### III. Results And Discussion

3.1 Daily Solar Radiation

The daily solar radiation data in Perlis through the year of 2011 to 2013 is shown in figure. 3 The minimum, maximum daily solar radiation and its average for each year are shown in Table 1. It was recorded at Centre of Excellent for Renewable Energy (CERE) Station, Kangar. From the daily solar radiation data, the monthly, annual and PSHs can be obtained and analyzed.




Fig.3. Daily solar radiation through the year of 2011 to 2013

Table 1. Minimum, maximum and average solar radiation through the year of 2009 to 2011

|      | Solar radiation (Wh/m²) |         |         |
|------|-------------------------|---------|---------|
|      | Minimum                 | Maximum | Average |
| 2011 | 447.22                  | 7108.33 | 4566.76 |
| 2012 | 435.11                  | 7108.61 | 4886.68 |
| 2013 | 277.8                   | 7239    | 5005    |

Based on figure. 3, there are only two, one and two days in 2011, 2012 and 2013, respectively that had the daily solar radiation below  $1000 \text{ Wh/m}^2$ . The minimum solar radiations for each year are shown in Table 1. The solar radiations are categorized in the low solar radiation and have no potential to generate PV powered UPS system [6]. The maximum and average solar radiation are above  $7000 \text{ Wh/m}^2$  and  $4000 \text{ Wh/m}^2$ , respectively. They are categorized in the very high solar radiation and have big potential to generate PV powered UPS system [7].

Classifications of the daily solar radiation from year 2011 to 2013 are shown in figure. 4. Day number and its percentage of the solar radiation which are lower than 1 kWh/m², between 1 and 3 kWh/m² and higher than 3 kWh/m² in each the year are shown in Table 2.




Fig.4. Distribution of the daily solar radiation for year 2009, 2010 and 2011

Table 2. Day number and its percentage of the solar radiation are lower than 1 kWh/m<sup>2</sup>, between 1 and 3 kWh/m<sup>2</sup> and higher than 3 kWh/m<sup>2</sup> for year 2011 to 2013

| Solar                 |               | 2011              |               | 2012              |               | 2013           |
|-----------------------|---------------|-------------------|---------------|-------------------|---------------|----------------|
| radiation<br>(kWh/m²) | Day<br>number | Percentage<br>(%) | Day<br>number | Percentage<br>(%) | Day<br>number | Percentage (%) |
| lower than 1          | 2             | 0.5               | 3             | 0.8               | 0             | 0              |
| 1 to 3                | 32            | 8.7               | 10            | 2.7               | 8             | 2.1            |
| higher than 3         | 331           | 90.7              | 352           | 96.4              | 357           | 97.8           |

Figure. 4 and Table 2 show that every year, the day number which has no potential (solar radiation is lower than 1 kWh/m²) to gene23 the PV powered UPS system is only below 0.8%. The day number which has still potential (solar radiation is between 1 kWh/m² to 3 kWh/m²) is between 2.1% to 8.7%. The percentage of highest day number which has big potential (solar radiation is higher than 3 kWh/m2) is above 90%, it is indicates that Perlis has big potential to generate the PV powered UPS system.

#### 3. 2 Monthly Solar Radiation

Figure. 5 shows the average monthly solar radiation for the past three years (2011 to 2013). November had the lowest average monthly solar radiation of 4390.14 Wh/m² and the highest of 5549.0 Wh/m² was experienced in February. The average monthly solar radiation for the past three years was 4824.81 Wh/m². The average monthly solar radiation still indicates that the solar radiation in perils is categorized in the very high solar radiation and have big potential to generate PV powered UPS system [7].




Fig.5. Average monthly solar radiation for year 2011, 2012 and 2013




Fig.6. Peak sun hours (PSHs) in Perlis for year 2011, 2012 and 2013

Average peak sun hours (PSHs) for the past three years (2011-20013) are shown in figure. 6. December experienced the lowest PSHs of 4.4 hours and the highest of 5.5 hours was experienced by February. The average PSHs for the past three years was 4.8 hours.

#### 3.3 PV Power Generation Capacity

Based on the average monthly solar radiation for the past three years, the annual total solar radiation in Perlis is  $1761.1~kWh/m^2$ . If this amount of solar radiation is converted to electricity by PV technology with the its efficiency and utilization factor were 13% and 1, respectively, using Equation (1) so will generate a total electricity energy of  $228.9~kWh/m^2$  per year of PV module, provided that the PV modules are horizontally installed.

If all the lands in Perlis ( $795000000~m^2$ ) are filled with horizontal PV panels, nearly 181.97~GWh of electricity can be produced per year. This shows the big potential of solar radiation for PV powered UPS system in Perlis.

#### IV. Conclusion

According to result can be concluded that;

- average monthly solar radiation for the past three years was 4824.81 Wh/m<sup>2</sup>. The average monthly solar radiation indicates that the solar radiation in perils is categorized in the very high solar radiation and have big potential to generate PV powered UPS system.
- The annual total solar radiation in Perlis is 1761.1 kWh/m<sup>2</sup> which will generate a total electric energy of 228.9 kW/m<sup>2</sup> per year of PV module, if all the lands in Perlis were filled with horizontal PV panels, nearly 181.97 GWh of electricity could be produced per year. This shows the big potential of solar radiation for PV powered UPS system in Perlis.

#### References

- References
  2 nur u, Figen B. Assesment of wind power potential for turbine installation in coastal areas of Turkey. Renewable and Sustainable [1] Energy Reviews. 2010; 14: 1901-1912,
- [2] Ahmed O, Hanane D, Roberto S, Abdelaziz M. Monthly and seasonal of wind energy characteristics at four monitored locations 20 guria region (Italy). Renewable and Sustainable Energy Reviews. 2010;14: 1959-1968.
- 12 kvart T. Solar Electricity. John Wiley & Sons, LTD., New York, 1994.
- Jiang F. Investigation of Solar Energy for Photovoltaic Application in Singapore, the 8th International Power Engineering Conference IPEC 2007), 2007;86 89.
- ItagakiA, Okamura H, Yamada M. Preparation of Meteorological Data Set Throughout Japan For Suitable Design of PV Systems.

  World Conference on Photovoltaic Energy Conversion. 2003: 2074 2077. [5]
- Mellit A, Kalogirou S.A, Shaari S, Salhi S, Arab A.H. Methodology for Predictiong Sequences of Mean Monthly Clearness Index and Daily Solar radiation Data in Remote Areas: Application for Sizing a Stand-alone PV System. Renewable Energy, Science 6ct. 2007:1570 – 1590.
- Shijun Y, Hongxing Y 10: Potential Electricity Generating Capacity of BIP In Hong Kong. IEEE Xploree: 1997: 1345 –1348.

  Laleman R, AlbrechJ, Dewulf J. Life Cycle Analysis to Estimate the Environment impact of Residential Photovoltaic Systems in [8] Region with Low Solar Radiation. Renewable and Sustainable Energy Review. 2011; 15: 267 - 281.

#### **ORIGINALITY REPORT**

20% SIMILARITY INDEX

9%
INTERNET SOURCES

15% PUBLICATIONS

IO% STUDENT PAPERS

#### **PRIMARY SOURCES**

- Debashree Debadatta Behera, R.C. Mohanty, A.M. Mohanty. "Development of a Solar Operated Blower for Forging Operation: An Initiative for Sustainable Livelihood of Rural Area", International Journal of Engineering and Advanced Technology, 2020
- B. Ould Bilal, M. Ndongo, C.M.F. Kebe, V. Sambou, P.A. Ndiaye. "Feasibility Study of Wind Energy Potential for Electricity Generation in the Northwestern Coast of Senegal", Energy Procedia, 2013

  Publication
- M. P. Kassim, M. P. Abdullah, M. Y. Hassan, F. Hussin. "Comparison between predicted and measured generation output of a photovoltaic farm", 2014 IEEE Conference on Energy Conversion (CENCON), 2014

  Publication
  - lahore.comsats.edu.pk
    Internet Source

1 %

1 %

1 %

| 5  | Submitted to Samuel Merritt University  Student Paper   | 1 % |
|----|---|-----|
| 6  | Mohamed Almaktar, Hasimah Abdul Rahman,<br>Mohammad Yusri Hassan, Ibrahim Saeh.<br>"Artificial neural network-based photovoltaic<br>module temperature estimation for tropical<br>climate of Malaysia and its impact on<br>photovoltaic system energy yield", Progress in<br>Photovoltaics: Research and Applications,<br>2015<br>Publication | 1%  |
| 7  | data.landportal.info Internet Source  | 1 % |
| 8  | docplayer.net Internet Source   | 1 % |
| 9  | Submitted to BPP College of Professional Studies Limited Student Paper  | 1%  |
| 10 | N. J. Mohr. "Environmental life cycle assessment of roof-integrated flexible amorphous silicon/nanocrystalline silicon solar cell laminate: Environmental life cycle assessment", Progress in Photovoltaics Research and Applications, 04/2012  | 1 % |
| 11 | Masri, Mahrizal, R. Badlisha, Muhamad<br>Irwanto, N. Gomesh, Y.M. Irwan, F. Malek,  | 1 % |

Hermansyah Alam, and M.R. Mamat. "Effect of Maximum Voltage Angle on Inverter Performance Applied in Uninterrupted Power Supply (UPS)", Applied Mechanics and Materials, 2015.

Publication

| 12 | Tao, Jacqueline Yujia, and Anton Finenko. "Moving beyond LCOE: impact of various financing methods on PV profitability for SIDS", Energy Policy, 2016. Publication          | 1 % |
|----|---|-----|
| 13 | eudl.eu<br>Internet Source  | 1 % |
| 14 | S. Morelli, M. Stortini. "Direct and total irradiance: Measurement, calculation and comparison with Lowtran 6 and Lowtran 7 predictions", Il Nuovo Cimento C, 1992          | 1 % |
| 15 | jatit.org<br>Internet Source  | 1 % |
| 16 | studentsrepo.um.edu.my Internet Source  | 1 % |
| 17 | Jianying Hu, Xiong (Bill) Yu. "Adaptive building roof by coupling thermochromic material and phase change material: Energy performance under different climate conditions", | 1 % |

Construction and Building Materials, 2020

Publication

| 18 | Submitted to The University of Manchester Student Paper   | <1%          |
|----|---|--------------|
| 19 | Shukla, Akash Kumar, K. Sudhakar, and Prashant Baredar. "Design, simulation and economic analysis of standalone roof top solar PV system in India", Solar Energy, 2016. Publication | <1%          |
| 20 | archive.org Internet Source   | <1%          |
| 21 | Etienne Hemelrijck. "The solar radiation incident at the top of the atmospheres of Uranus and Neptune", Earth Moon and Planets, 02/1988 Publication                                 | <1%          |
|    |   |              |
| 22 | www.intechopen.com Internet Source  | <1%          |
| 23 |   | <1 %<br><1 % |

# under different climate conditions", Solar Energy, 2019

**Publication** 

Sari Farah Dina, Himsar Ambarita, Farel H. <1% 25 Napitupulu, Hideki Kawai. "Study on effectiveness of continuous solar dryer integrated with desiccant thermal storage for drying cocoa beans", Case Studies in Thermal Engineering, 2015 **Publication** <1% www.osti.gov Internet Source <1% "Sustainable Energy Development and Innovation", Springer Science and Business Media LLC, 2022 **Publication** Moreno, D.A.. "Sulfur, chromium, and <1% 28 selenium accumulated in Chinese cabbage under direct covers", Journal of Environmental Management, 200501 Publication S. Weixiang, A.S.K. Bin, O.K. Seng. "A study on <1% 29 standalone photovoltaic system with real meteorological data at Malaysia", 2005 International Conference on Electrical Machines and Systems, 2005 Publication

Exclude quotes Off Exclude matches Off

Exclude bibliography Off