

SECTION 1

Couplings



- Cam & Groove Couplings
- Storz Din Couplings
- IBC Off Load Couplings
- Mortar Hose Couplings
- Trench Pump Couplings
- Tanker Couplings
- Fire Hose Couplings
- Lever Lock Couplings
- Claw Couplings
- Shot Blast Couplings
- Steam Couplings



SECTION 1 CONTENTS

A-Z

Cam & Groove Quick Couplings	980-984
Claw Couplings & Accessories	1005-1011
Dallai Lever Lock Couplings	995-1002
Fire Hose Couplings	994
Hose Joiners	993
IBC Couplings	987
Jaymac Claw Couplings	1008-1011
Jaymac Lever Lock Couplings	1003-1004
Lever Lock Couplings	995-1004
Ludecke Claw Couplings	1005-1007
Mortar Hose Couplings	988

Shot Blast Couplings	1013-1014
Shot Blast Nozzle Holders	1014
Standpipes	1012
Steam Couplings & Clamps	1015-1016
Steam Hoses	1016
Storz Din Couplings	985-986
Tanker Couplings	992
Trench Pump Hose Couplings	989-991
Unicone Fittings	1014
Water Hose Couplings	1010


Cam & Groove Quick Couplings



Aluminium



Stainless Steel



Brass



Polypropylene



See page 984 for spare seals.

Aluminium Couplings

Couplings

A

Female Threaded Plug, BSPP



0060	Thread
A12-AU	1/2"
A34-AU	3/4"
A1-AU	1"
A114-AU	1.1/4"
A112-AU	1.1/2"
A2-AU	2"
A212-AU	2.1/2"
A3-AU	3"
A4-AU	4"
A6-AU	6"
Tech Sheet 532	

Female Threaded Plug, NPT

0060	Thread
A12-AU-NPT	1/2"
A34-AU-NPT	3/4"
A1-AU-NPT	1"
A114-AU-NPT	1.1/4"
A112-AU-NPT	1.1/2"
A2-AU-NPT	2"
A212-AU-NPT	2.1/2"
A3-AU-NPT	3"
A4-AU-NPT	4"
Tech Sheet 532	

B

Male Threaded Lever Coupling, BSPT



0060	Thread
B12-AU	1/2"
B34-AU	3/4"
B1-AU	1"
B114-AU	1.1/4"
B112-AU	1.1/2"
B2-AU	2"
B212-AU	2.1/2"
B3-AU	3"
B4-AU	4"
Tech Sheet 532	

Male Threaded Lever Coupling, NPT

0060	Thread
B34-AU-NPT	3/4"
B1-AU-NPT	1"
B114-AU-NPT	1.1/4"
B112-AU-NPT	1.1/2"
B2-AU-NPT	2"
B212-AU-NPT	2.1/2"
B3-AU-NPT	3"
B4-AU-NPT	4"
Tech Sheet 532	

C

Hose Tail Lever Coupling



0060	Body
C12-AU	1/2"
C34-AU	3/4"
C1-AU	1"
C114-AU	1.1/4"
C112-AU	1.1/2"
C2-AU	2"
C212-AU	2.1/2"
C3-AU	3"
C4-AU	4"
C6-AU	6"
Tech Sheet 532	

D

Female Lever Coupling, BSPP



0060	Thread
D12-AU	1/2"
D34-AU	3/4"
D1-AU	1"
D114-AU	1.1/4"
D112-AU	1.1/2"
D2-AU	2"
D212-AU	2.1/2"
D3-AU	3"
D4-AU	4"
D6-AU	6"
Tech Sheet 532	

Female Lever Coupling, NPT

0060	Thread
D12-AU-NPT	1/2"
D34-AU-NPT	3/4"
D1-AU-NPT	1"
D114-AU-NPT	1.1/4"
D112-AU-NPT	1.1/2"
D2-AU-NPT	2"
D212-AU-NPT	2.1/2"
D3-AU-NPT	3"
D4-AU-NPT	4"
D6-AU-NPT	6"
Tech Sheet 532	

Dust Plug



0060	Body
DP12-AU	1/2"
DP34-AU	3/4"
DP1-AU	1"
DP114-AU	1.1/4"
DP112-AU	1.1/2"
DP2-AU	2"
DP212-AU	2.1/2"
DP3-AU	3"
DP4-AU	4"
DP6-AU	6"
Tech Sheet 532	

Lever Stop



0060	Body
DC12-AU	1/2"
DC34-AU	3/4"
DC1-AU	1"
DC114-AU	1.1/4"
DC112-AU	1.1/2"
DC2-AU	2"
DC212-AU	2.1/2"
DC3-AU	3"
DC4-AU	4"
DC6-AU	6"
Tech Sheet 532	

E

Hose Tail



0060	Body
E12-AU	1/2"
E34-AU	3/4"
E1-AU	1"
E114-AU	1.1/4"
E112-AU	1.1/2"
E2-AU	2"
E212-AU	2.1/2"
E3-AU	3"
E4-AU	4"
E6-AU	6"
Tech Sheet 532	

F

Male Threaded Plug, BSPT



0060	Thread
F12-AU	1/2"
F34-AU	3/4"
F1-AU	1"
F114-AU	1.1/4"
F112-AU	1.1/2"
F2-AU	2"
F212-AU	2.1/2"
F3-AU	3"
F4-AU	4"
F6-AU	6"
Tech Sheet 532	

Male Threaded Plug, NPT

0060	Thread
F12-AU-NPT	1/2"
F34-AU-NPT	3/4"
F1-AU-NPT	1"
F114-AU-NPT	1.1/4"
F112-AU-NPT	1.1/2"
F2-AU-NPT	2"
F212-AU-NPT	2.1/2"
F3-AU-NPT	3"
F4-AU-NPT	4"
F6-AU-NPT	6"
Tech Sheet 532	

CAM & GROOVE QUICK COUPLINGS

stainless
steel

JAYMAC
Industrial Hose & Accessories

1



316 Stainless Steel Couplings

See page 984 for spare seals.

A

Female Threaded Plug, BSPP

0060	Thread
A12-SS	1/2"
A34-SS	3/4"
A1-SS	1"
A114-SS	1.1/4"
A112-SS	1.1/2"
A2-SS	2"
A212-SS	2.1/2"
A3-SS	3"
A4-SS	4"
A6-SS	6"
Tech Sheet 532	



Female Threaded Plug, NPT

0060	Thread
A12-SS-NPT	1/2"
A34-SS-NPT	3/4"
A1-SS-NPT	1"
A114-SS-NPT	1.1/4"
A112-SS-NPT	1.1/2"
A2-SS-NPT	2"
A212-SS-NPT	2.1/2"
A3-SS-NPT	3"
A4-SS-NPT	4"
Tech Sheet 532	



B

Male Threaded Lever Coupling, BSPT

0060	Thread
B12-SS	1/2"
B34-SS	3/4"
B1-SS	1"
B114-SS	1.1/4"
B112-SS	1.1/2"
B2-SS	2"
B212-SS	2.1/2"
B3-SS	3"
B4-SS	4"
Tech Sheet 532	

Male Threaded Lever Coupling, NPT

0060	Thread
B12-SS-NPT	1/2"
B34-SS-NPT	3/4"
B1-SS-NPT	1"
B114-SS-NPT	1.1/4"
B112-SS-NPT	1.1/2"
B2-SS-NPT	2"
B3-SS-NPT	3"
B4-SS-NPT	4"
Tech Sheet 532	



C

Hose Tail Lever Coupling

0060	Body
C12-SS	1/2"
C34-SS	3/4"
C1-SS	1"
C114-SS	1.1/4"
C112-SS	1.1/2"
C2-SS	2"
C212-SS	2.1/2"
C3-SS	3"
C4-SS	4"
Tech Sheet 532	



D

Female Lever Coupling, BSPP

0060	Thread
D12-SS	1/2"
D34-SS	3/4"
D1-SS	1"
D114-SS	1.1/4"
D112-SS	1.1/2"
D2-SS	2"
D212-SS	2.1/2"
D3-SS	3"
D4-SS	4"
Tech Sheet 532	



Female Lever Coupling, NPT

0060	Thread
D12-SS-NPT	1/2"
D34-SS-NPT	3/4"
D1-SS-NPT	1"
D114-SS-NPT	1.1/4"
D112-SS-NPT	1.1/2"
D2-SS-NPT	2"
D212-SS-NPT	2.1/2"
D3-SS-NPT	3"
D4-SS-NPT	4"
Tech Sheet 532	

Dust Plug

0060	Body
DP12-SS	1/2"
DP34-SS	3/4"
DP1-SS	1"
DP112-SS	1.1/2"
DP2-SS	2"
DP212-SS	2.1/2"
DP3-SS	3"
Tech Sheet 532	



Lever Stop

0060	Body
DC34-SS	3/4"
DC1-SS	1"
DC114-SS	1.1/4"
DC112-SS	1.1/2"
DC2-SS	2"
DC3-SS	3"
DC4-SS	4"
Tech Sheet 532	



E

Hose Tail

0060	Thread
E12-SS	1/2"
E34-SS	3/4"
E1-SS	1"
E114-SS	1.1/4"
E112-SS	1.1/2"
E2-SS	2"
E212-SS	2.1/2"
E3-SS	3"
E4-SS	4"
Tech Sheet 532	



F

Male Threaded Plug, BSPT

0060	Thread
F12-SS	1/2"
F34-SS	3/4"
F1-SS	1"
F114-SS	1.1/4"
F112-SS	1.1/2"
F2-SS	2"
F212-SS	2.1/2"
F3-SS	3"
F4-SS	4"
Tech Sheet 532	



Male Threaded Plug, NPT

0060	Body
F12-SS-NPT	1/2"
F34-SS-NPT	3/4"
F1-SS-NPT	1"
F114-SS-NPT	1.1/4"
F112-SS-NPT	1.1/2"
F2-SS-NPT	2"
F212-SS-NPT	2.1/2"
F3-SS-NPT	3"
F4-SS-NPT	4"
Tech Sheet 532	

Couplings



INDUSTRIAL

N.B. 1/2" sizes are only supplied with one locking arm.

See page 984 for spare seals.

**A****Female Threaded Plug, BSPP**

0060	Thread
A12-PP	1/2"
A34-PP	3/4"
A1-PP	1"
A114-PP	1.1/4"
A112-PP	1.1/2"
A2-PP	2"
A3-PP	3"
A4-PP	4"
Tech Sheet 532	

Female Threaded Plug, NPT

0060	Thread
A12/34-PP-NPT	1/2"
A34-PP-NPT	3/4"
A1-PP-NPT	1"
A114-PP-NPT	1.1/4"
A112-PP-NPT	1.1/2"
A2-PP-NPT	2"
A3-PP-NPT	3"
A4-PP-NPT	4"
Tech Sheet 532	

**B****Male Threaded Lever Coupling, BSPP**

0060	Thread
B12-PP	1/2"
B34-PP	3/4"
B1-PP	1"
B114-PP	1.1/4"
B112-PP	1.1/2"
B2-PP	2"
B3-PP	3"
Tech Sheet 532	

Male Threaded Lever Coupling, NPT

0060	Thread
B12/34-PP-NPT	1/2"
B34-PP-NPT	3/4"
B1-PP-NPT	1"
B114-PP-NPT	1.1/4"
B112-PP-NPT	1.1/2"
B2-PP-NPT	2"
B3-PP-NPT	3"
B4-PP-NPT	4"
Tech Sheet 532	

**C****Hose Tail Lever Coupling**

0060	Body
C12-PP	1/2"
C34-PP	3/4"
C1-PP	1"
C114-PP	1.1/4"
C112-PP	1.1/2"
C2-PP	2"
C3-PP	3"
C4-PP	4"
Tech Sheet 532	

**D****Female Lever Coupling, BSPP**

0060	Thread
D12-PP	1/2"
D34-PP	3/4"
D1-PP	1"
D114-PP	1.1/4"
D112-PP	1.1/2"
D2-PP	2"
D3-PP	3"
D4-PP	4"
Tech Sheet 532	

Female Lever Coupling, NPT

0060	Thread
D12/34-PP-NPT	1/2"
D34-PP-NPT	3/4"
D1-PP-NPT	1"
D114-PP-NPT	1.1/4"
D112-PP-NPT	1.1/2"
D2-PP-NPT	2"
D3-PP-NPT	3"
D4-PP-NPT	4"
Tech Sheet 532	

**Dust Plug**

0060	Body
DP34-PP	3/4"
DP1-PP	1"
DP114-PP	1.1/4"
DP112-PP	1.1/2"
DP2-PP	2"
DP3-PP	3"
Tech Sheet 532	

**Lever Stop**

0060	Body
DC34-PP	3/4"
DC1-PP	1"
DC114-PP	1.1/4"
DC112-PP	1.1/2"
DC2-PP	2"
DC3-PP	3"
Tech Sheet 532	

**E****Hose Tail**

0060	Body
E12-PP	1/2"
E34-PP	3/4"
E1-PP	1"
E114-PP	1.1/4"
E112-PP	1.1/2"
E2-PP	2"
E3-PP	3"
E4-PP	4"
Tech Sheet 532	

**F****Male Threaded Plug, BSPP**

0060	Thread
F12-PP	1/2"
F34-PP	3/4"
F1-PP	1"
F114-PP	1.1/4"
F112-PP	1.1/2"
F2-PP	2"
F3-PP	3"
F4-PP	4"
Tech Sheet 532	

Male Threaded Plug, NPT

0060	Thread
F12/34-PP-NPT	1/2"
F34-PP-NPT	3/4"
F1-PP-NPT	1"
F112-PP-NPT	1.1/2"
F2-PP-NPT	2"
F3-PP-NPT	3"
F4-PP-NPT	4"
Tech Sheet 532	

Please note: 1/2" sizes are only supplied with one locking arm.



CAM & GROOVE QUICK COUPLINGS

Brass Couplings

See page 984 for spare seals.

A

Female Threaded Plug, BSPP



0060	Thread
A12-BR	1/2"
A34-BR	3/4"
A1-BR	1"
A114-BR	1.1/4"
A112-BR	1.1/2"
A2-BR	2"
A212-BR	2.1/2"
A3-BR	3"
A4-BR	4"

Tech Sheet 532

Female Threaded Plug, NPT

0060	Thread
A12-BR-NPT	1/2"
A34-BR-NPT	3/4"
A1-BR-NPT	1"
A112-BR-NPT	1.1/2"
A2-BR-NPT	2"
A212-BR-NPT	2.1/2"
A3-BR-NPT	3"
A4-BR-NPT	4"
A5-BR-NPT	5"
A6-BR-NPT	6"

Tech Sheet 532

B

Male Threaded Lever Coupling, BSPT



0060	Thread
B12-BR	1/2"
B34-BR	3/4"
B1-BR	1"
B114-BR	1.1/4"
B112-BR	1.1/2"
B2-BR	2"
B212-BR	2.1/2"
B3-BR	3"
B4-BR	4"

Tech Sheet 532

Male Threaded Lever Coupling, NPT

0060	Thread
B12-BR-NPT	1/2"
B34-BR-NPT	3/4"
B1-BR-NPT	1"
B114-BR-NPT	1.1/4"
B112-BR-NPT	1.1/2"
B2-BR-NPT	2"
B212-BR-NPT	2.1/2"
B3-BR-NPT	3"
B4-BR-NPT	4"
B6-BR-NPT	6"

Tech Sheet 532

C

Hose Tail Lever Coupling



0060	Body
C12-BR	1/2"
C34-BR	3/4"
C1-BR	1"
C114-BR	1.1/4"
C112-BR	1.1/2"
C2-BR	2"
C212-BR	2.1/2"
C3-BR	3"
C4-BR	4"

Tech Sheet 532

D

Female Lever Coupling, BSPP



0060	Thread
D12-BR	1/2"
D34-BR	3/4"
D1-BR	1"
D114-BR	1.1/4"
D112-BR	1.1/2"
D2-BR	2"
D212-BR	2.1/2"
D3-BR	3"
D4-BR	4"

Tech Sheet 532

Female Lever Coupling, NPT

0060	Thread
D12-BR-NPT	1/2"
D34-BR-NPT	3/4"
D1-BR-NPT	1"
D114-BR-NPT	1.1/4"
D112-BR-NPT	1.1/2"
D2-BR-NPT	2"
D212-BR-NPT	2.1/2"
D3-BR-NPT	3"
D4-BR-NPT	4"
D5-BR-NPT	5"
D6-BR-NPT	6"

Tech Sheet 532

Dust Plug



0060	Body
DP12-BR	1/2"
DP1-BR	1"
DP114-BR	1.1/4"
DP112-BR	1.1/2"
DP2-BR	2"
DP212-BR	2.1/2"
DP3-BR	3"
DP4-BR	4"
DP6-BR	6"

Tech Sheet 532

Lever Stop



0060	Body
DC12-BR	1/2"
DC1-BR	1"
DC112-BR	1.1/2"
DC2-BR	2"
DC212-BR	2.1/2"
DC3-BR	3"
DC6-BR	6"

Tech Sheet 532

E

Hose Tail



0060	Body
E12-BR	1/2"
E34-BR	3/4"
E1-BR	1"
E114-BR	1.1/4"
E112-BR	1.1/2"
E2-BR	2"
E212-BR	2.1/2"
E3-BR	3"
E4-BR	4"

Tech Sheet 532

F

Male Threaded Plug, BSPT



0060	Thread
F12-BR	1/2"
F34-BR	3/4"
F1-BR	1"
F114-BR	1.1/4"
F112-BR	1.1/2"
F2-BR	2"
F212-BR	2.1/2"
F3-BR	3"
F4-BR	4"
F6-BR	6"

Tech Sheet 532

Male Threaded Plug, NPT

0060	Thread
F12-BR-NPT	1/2"
F1-BR-NPT	1"
F114-BR-NPT	1.1/4"
F112-BR-NPT	1.1/2"
F2-BR-NPT	2"
F212-BR-NPT	2.1/2"
F3-BR-NPT	3"
F4-BR-NPT	4"

Tech Sheet 532

Please note: 1/2" sizes are only supplied with one locking arm.

CAM & GROOVE SEALS & SPARES

Brass Couplings

Same as original C series, but with extended tail.



Extended Hose Tail Lever Coupling

0060	Body	Length mm
CO-C2-BR	2"	138
CO-C3-BR	3"	164
CO-C4-BR	4"	175

Tech Sheet 532

Same as original E series, but with extended tail.



Extended Hose Tail

0060	Body	Length mm
CO-E2-BR	2"	140
CO-E3-BR	3"	170
CO-E4-BR	4"	182

Tech Sheet 532

You might also need...



10 bar Water Suction Hose
see Industrial Section 6

Cam & Groove Seals

Seals suitable for cam and groove quick couplings.



Viton Seals

0060	To Suit Coupling Size
VITON-12	1/2"
VITON-34	3/4"
VITON-1	1"
VITON-114	1.1/4"
VITON-112	1.1/2"
VITON-2	2"
VITON-212	2.1/2"
VITON-3	3"

EPDM Seals

0060	To Suit Coupling Size
EPDM-12	1/2"
EPDM-34	3/4"
EPDM-1	1"
EPDM-114	1.1/4"
EPDM-112	1.1/2"
EPDM-2	2"
EPDM-212	2.1/2"
EPDM-3	3"
EPDM-4	4"

Buna Seals

0060	To Suit Coupling Size
BUNA-12	1/2"
BUNA-34	3/4"
BUNA-1	1"
BUNA-114	1.1/4"
BUNA-112	1.1/2"
BUNA-2	2"
BUNA-212	2.1/2"
BUNA-3	3"
BUNA-4	4"
BUNA-6	6"

Tech Sheet 20356

PTFE Seals



0060	To Suit Coupling Size
PTFE-12	1/2"
PTFE-34	3/4"
PTFE-1	1"
PTFE-114	1.1/4"
PTFE-112	1.1/2"
PTFE-2	2"
PTFE-212	2.1/2"
PTFE-3	3"

Stainless Arm, Pin & Ring



Spare Arm, Pin & Ring for Cam & Groove Couplings

0060	To Suit Coupling Size
CGS-12-34	1/2" & 3/4"
CGS-1	1"
CGS-114-212	1.1/4" & 2.1/2"
CGS-3-4	3" & 4"

Chain & Ring for Cam Lock Caps



0060	Description
BRC6	6" Brass
SSC6	6" Stainless Steel
BRC12	12" Brass
SSC12	12" Stainless Steel



STORZ DIN SUCTION COUPLINGS

Adaptors



Female, BSPP, Aluminium

0148	Storz Size	Thread	Ka
SZ-21-031050-10	25-D	1/2"	31
SZ-21-031075-10	25-D	3/4"	31
SZ-21-031100-10	25-D	1"	31
SZ-21-044100-10	32	1"	44
SZ-21-044125-10	32	1.1/4"	44
SZ-21-051150-10	38	1.1/2"	51
SZ-21-051200-10	38	2"	51
SZ-21-066100-15	52-C	1"	66
SZ-21-066150-15	52-C	1.1/2"	66
SZ-21-066200-15	52-C DIN 14 307	2"	66
SZ-21-066250-15	52-C	2.1/2"	66
SZ-21-081200-10	65	2"	81
SZ-21-081250-10	65	2.1/2"	81
SZ-21-089200-15	75-B	2"	89
SZ-21-089250-15	75-B DIN 14 308	2.1/2"	89
SZ-21-089300-15	75-B	3"	89
SZ-21-105300-10	90	3"	105
SZ-21-115400-10	100	4"	115
SZ-21-133400-10	110-A	4"	133
SZ-21-133450-10	110-A DIN 14 309	4.1/2"	133
SZ-21-220800-10	205	8"	220
Tech Sheet 60474			



Female, BSPP, Copper Alloy (Brass)

0148	Storz Size	Thread	Ka
SZ-21-031100-30	25-D	1"	31
SZ-21-051200-30	38	2"	51
SZ-21-066200-35	52-C DIN 86 204	2"	66
SZ-21-066250-30	52-C	2.1/2"	66
SZ-21-081200-30	65	2"	81
Tech Sheet 60474			



Female with Safety Latch, Aluminium

0148	Storz Size	Thread	Ka
SZ-27-066200-10	52-C	2"	66
SZ-27-089300-10	75-B	3"	89
SZ-27-133400-10	110-A	4"	133
SZ-27-148500-10	125	5"	148
SZ-27-160600-10	150	6"	160
Tech Sheet 60474			



Male, BSPP, Copper Alloy (Brass)

0148	Storz Size	Thread	Ka
SZ-22-066200-30	52-C	2"	66
Tech Sheet 60475			



Male, BSPP, Aluminium

0148	Storz Size	Thread	Ka
SZ-22-031100-10	25-D	1"	31
SZ-22-044100-10	32	1"	44
SZ-22-051150-10	38	1.1/2"	51
SZ-22-066125-15	52-C	1.1/4"	66
SZ-22-066150-15	52-C	1.1/2"	66
SZ-22-066200-15	52-C	2"	66
SZ-22-081250-10	65	2.1/2"	81
SZ-22-089250-15	75-B	2.1/2"	89
SZ-22-089300-15	75-B	3"	89
SZ-22-133400-10	110-A	4"	133
Tech Sheet 60475			

Hose Tails



Aluminium

0148	Storz Size	To Suit Hose ID	Ka	Length mm
SZ-12-031025-10	25-D	25	31	53
SZ-12-044019-10	32	19	44	70
SZ-12-044025-10	32	25	44	70
SZ-12-044032-10	32	32	44	70
SZ-12-051038-10	38	38	51	90
SZ-12-066025-10	52-C	25	66	90
SZ-12-066032-10	52-C	32	66	90
SZ-12-066045-10	52-C	45	66	90
SZ-12-066052-10	52-C	52	66	90
SZ-12-066060-10	52-C	60	66	90
SZ-12-081065-10	65	65	81	95
SZ-12-089065-10	75-B	65	89	125
SZ-12-089070-10	75-B	70	89	125
SZ-12-089075-10	75-B	75	89	125
SZ-12-089080-10	75-B	80	89	125
SZ-12-105090-10	90	90	105	160
SZ-12-115100-10	100	100	115	150
SZ-12-133100-10	110-A	100	133	170
SZ-12-133110-10	110-A	110	133	170
SZ-12-160150-10	150	150	160	180
SZ-12-220205-10	205	205	220	375
Tech Sheet 60465				



Copper Alloy (Brass)

0148	Storz Size	To Suit Hose ID mm	Ka	Length mm
SZ-12-031025-30	25-D	25	31	25
SZ-12-066025-30	52-C	25	66	90
SZ-12-066045-30	52-C	45	66	90
SZ-12-066052-30	52-C	52	66	90
Tech Sheet 60473				



Aluminium, Smooth, DIN 2817

0148	Storz Size	To Suit Hose ID mm	Ka	Length mm
SZ-13-166050-10	52-C	50	66	95
SZ-13-089075-10	75-B	75	89	105
Tech Sheet 60473				

Couplings with Safety Latch



Aluminium

0148	Storz Size	To Suit Hose ID mm	Ka	Length mm
SZ-12-066045-19	52-C	45	66	90
SZ-12-066052-19	52-C DIN 14 321	52	66	90
SZ-12-081065-19	65	65	81	95
SZ-12-089065-19	75-B	65	89	125
SZ-12-089075-19	75-B DIN 14 322	75	89	125
SZ-12-115100-19	100	100	115	150
SZ-12-160150-19	150	150	160	180
Tech Sheet 60466				

STORZ DIN SUCTION COUPLINGS



Safety Clamps DIN 2817



Aluminium

0148	Size
SZ-13-800050-10	50 x 8
SZ-13-800075-10	75 x 8
SZ-13-800100-10	100 x 8
Tech Sheet 60467	

Reducers



Aluminium

0148	Storz Size	Ka	Ka
SZ-35-066044-10	52-C/32	66	44
SZ-35-081066-10	65/52-C	81	66
SZ-35-115089-10	100/75-B	115	89
SZ-35-160133-10	150/110-A	160	133
Tech Sheet 60468			

Blank Caps



With Chains, Aluminium

0148	Storz Size	Ka
SZ-31-031000-10	25-D DIN 14 310	31
SZ-31-044000-10	32	44
SZ-31-051000-10	38	51
SZ-31-066000-10	52-C DIN 14 311	66
SZ-31-081000-10	65	81
SZ-31-089000-10	75-B DIN 14 312	89
SZ-31-105000-10	90	105
SZ-31-115000-10	100	115
SZ-31-133000-10	110-A DIN 14 313	133
SZ-31-148000-10	125	148
SZ-31-160000-10	150	160
Tech Sheet 60469		

With Chains, Copper Alloy (Brass)

0148	Storz Size	Ka
SZ-31-031000-30	25-D	31
SZ-31-066000-30	52-C	66
Tech Sheet 60469		



With Lock, Aluminium

0148	Storz Size	Ka
SZ-31-500089-10	75-B	89
SZ-31-500133-10	110-A	133
Tech Sheet 60470		

Seals



Nitrile, Silicone & Viton

0148	Storz Size	Ka	Material
SZ-91-002031-00	25-D	31	Nitrile
SZ-91-002044-00	32	44	Nitrile
SZ-91-002051-00	38	51	Nitrile
SZ-91-002066-00	52-C	66	Nitrile
SZ-91-002081-00	65	81	Nitrile
SZ-91-002089-00	75-B	89	Nitrile
SZ-91-002133-00	110-A	133	Nitrile
SZ-91-002148-00	125	148	Nitrile
SZ-91-002160-00	150	160	Nitrile
SZ-91-002220-00	205	220	Nitrile
SZ-91-002031-02	25-D	31	Silicone
SZ-91-002044-02	32	44	Silicone
SZ-91-002051-02	38	51	Silicone
SZ-91-002066-02	52-C	66	Silicone
SZ-91-002081-02	65	81	Silicone
SZ-91-002089-02	75-B	89	Silicone
SZ-91-002115-02	100	115	Silicone
SZ-91-002133-02	110-A	133	Silicone
SZ-91-002066-03	52-C	66	Viton
Tech Sheet 60471			

Storz Coupling Spanners

- Size D shown



0148	Description
SZ-71-031031-50	Steel Spanner Size D
SZ-71-081051-50	Steel Spanner Size 65/38
SZ-71-089066-20	Cast Iron Spanner Size B C
SZ-71-133066-20	Cast Iron Spanner Size A B C
Tech Sheet 60472	



IBC OFF LOAD SYSTEM

IBC Off Load System



Cam Male Adaptor x Female Thread - Part A

0108	Size	Thread
IBCAS6062	2"	S60 x 6
IBCAS606112	1.1/2"	S60 x 6
IBCAS6061	1"	S60 x 6
IBCA2NPS	2"	NPSM
IBCAS10083	3"	S100 x 8



Fixed Male Thread x Female Thread - Part HA

0108	Male Thread	Female Thread
IBCHAS6062BSP	2" BSPP	S60 x 6
IBCHAS606112BSP	1.1/2" BSPP	S60 x 6
IBCHAS6061BSP	1" BSPP	S60 x 6
IBCHAS60X34BSP	3/4" BSPP	S60 x 6
IBCHAS6062NPS	2" NPSM	S60 x 6
IBCHAS10083	3" BSPP	S100 x 8
IBCHAS606S1008	S60 x 6	S100 x 8
IBCHAS606NPSM2	S60 x 6	2" NPSM
IBCHAS6062BSPCWS	S60 x 6	2" BSPP with Seal



Cam Female Coupler x Hose Tail - Part C

0108	Size	To Suit Hose ID
IBCC21	2"	1" (25mm)
IBCC2114	2"	1.1/4" (32mm)
IBCC2112	2"	1.1/2" (38mm)
IBCC22	2"	2" (50mm)
IBCC33	3"	3" (75mm)



Female Coupler x Female Thread - Part D

0108	Size	Thread
IBCD112112BSP	1.1/2"	1.1/2" BSPP
IBCD22BSP	2"	2" BSPP
IBCD6062	2"	S60 x 6



Swivel Hose Tail x Female Thread - Part HC

0108	To Suit Hose ID	Thread
IBCHCS6061	1" (25mm)	S60 x 6
IBCHCS606114	1.1/4" (32mm)	S60 x 6
IBCHCS606112	1.1/2" (38mm)	S60 x 6
IBCHCS6062	2" (50mm)	S60 x 6



Female Thread x Female Thread - Part HD

0108	Size
IBCHDS6062BSP	2" BSPP x S60 x 6
IBCHDS606112BSP	1.1/2" BSPP x S60 x 6
IBCHDS6062NPS	2" NPSM x S60 x 6



Dust Plug

0108	Size
IBCDP112	1.1/2"
IBCDP2	2"



Dust Cap

0108	Size
IBCDC112	1.1/2"
IBCDC2	2"
IBCDC3	3"



EPDM, Seal to suit S60 x 6 Thread

0108
IBC-SEAL

MORTAR HOSE COUPLINGS & PLUGS

Lever Couplings



Male Threaded, BSPP

0108	Size	Thread
MAG 10/25	25	1"
MAG 20/50	50	2"
Tech Sheet 20469		



Female Threaded, BSPP

0108	Size	Thread
MIG 10/25	25	1"
MIG 15/35	35	1.1/2"
MIG 20/50	50	2"
Tech Sheet 20469		



Hose Tail, BSPP

0108	Size	To Suit Hose ID mm
MST 38/35	35	38
MST 50	50	50
Tech Sheet 20469		

Plugs



Male Threaded, BSPP

0108	Size	Thread
VAG 10/25	25	1"
VAG 20/50	50	2"
Tech Sheet 20469		



Female Threaded, BSPP

0108	Size	Thread
VIG 10/25	25	1"
VIG 15/35	35	1.1/2"
VIG 20/50	50	2"
Tech Sheet 20469		



Hose Tail

0108	Size	To Suit Hose ID mm
VST 38/35	35	38
VST 50	50	50
Tech Sheet 20469		

FLANGES

Mild Steel Flanged Hose Tails

Table E, Mild Steel

0108	To Suit Hose ID
FEHT2	2"
FEHT3	3"
FEHT4	4"
Tech Sheet 20469	

NP16, Mild Steel

0108	To Suit Hose ID
FNP16HT112	1.1/2"
FNP16HT2	2"
FNP16HT212	2.1/2"
FNP16HT3	3"
FNP16HT4	4"
FNP16HT6	6"
FNP16HT8	8"
Tech Sheet 20469	



Flanged Hose Tail Table D, Mild Steel

0108	To Suit Hose ID
FDHT2	2"
FDHT3	3"
FDHT4	4"
FDHT5	5"
FDHT6	6"
Tech Sheet 20469	

ASA150, Mild Steel

0108	To Suit Hose ID
FASA150HT2	2"
Tech Sheet 20469	

Stainless Steel Flanged Hose Tails

stainless steel

Table E, Stainless Steel

0108	To Suit Hose ID
FHSESS2	2"
Tech Sheet 20469	

stainless steel

NP16, Stainless Steel

0108	To Suit Hose ID
FHSNP16SS2	2"
FHSNP16SS3	3"
Tech Sheet 20469	

stainless steel

ASA 150, Stainless Steel

0108	To Suit Hose ID
FHSASASS2	2"
Tech Sheet 20469	



TRENCH PUMP HOSE COUPLINGS - LUG TYPE

Male BSPP



Malleable Iron, BSPP

0108	Thread
MIMT112	1.1/2"
MIMT2	2"
MIMT212	2.1/2"
MIMT3	3"
MIMT4	4"

Tech Sheet 20399



Alloy, BSPP

0108	Thread
AMT112	1.1/2"
AMT2	2"
AMT212	2.1/2"
AMT3BSP	3"
AMT4BSP	4"

Tech Sheet 20399



Polypropylene, BSPP

0108	Thread
PMT112	1.1/2"
PMT2	2"
PMT212	2.1/2"
PMT3BSP	3"
PMT4BSP	4"

Tech Sheet 20399

Male URT



Alloy, URT

0108	Thread
AMT3URT	3"
AMT4URT	4"

Tech Sheet 20397

Female BSPP

- Leather washer included



Malleable Iron, BSPP

0108	Thread	To Suit Hose ID
MICT112	1.1/2"	1.1/2"
MICT2	2"	2"
MICT212	2.1/2"	2.1/2"
MICT3	3"	3"
MICT4	4"	4"

Tech Sheet 20398



Polypropylene, BSPP

0108	Thread	To Suit Hose ID
PCT112	1.1/2"	1.1/2"
PCT2	2"	2"
PCT212	2.1/2"	2.1/2"
PCT3BSP	3"	3"
PCT4BSP	4"	4"

Tech Sheet 20398

Polypropylene, URT

0108	Thread
PMT3URT	3"
PMT4URT	4"

Tech Sheet 20397



stainless steel

Stainless Steel, BSPP

0108	Thread	To Suit Hose ID
SSCT1	1"	1"
SSCT114	1.1/4"	1.1/4"
SSCT112	1.1/2"	1.1/2"
SSCT2	2"	2"
SSCT212	2.1/2"	2.1/2"

Tech Sheet 20398



Alloy, BSPP

0108	Thread	To Suit Hose ID
ACT112	1.1/2"	1.1/2"
ACT2	2"	2"
ACT212	2.1/2"	2.1/2"
ACT3BSP	3"	3"
ACT4BSP	4"	4"

Tech Sheet 20398

TRENCH PUMP HOSE COUPLINGS - LUG TYPE

Female URT

- Poly washer included



Alloy, URT

0108	Thread	To Suit Hose ID
ACT3URT	3"	3"
ACT4URT	4"	4"
Tech Sheet 20400		

- Poly washer included



Polypropylene, URT

0108	Thread	To Suit Hose ID
PCT3URT	3"	3"
PCT4URT	4"	4"

- Poly washer included



stainless
steel

Stainless Steel, URT

0108	Thread	To Suit Hose ID
SSCT3URT	3"	3"

- Poly washer included



Gunmetal, URT

0108	Thread	To Suit Hose ID
GMCT3URT	3"	3"
GMCT4URT	4"	4"

Key Spanners



Aluminium

0108	To Suit	Description
KEY2	2"	Double Ended Spanner
KEY3	3"	Single Ended Spanner
KEY4	4"	Single Ended Spanner

Brass, Lugged, Screw-together Couplings



Brass Cap & Tail

0019	Thread	To Suit Hose ID
STCAS-12	1/2"	1/2"
STCAS-34	3/4"	3/4"
STCAS-1-12	1"	1/2"
STCAS-1-34	1"	3/4"
STCAS-1	1"	1"
STCAS-114-1	1.1/4"	1"
STCAS-114	1.1/4"	1.1/4"
STCAS-112-114	1.1/2"	1.1/4"
STCAS-112	1.1/2"	1.1/2"
STCAS-2	2"	2"
STCAS-3	3"	3"
STCAS-4	4"	4"



Female Linings

0019	To Suit Hose ID	To Suit Collar
STCL-12	1/2"	1/2"
STCL-1-12	1/2"	1"
STCL-34	3/4"	3/4"
STCL-1-34	3/4"	1"
STCL-1	1"	1"
STCL-114-1	1"	1.1/4"
STCL-114	1.1/4"	1.1/4"
STCL-112-114	1.1/4"	1.1/2"
STCL-112	1.1/2"	1.1/2"
STCL-2	2"	2"
STCL-3	3"	3"
STCL-4	4"	4"

Tech Sheet 20334



Male Threaded Half, BSPP

0019	Thread	To Suit Hose ID
STCM-12	1/2"	1/2"
STCM-34	3/4"	3/4"
STCM-1	1"	1"
STCM-114	1.1/4"	1.1/4"
STCM-112	1.1/2"	1.1/2"
STCM-2	2"	2"
STCM-3	3"	3"
STCM-4	4"	4"




Collar

0019	Thread
STCC-12	1/2"
STCC-34	3/4"
STCC-1	1"
STCC-114	1.1/4"
STCC-112	1.1/2"
STCC-2	2"
STCC-3	3"
STCC-4	4"

Customers who bought from
this page also purchased...

Layflat Hose
see Industrial Section 6





TRENCH PUMP HOSE COUPLINGS - LUG TYPE

Blanking Caps



Alloy, BSPP/URT with Chain

0108	Thread
ABCC112	1.1/2" BSPP
ABCC2	2" BSPP
ABCC212	2.1/2" BSPP
ABCCBSP3	3" BSPP
ABCCURT3	3" URT
ABCCBSP4	4" BSPP
ABCCURT4	4" URT



Polypropylene, BSPP/URT without Chain

0108	Thread
PBCWOC112	1.1/2" BSPP
PBCWOC2	2" BSPP
PBCWOC212	2.1/2" BSPP
PBCWOCBSP3	3" BSPP
PBCWOCURT3	3" URT
PBCWOCBSP4	4" BSPP
PBCWOCURT4	4" URT



Polypropylene, URT with Chain

0108	Thread
PBCCURT3	3"
PBCCURT4	4"



Gunmetal, BSPP/URT with Chain

0108	Thread
GBCC112	1.1/2" BSPP
GBCC2	2" BSPP
GBCC212	2.1/2" BSPP
GBCCBSP3	3" BSPP
GBCCURT3	3" URT
GBCCBSP4	4" BSPP

Blanking Plugs



Alloy, BSPP/URT with Chain

0108	Thread
ABPC2	2" BSPP
ABPC212	2.1/2" BSPP
ABPCBSP3	3" BSPP
ABPCURT3	3" URT



Polypropylene, BSPP/URT without Chain

0108	Thread
PBPWOC112	1.1/2" BSPP
PBPWOC2	2" BSPP
PBPWOC212	2.1/2" BSPP
PBPWOCBSP3	3" BSPP
PBPWOCURT3	3" URT
PBPWOCURT4	4" URT

Spare Chains



0108
CHAIN

Washers

Note: To suit malleable iron, brass and poly trench pump couplings, steel flat face nuts and tail



Leather

0108	Size
WL14	1/4"
WL38	3/8"
WL12	1/2"
WL34	3/4"
WL1	1"
WL114	1.1/4"
WL112	1.1/2"
WL2	2"
WL212	2.1/2"
WL3	3"
WL4	4"

Note: To suit malleable iron, brass and poly trench pump couplings, steel flat face nuts and tail



Rubber

0108	Size
WR114	1.1/4"
WR112	1.1/2"
WR2	2"
WR212	2.1/2"
WR3	3"
WR4	4"



Rubber URT

0108	Size
WR3URT	3"
WR4URT	4"

Note: To suit malleable iron, brass and poly trench pump couplings, steel flat face nuts and tail



Poly URT

0108	Size
WP3URT	3"
WP4URT	4"



Tanker Coupling Adaptors



Alloy

0108	Size
AAMF112112	1.1/2" M x 1.1/2" F
AAMF1122	1.1/2" M x 2" F
AAMF1123	1.1/2" M x 3" F
AAMM22	2" M x 2" M
AAMF22	2" M x 2" F
AAMF2212	2" M x 2.1/2" F
AAMF23	2" M x 3" F
AAMF2122	2.1/2" M x 2" F
AAMF212212	2.1/2" M x 2.1/2" F
AAMF2123	2.1/2" M x 3" F
AAMF32	3" M x 2" F
AAMF3212	3" M x 2.1/2" F
AAMM33	3" M x 3" M
AAMF33	3" M x 3" F
AAMF34	3" M x 4" F
AAMF43	4" M x 3" F
AAMM43	4" M x 3" M



Gunmetal

0108	Size
GMAMF1122	1.1/2" M x 2" F
GMAMF112212	1.1/2" M x 2.1/2" F
GMAMF1123	1.1/2" M x 3" F
GMAMF2112	2" M x 1.1/2" F
GMAMM22	2" M x 2" M
GMAMF2212	2" M x 2.1/2" F
GMAMF23	2" M x 3" F
GMAMF2122	2.1/2" M x 2" F
GMAMM212212	2.1/2" M x 2.1/2" M
GMAMF212212	2.1/2" M x 2.1/2" F
GMAMF2123	2.1/2" M x 3" F
GMAMF32	3" M x 2" F
GMAMF3212	3" M x 2.1/2" F
GMAMM33	3" M x 3" M
GMAMF33	3" M x 3" F
GMAMF34	3" M x 4" F
GMAMF43	4" M x 3" F

Thread Adaptors



Alloy, URT

0108	Size
AAMFURTURT34	3" URT M x 4" URT F (Lug)
AAMMBSPURT33	3" BSPP M x 3" URT M (Hex)



Gunmetal, URT

0108	Size
GMAMFURTURT34	3" URT M x 4" URT F (Lug)
GMAMMBSPURT33	3" BSPP M x 3" URT M (Hex)



Polypropylene, URT

0108	Size
PAMFURTURT34	3" URT M x 4" URT F (Lug)

Threaded Alloy Flanged Adaptors



Table D, URT

0108	Thread
AAF DURT3	3"
AAF DURT4	4"

NP16, URT

0108	Thread
AAFNPN16URT3	3"



For **XLPE Chemical**
Suction & Delivery
 see **Industrial Section 6**



COMBINATION STEEL NIPPLES & HOSE JOINERS

Combination Swaged Hose Nipples

NPT Plated Steel



0121	Thread	To Suit Hose ID mm
NCSNPT12	1/2"	12
NCSNPT34	3/4"	19
NCSNPT1	1"	25
NCSNPT114	1.1/4"	32
NCSNPT112	1.1/2"	38
NCSNPT2	2"	50
NCSNPT212	2.1/2"	63
NCSNPT3	3"	75
NCSNPT4	4"	100
NCSNPT6	6"	150

NPT Plated Steel, Long Tail



0121	Thread	To Suit Hose ID mm
NCLNPT6	6"	150

Steel Hose Menders, Long Length

Zinc Plated Steel



0108	To Suit Hose ID	Length mm
SV10R	3/8" (10mm)	75
SV13R	1/2" (13mm)	80
SV15R	5/8" (15mm)	105
SV19R	3/4" (19mm)	105
SV25R	1" (25mm)	160
SV32R	1.1/4" (32mm)	175
SV38R	1.1/2" (38mm)	215
SV50R	2" (50mm)	225

BSPT Plated Steel



1011	Thread
CNS-12	1/2"
CNS-34	3/4"
CNS-1	1"
CNS-114	1.1/4"
CNS-112	1.1/2"
CNS-2	2"
CNS-212	2.1/2"
CNS-3	3"
CNS-4	4"
CNS-5	5"
CNS-6	6"

stainless steel

BSPT Stainless Steel



1011	Thread
SCN-12	1/2"
SCN-34	3/4"
SCN-1	1"
SCN-114	1.1/4"
SCN-112	1.1/2"
SCN-2	2"
SCN-3	2"

Safety Steel Hose Menders, Long Length

Zinc Plated Steel with Safety Collar



0108	To Suit Hose ID	Length mm
SV13R/S	1/2" (13mm)	80
SV15R/S	5/8" (15mm)	105
SV19R/S	3/4" (19mm)	105
SV25R/S	1" (25mm)	160
SV32R/S	1.1/4" (32mm)	175
SV38R/S	1.1/2" (38mm)	215
SV50R/S	2" (50mm)	225
SV75R/S	3" (75mm)	250

Hose Joiners

Alloy



0108	To Suit Hose ID
JALL114	1.1/4"
JALL112	1.1/2"
JALL2	2"
JALL212	2.1/2"
JALL3	3"
JALL4	4"

Stainless Steel



0108	To Suit Hose ID
JSS34	3/4"
JSS1	1"
JSS114	1.1/4"
JSS112	1.1/2"
JSS2	2"
JSS3	3"
JSS4	4"

Plated Steel



1011	To Suit Hose ID
SHM-38	3/8"
SHM-12	1/2"
SHM-34	3/4"
SHM-1	1"
SHM-114	1.1/4"
SHM-112	1.1/2"
SHM-2	2"
SHM-212	2.1/2"
SHM-3	3"
SHM-4	4"
SHM-5	5"
SHM-6	6"
SHM-8	8"
SHM-10	10"

HEXAGON NUTS & TAILS

Hexagon Nuts & Tails

'A' Hex Nuts & Tails, BSPP Mild Steel



0108	Thread	To Suit Hose ID	Max Pressure PSI
NTA1	1"	1"	250
NTA114	1.1/4"	1.1/4"	150
NTA112	1.1/2"	1.1/2"	150
NTA2	2"	2"	150

'C' Plain Hex Nuts & Tails, BSPP Mild Steel



0108	Thread	To Suit Hose ID	Max Pressure PSI
NTC12	1/2"	1/2"	150
NTC34	3/4"	3/4"	150
NTC1	1"	1"	150
NTC114	1.1/4"	1.1/4"	150
NTC112	1.1/2"	1.1/2"	150
NTC2	2"	2"	150

SWC Nuts and Tails, BSPP Mild Steel



0108	Thread	To Suit Hose ID	Max Pressure PSI
NTSWC112	1.1/2"	1.1/2"	150
NTSWC2	2"	2"	150

FIRE HOSE & INSTANTANEOUS FIRE HOSE COUPLINGS

Adaptors



Aluminium Unpolished

0108	ID
FHAMIMI212212	2.1/2" M.I. x 2.1/2" M.I.
FHAFIFI212212	2.1/2" F.I. x 2.1/2" F.I.
FHAMIFBSP2122	2.1/2" M.I. x 2" F.BSP
FHAMIFBSP212212	2.1/2" M.I. x 2.1/2" F.BSP
FHAMIFBSP2122	2.1/2" F.I. x 2" M.BSP
FHAMIFBSP212212	2.1/2" F.I. x 2.1/2" M.BSP
FHAMIMBSP2122	2.1/2" M.I. x 2" M.BSP
FHAMIMBSP212212	2.1/2" M.I. x 2.1/2" M.BSP
FHAMIFBSP2122	2.1/2" F.I. x 2" F.BSP
FHAMIFBSP212212	2.1/2" F.I. x 2.1/2" F.BSP

Tech Sheet 20196

Rubber Gasket



0108	Size
FHCG	2.1/2"

Instantaneous Couplings



Aluminium Unpolished

0108	Size
FHCC212112	2.1/2" inst x 1.1/2" DR Hose Tail
FHCC212134	2.1/2" inst x 1.3/4" DR Hose Tail
FHCC2122	2.1/2" inst x 2" DR Hose Tail
FHCC212212	2.1/2" inst x 2.1/2" DR Hose Tail
FHCC2123	2.1/2" inst x 3" MS Hose Tail

Tech Sheet 20197



Male Half Instantaneous Couplings - Aluminium Unpolished

0108	Size
FHCC112MALE	2.1/2" inst x 1.1/2" DR Hose Tail
FHCC134MALE	2.1/2" inst x 1.3/4" DR Hose Tail
FHCC2MALE	2.1/2" inst x 2" DR Hose Tail
FHCC212MALE	2.1/2" inst x 2.1/2" DR Hose Tail
FHCC3MALE	2.1/2" inst x 3" MS Hose Tail

Tech Sheet 20201



Female Half Instantaneous Couplings - Aluminium Unpolished

0108	Size
FHCC112FEMALE	2.1/2" inst x 1.1/2" DR Hose Tail
FHCC134FEMALE	2.1/2" inst x 1.3/4" DR Hose Tail
FHCC2FEMALE	2.1/2" inst x 2" DR Hose Tail
FHCC212FEMALE	2.1/2" inst x 2.1/2" DR Hose Tail
FHCC234FEMALE	2.1/2" inst x 2.3/4" DR Hose Tail
FHCC3FEMALE	2.1/2" inst x 3" MS Hose Tail

Tech Sheet 20199

Blank Caps & Plugs



Aluminium Unpolished Blank Cap complete with Chain

0108	Size
FHCC212	2.1/2" F.I.

Tech Sheet 20198



Aluminium Unpolished Blank Plug complete with Chain

0108	Size
FHPC212	2.1/2" M.I.

Tech Sheet 20198

Standard Collecting Breeching



Unpolished

0108	Size
FHSCBMMF212	2.1/2" inst M x M x F

Tech Sheet 20202

Standard Dividing Breeching



Unpolished

0108	Size
FHSDBF212	2.1/2" inst F x F x M

Tech Sheet 20202

LEVER LOCK WATER PUMP COUPLINGS



JAYMAC
Industrial Hose & Accessories

Complete Connection Set

 **Maximum Working Pressure:**
2" to 3.1/2" 20 bar
4" to 8" 12 bar

Galvanised with Standard Rubber Sealing Ring

0120	Coupling Size	To Suit Hose ID
LLC2	50	2"
LLC33	76	3 Tail x 3"
LLC3312	89	3 Tail x 3.1/2"
LLC4	108	4"
LLC5	133	5"
LLC6	159	6"
LLC8	194	8"

Galvanised with Oil Resistant Rubber Sealing Ring

0120	Coupling Size	To Suit Hose ID
LLC2OROR	50	2"
LLC33OROR	76	3 Tail x 3"
LLC4OROR	108	4"
LLC8OROR	194	8"



Jaymac couplings provide a quick and easy way to join many lengths of hose together. They are commonly used for the pumping and transfer of water in the construction, road maintenance and general irrigation industries. They can also be used for loading and unloading road tankers.

Interchangeable with: BAUER

 **Maximum Working Temperature:**
+80°C

 **Maximum Working Pressure:**
2" to 3.1/2" 20 bar
4" to 8" 12 bar

Galvanised with Standard Rubber Sealing Ring

0372	Coupling Size	To Suit Hose ID
LLZDUTY-LLC2	50	2"
LLZDUTY-LLC3	76	3"
LLZDUTY-LLC3312	89	3" Tail x 3.1/2"
LLZDUTY-LLC4	108	4"
LLZDUTY-LLC6	159	6"
LLZDUTY-LLC8	194	8"

Tech Sheet 20540

STAINLESS STEEL LEVER LOCK WATER PUMP COUPLINGS

stainless
steel



0120	Coupling Size	To Suit Hose ID
LLSSMT2	50	2"
LLSSMT33	76	3"
LLSSMT3312	89	3" Tail x 3.1/2"
LLSSMT4	108	4"
LLSSMT6	159	6"
LLSSMT8	194	8"

Female x Hose Connector

Note: No O-ring



0120	Coupling Size	To Suit Hose ID
LLSFT2	50	2"
LLSFT3312	89	3" Tail x 3.1/2"
LLSFT4	108	4"
LLSFT6	159	6"
LLSFT8	194	8"

Oil Resistant Rubber Sealing Ring



0120	Coupling Siz/e
LLSSOROR2	50
LLSSOROR33	76
LLSSOROR3312	89
LLSSOROR4	108
LLSSOROR6	159
LLSSOROR8	194

Male Weld End

Other sizes available on request. Minimum quantity order may apply.



0120	Coupling Size
LLSSMWE2	50
LLSSMWE3312	89
LLSSMWE4	108
LLSSMWE6	159

Female Weld End

Note: No O-ring



0120	Coupling Size
LLSSFWE2	50
LLSSFWE33	76
LLSSFWE3312	89
LLSSFWE4	108
LLSSFWE6	159

Male x Male BSPP Pipe Thread

Other sizes available on request. Minimum quantity order may apply.



With Lever Closure Ring, BSPP

0120	Coupling Size	To Suit Hose ID
LLSSMBSP2	50	2"
LLSSMBSP33	76	3"
LLSSMBSP3312	89	3" BSPP x 3.1/2"
LLSSMBSP4	108	4"

Female complete with BSPP Male Pipe Thread

Other sizes available on request. Minimum quantity order may apply.

Note: No O-ring



0120	Coupling Size	Thread
LLSSFBSPP2	50	2"
LLSSFBSPP33	76	3"
LLSSFBSPP3312	89	3" BSPP x 3.1/2"
LLSSFBSPP4	108	4"
LLSSFBSPP5	133	5"
LLSSFBSPP6	159	6"

Male End Cap



0120	Coupling Size
LLSSMEC2	50
LLSSMEC33	76
LLSSMEC3312	89
LLSSMEC4	108
LLSSMEC5	133
LLSSMEC6	159

Female End Cap

Other sizes available on request. Minimum quantity order may apply.

Note: No O-ring



0120	Coupling Size
LLSSFEC3312	89
LLSSFEC4	108
LLSSFEC6	159

Please note: all female connectors do not come complete with O-ring



LEVER LOCK WATER PUMP COUPLINGS

Male x Hose Connector



Galvanised

0120	Coupling Size	To Suit Hose ID
LLMT2	50	2"
LLMT33	76	3" Tail x 3"
LLMT3312	89	3" Tail x 3.1/2"
LLMT4	108	4"
LLMT5	133	5"
LLMT6	159	6"
LLMT8	194	8"

Female x Hose Connector



Galvanised

0120	Coupling Size	To Suit Hose ID
LLFT2	50	2"
LLFT33	76	3" Tail x 3"
LLFT3312	89	3" Tail x 3.1/2"
LLFT4	108	4"
LLFT5	133	5"
LLFT6	159	6"
LLFT8	194	8"

Lever Closure Ring



Galvanised

0120	Coupling Size	To Suit Hose ID
LLCR2	50	2"
LLCR33	76	3" Tail x 3"
LLCR3312	89	3" Tail x 3.1/2"
LLCR4	108	4"
LLCR5	133	5"
LLCR6	159	6"
LLCR8	194	8"

Rubber Sealing Ring

Natural Rubber (NR)



0120	Coupling Size
LLOR2	50
LLOR33	76
LLOR3312	89
LLOR4	108
LLOR5	133
LLOR6	159
LLOR8	194

Oil Resistant Rubber Sealing Ring

Nitrile Rubber (NBR)



0120	Coupling Size
LLOROR2	50
LLOROR33	76
LLOROR3312	89
LLOROR4	108
LLOROR5	133
LLOROR6	159
LLOROR8	194

Male x Male BSPT Pipe Thread



With Lever Closure Ring, Galvanised

0120	Coupling Size	Thread	To Suit Hose ID
LLMBSP112	50	-	1.1/2"
LLMBSP2	50	-	2"
LLMBSP212	76	-	2.1/2"
LLMBSP33	76	3" BSPP	3"
LLMBSP3312	89	3" BSPP	3.1/2"
LLMBSP4	108	-	4"
LLMBSP5	133	-	5"
LLMBSP6	159	-	6"
LLMBSP8	194	-	8"

Male complete with URT Male/Female Thread



With Lever Closure Ring, Ungalvanised, URT

0120	Coupling Size	Thread
LLM44URTM	4" Male	4" Male
LLM44URTF	4" Male	4" Female

Please note: all female connectors do not come complete with O-ring

LEVER LOCK WATER PUMP COUPLINGS

Female complete with BSPP Male Pipe Thread



Galvanised

0120	Coupling Size	Thread	To Suit Hose ID
LLFBSP112	50	-	1.1/2"
LLFBSP2	50	-	2"
LLFBSP212	76	-	2.1/2"
LLFBSP33	76	3" BSPP	3"
LLFBSP3312	89	3" BSPP	3.1/2"
LLFBSP4	108	-	4"
LLFBSP5	133	-	5"
LLFBSP6	159	-	6"
LLFBSP8	194	-	8"

Female complete with URT Male/Female Thread



Ungalvanised

0120	Coupling Size	Thread
LLF333URTF	3" Female	3" Female
LLF33123URTF	3.1/2" Female	3" Female
LLF44URTM	4" Female	4" Male
LLF44URTF	4" Female	4" Female

Male Weld End



Ungalvanised

0120	Coupling Size
LLMWE2	50
LLMWE33	76
LLMWE3312	89
LLMWE4	108
LLMWE5	133
LLMWE6	159
LLMWE8	194

Female Weld End

Note: No O-Ring



Ungalvanised

0120	Coupling Size
LLFWE2	50
LLFWE33	76
LLFWE3312	89
LLFWE4	108
LLFWE5	133
LLFWE6	159
LLFWE8	194

Flanged Male, Table D



Galvanised

0120	Coupling Size
LLMFD2	50
LLMFD33	76
LLMFD3312	89
LLMFD4	108
LLMFD46	108 x 6"
LLMFD5	133
LLMFD6	159
LLMFD8	194

Flanged Female, Table D



Galvanised

0120	Coupling Size
LLFFD2	50
LLFFD33	76
LLFFD3312	89
LLFFD4	108
LLFFD6	159
LLFFD8	194

Flanged Male, Table E



Galvanised

0120	Coupling Size
LLMFE162	50
LLMFE1633	76
LLMFE163312	89
LLMFE164	108
LLMFE1646	108 x 6"
LLMFE165	133
LLMFE166	159
LLMFE168	194

Flanged Female, Table E

Note: No O-Ring



Galvanised

0120	Coupling Size
LLFFE162	50
LLFFE1633	76
LLFFE163312	89
LLFFE164	108
LLFFE1646	108 x 6"
LLFFE165	133
LLFFE166	159
LLFFE168	194

Lever Closure Ring



Ungalvanised

0108	Coupling Size
LCRB2	50
LCRB33	76
LCRB3312	89
LCRB4	108
LCRB5	133
LCRB6	159
LCRB8	194

Please note: all female connectors do not come complete with O-ring

LEVER LOCK WATER PUMP COUPLINGS



Y Unions



Y Union with Female Outlet, Galvanised

0120	Coupling Size
LLYMMF2	50
LLYMMF33	76
LLYMMF3312	89
LLYMMF4	108
LLYMMF6	159



Y Union with Male Outlet, Galvanised

0120	Coupling Size
LLYFFM2	50
LLYFFM33	76
LLYFFM3312	89
LLYFFM4	108
LLYFFM6	159

Male End Cap



With Lever Closure

0120	Coupling Size
LLMEC2	50
LLMEC33	76
LLMEC3312	89
LLMEC4	108
LLMEC5	133
LLMEC6	159
LLMEC8	194

Female End Caps

Note: No O-Ring



Galvanised

0120	Coupling Size
LLFEC2	50
LLFEC33	76
LLFEC3312	89
LLFEC4	108
LLFEC5	133
LLFEC6	159
LLFEC8	194

Female x Male Reducer

Note: No O-Ring



Galvanised

0120	Description
LLFM332	76 Female x 50 Male
LLFM33122	89 Female x 50 Male
LLFM331233	89 Female x 76 Male
LLFM433	108 Female x 76 Male
LLFM43312	108 Female x 89 Male
LLFM54	133 Female x 108 Male
LLFM64	159 Female x 108 Male
LLFM65	159 Female x 133 Male
LLFM86	194 Female x 159 Male

T Unions

Note: No O-Ring



T Union with Female Outlet, Galvanised

0120	Coupling Size
LLTMFF2	50
LLTMFF4	108
LLTMFF6	159

Note: No O-Ring



T Union with Male Outlet, Galvanised

0120	Coupling Size
LLTMMF2	50
LLTMMF33	76
LLTMMF3312	89
LLTMMF4	108
LLTMMF5	133
LLTMMF6	159
LLTMMF8	194

Please note: all female connectors do not come complete with O-ring

Male x Female Riser

Note: No O-Ring



Galvanised

0120	Description
LLFM233	50 Female x 76 Male
LLFM23312	50 Female x 89 Male
LLFM333312	76 Female x 89 Male
LLFM334	76 Female x 108 Male
LLFM33124	89 Female x 108 Male
LLFM45	108 Female x 133 Male
LLFM46	108 Female x 159 Male
LLFM56	133 Female x 159 Male
LLFM68	159 Female x 194 Male

Safety Pins



Galvanised Steel

0108	To Suit Coupling Size
LLMSSPIN50	50
LLMSSPIN76	76
LLMSSPIN89108	89 - 108
LLMSSPIN133	133
LLMSSPIN159194	159 - 194

45° Bends

Note: No O-Ring



45° Bend, Galvanised

0120	Coupling Size
LL45B2	50
LL45B33	76
LL45B3312	89
LL45B4	108
LL45B5	133
LL45B6	159
LL45B8	194



Male Flanged 45° Bend - NP16, Galvanised

0120	Coupling Size
LL45MF4	108
LL45MF6	159

Note: No O-Ring



Female Flanged 45° Bend - NP16, Galvanised

0120	Coupling Size
LL45FF4	108
LL45FF6	159

30° Bends

Note: No O-Ring



30° Bend, Galvanised

0120	Coupling Size
LL30B2	50
LL30B3	76
LL30B33	89
LL30B4	108
LL30B5	133
LL30B6	159
LL30B8	194

Please note: all female connectors do not come complete with O-ring



LEVER LOCK WATER PUMP COUPLINGS

90° Bends

Note: No O-Ring



90° Bend, Galvanised

0120	Coupling Size
LL90B2	50
LL90B33	76
LL90B3312	89
LL90B4	108
LL90B5	133
LL90B6	159
LL90B8	194



Male Flanged 90° Bend - NP16, Galvanised

0120	Coupling Size
LL90MF33	76
LL90MF3312	89
LL90MF4	108
LL90MF6	159
LL90MF8	194

Note: No O-Ring



Female Flanged 90° Bend, NP16 - Galvanised

0120	Coupling Size
LL90FF33	76
LL90FF3312	89
LL90FF4	108
LL90FF6	159
LL90FF8	194

Male Flanged 90° Bend - Table D, Galvanised

0120	Coupling Size
LL90MF3312TD	89
LL90MF4TD	108
LL90MF6TD	159

Note: No O-Ring



Female Flanged 90° Bend - Table D, Galvanised

0120	Coupling Size
LL90FF2TD	50
LL90FF4TD	108

Customers who bought from this page also purchased...



Carbon Steel Flanges
see Industrial Section 4

Strainers

G.P. Strainers, Steel Galvanised

0120	Coupling Size
LLGP2	50
LLGP3312	89
LLGP4	108
LLGP6	159
LLGP8	194



Sewage Strainers, Steel Galvanised

0120	Coupling Size
LLSS4	108
LLSS6	159



Male Foot Valve Strainer, Galvanised

0120	Coupling Size
LLFVSM2	50
LLFVSM33	76
LLFVSM3312	89
LLFVSM4	108
LLFVSM5	133
LLFVSM6	159
LLFVSM8	194



Hose Tail Foot Valve Strainer, Galvanised

0120	To Suit Hose ID
LLFVSHT2	2"
LLFVSHT3	3"
LLFVSHT4	4"
LLFVSHT5	5"
LLFVSHT6	6"
LLFVSHT8	8"
LLFVSHT12	12"



Please note: all female connectors do not come complete with O-ring



Large Bore Dallai Couplings

Couplings



Male Hose Tail

0120	Coupling Size
LLMT10	10"
LLMT12	12"

Note: No O-Ring



Female Hose Tail

0120	Coupling Size
LLFT10	10"
LLFT12	12"



O-Ring

0120	Coupling Size
LLOR10	10"
LLOR12	12"



Flanged Male

0120	Coupling Size
LLMF10	10"
LLMF12	12"

Note: No O-Ring



Flanged Female

0120	Coupling Size
LLFF10	10"
LLFF12	12"

Note: No O-Ring



Male x Female 90° Bend

0120	Coupling Size
LL90B10	10"
LL90B12	12"

Note: No O-Ring



Male x Female 45° Bend

0120	Coupling Size
LL45B10	10"
LL45B12	12"



Male Blank Ends

0120	Coupling Size
LLMEC10	10"
LLMEC12	12"



Male Weld Ends

0120	Coupling Size
LLMWE12	12"


Note: No O-Ring



Female Weld Ends

0120	Coupling Size
LLFWE10	10"
LLFWE12	12"

JAYMAC
Industrial Hose & Accessories

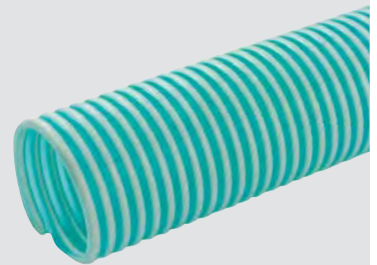

For **Water Delivery Hose**
see **Industrial Section 6**

INDUSTRIAL

Please note: all female connectors do not come complete with O-ring



LEVER LOCK WATER PUMP COUPLINGS

Jaymac four bolt hole MZ flange couplings are commonly used on a wide range of agricultural slurry tankers and spreaders.

Jaymac couplings provide a quick and easy way to join many lengths of hose together.

They are commonly used for the pumping and transfer of water in the construction, road maintenance and general irrigation industries. They can also be used for loading and unloading road tankers.

Interchangeable with: BAUER.

° Maximum Working Temperature: +80°C

Maximum Working Pressure:
2" to 3.1/2": 20 bar
4" to 8": 12 bar

Male Square MZ Flange



With Closure Ring, Galvanised

0372	Coupling Size
LLZD-MZLLM89	89
LLZD-MZLLM108	108
LLZD-MZLLM133	133
LLZD-MZLLM159	159
LLZD-MZLLM194	194

Tech Sheet 68126

Lever Closure Ring



Galvanised

0372	Coupling Size
LLZD-LLCR2	50
LLZD-LLCR33	76
LLZD-LLCR3312	89
LLZD-LLC4	108
LLZD-LLCR5	133
LLZD-LLCR6	159
LLZD-LLCR8	194

Female x Male BSPT Pipe Thread



Galvanised

0372	Coupling Size	Thread
LLZD-LLFBSP2	50	2"
LLZD-LLFBSP212	76	2.5"
LLZD-LLFBSP33	76	3"
LLZD-LLFBSP4	108	4"
LLZD-LLFBSP5	133	5"
LLZD-LLFBSP6	159	6"
LLZD-LLFBSP8	194	8"

Female Square MZ Flange



With Sealing Ring

0372	Coupling Size
LLZD-MZFF89	89
LLZD-MZFF108	108
LLZD-MZFF133	133
LLZD-MZFF159	159
LLZD-MZFF194	194

Tech Sheet 68127

Male x Male BSPT Pipe Thread



With Closure Ring, Galvanised

0372	Coupling Size	Thread
LLZD-LLMBSP2	50	2"
LLZD-LLMBSP212	76	2.5"
LLZD-LLMBSP33	76	3"
LLZD-LLMBSP4	108	4"
LLZD-LLMBSP5	133	5"
LLZD-LLMBSP6	159	6"
LLZD-LLMBSP8	194	8"

Male Weld End




Ungalvanised

0372	Coupling Size
LLZD-LLMWE33	76
LLZD-LLMWE3312	89
LLZD-LLMWE4	108
LLZD-LLMWE5	133
LLZD-LLMWE6	159
LLZD-LLMWE8	194

Customers who bought from this page also purchased...



Layflat Hose
see **Industrial Section 6**

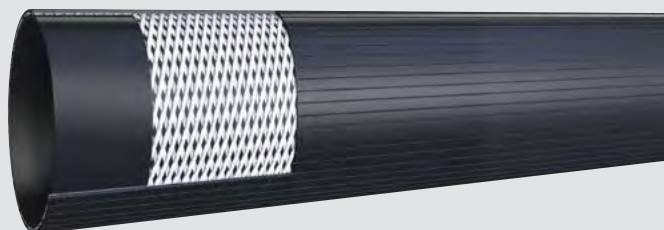

LEVER LOCK WATER PUMP COUPLINGS



Jaymac four bolt hole MZ flange couplings are commonly used on a wide range of agricultural slurry tankers and spreaders.

Jaymac couplings provide a quick and easy way to join many lengths of hose together.

They are commonly used for the pumping and transfer of water in the construction, road maintenance and general irrigation industries. They can also be used for loading and unloading road tankers.

Interchangeable with: BAUER.

Maximum Working Temperature: +80°C

Maximum Working Pressure:
 2" to 3.1/2": 20 bar
 4" to 8": 12 bar



Female Weld End



Ungalvanised

0372	Coupling Size
LLZD-LLFWE2	50
LLZD-LLFWE33	76
LLZD-LLFWE3312	89
LLZD-LLFWE4	108
LLZD-LLFWE5	133
LLZD-LLFWE6	159
LLZD-LLFWE8	194

Female End Caps



Galvanised

0372	Coupling Size
LLZD-LLFEC2	50
LLZD-LLFEC33	76
LLZD-LLFEC3312	89
LLZD-LLFEC4	108
LLZD-LLFEC5	133
LLZD-LLFEC6	159
LLZD-LLFEC8	194

Strainers



G.P. Strainers, Steel Galvanised

0372	Coupling Size
LLZD-LLGP2	50
LLZD-LLGP3312	89
LLZD-LLGP4	108
LLZD-LLGP5	133
LLZD-LLGP6	159
LLZD-LLGP8	194

Male End Cap



Galvanised

0372	Coupling Size
LLZD-LLMEC2	50
LLZD-LLMEC33	76
LLZD-LLMEC3312	89
LLZD-LLMEC4	108
LLZD-LLMEC5	133
LLZD-LLMEC6	159
LLZD-LLMEC8	194

90° Bends




Galvanised

0372	Coupling Size
LLZD-LL90B2	50
LLZD-LL90B33	76
LLZD-LL90B3312	89
LLZD-LL90B4	108
LLZD-LL90B5	133
LLZD-LL90B6	159
LLZD-LL90B8	194

Customers who bought from this page also purchased...



Heavy-duty Suction Hose
 see Industrial Section 6

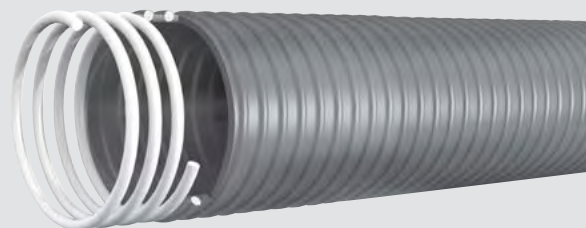

CLAW COUPLINGS

LÜDECKE

1



Couplings



INDUSTRIAL

1005

Claw Couplings DIN 3489

° Working Temperature:
-40°C to +95°C

Maximum Working
Pressure: 10 bar

Universal system for compressed air
in construction and industry.

Material: Malleable iron/steel
Seal: Nitrile

Media: Compressed air
Claw Distance: 42 mm



Female Thread, BSPP (formerly DIN 3482)

6295	Thread
KIG14	1/4"
KIG38	3/8"
KIG12	1/2"
KIG34	3/4"
KIG10	1"
KIG54	1.1/4"



Male Thread, BSPP (formerly DIN 3481)

6295	Thread
KAG14	1/4"
KAG38	3/8"
KAG12	1/2"
KAG34	3/4"
KAG1	1"
KAG54	1.1/4"



Blank End (formerly DIN 3483)

6295	Description
VK0	Blank End
VKM	Blank End with Chain
VKM-K	Spare Chain 200mm

Hose Tail (formerly DIN 3483)

6295	To Suit Hose ID mm
SKG6	6
SKG10	10
SKG13	13
SKG15	15
SKG19	19
SKG25	25
SKG32	32



Hose Tail with Safety Collar

6295	To Suit Hose ID mm
SKB13	13
SKB19	19
SKB25	25



Original DIN 3489 Seals

6295	Medium	Colour	Material	Max Temp °C
GOER	Compressed Air	Black	Nitrile	95°C
GPOR	Food	Natural	EPDM	130°C
GVOR	Chemicals	Green	FKM	200°C
GDOR	Steam	Red	TFEP	200°C

MODY Safety-Screwing Claw Couplings DIN 3238

° Working Temperature:
-40°C to +95°C

Maximum Working
Pressure: 16 bar

Secured by locking nut to prevent
unintentional opening, for safe air
lines in construction and industry.

Material: Malleable iron/steel, brass locking nut
Seal: Nitrile

Media: Compressed air
Claw Distance: 42 mm



Hose Tail

6295	To Suit Hose ID mm
SSG10	10
SSG13	13
SSG15	15
SSG19	19
SSG25	25
SSG32	32



Hose Tail with Safety Collar

6295	To Suit Hose ID mm
SSG10S	10
SSG13S	13
SSG15S	15
SSG19S	19
SSG25S	25



Male Thread, BSPP with LÜDSY Sealing

6295	Thread
SSGA38	3/8"
SSGA12	1/2"
SSGA34	3/4"
SSGA10	1"



Hose Tail, Hydraulic Crimping

6295	To Suit Hose ID mm
SSG19PH	19

Female Thread, BSPP

6295	Thread
SSGI38	3/8"
SSGI12	1/2"
SSGI34	3/4"
SSGI10	1"



Original MODY Seal

6295	Medium	Colour	Material	Max Temp °C
SGOR-N	Compressed Air	Black	Nitrile	95°C

Safety Claw Couplings with Bore

 **Working Temperature:**
-40°C to +95°C

 **Maximum Working Pressure:** 10 bar

Universal system, mainly used in mining and tunneling. Additional security by using the safety-clips DIN 11024 to prevent unintentional opening.

Material: Malleable iron/steel

Seal: Nitrile

Media: Compressed air

Claw Distance: 42 mm



Hose Tail with Safety Collar

6295	To Suit Hose ID mm
SKSS13	13
SKSS19	19
SKSS25	25



Hose Clamps DIN 20039 B, to suit Couplings with Hose Tail & Safety Collar

6295	To Suit Hose ID mm	Hose OD Range mm
SK29	13	22-29
SK34	19	28-32
SK39	25	35-42
SK60	42	55-60
SK44	28	42-45
SK51	35	45-53
SK73	50	60-73

Female Thread, BSPP

6295	Thread
KISS12	1/2'
KISS34	3/4'
KISS10	1'



Universal Safety Clip DIN 11024

6295
USC-1

Male Thread, BSPP

6295	Thread
KASS12	1/2'
KASS34	3/4'
KASS10	1'



ACK Claw Couplings, Forged Steel

 **Working Temperature:**
-40°C to +95°C

 **Maximum Working Pressure:** 16 bar

High quality coupling for compressed air in construction and industry, equivalent to Atlas Copco.

Material: Forged steel, hardened

Seal: Nitrile

Media: Compressed air

Claw Distance: 42 mm



Hose Tail

6295	To Suit Hose ID mm
ACK38T	10
ACK12T	12.5
ACK34T	20
ACK10T	25

Female Thread, BSPP

6295	Thread
ACK38I	3/8'
ACK12I	1/2'
ACK34I	3/4'
ACK10I	1'



Male Thread, BSPP

6295	Thread
ACK38A	3/8'
ACK12A	1/2'
ACK34A	3/4'
ACK10A	1'





Claw Couplings DIN 3489, Stainless Steel

° Working Temperature:
-30°C to +200°C

Maximum Working
Pressure: 16 bar

Universal system for aggressive fluids in chemical or petrochemical industry, as well as food or drinking water applications.
Use original DIN 3489 Seal GPOR (EPDM) food or drinking water applications.

Material: Stainless steel 1.4401/1.4404
Seal: FKM
Media: Chemical substances
Claw Distance: 42 mm



stainless
steel



stainless
steel



Hose Tail

6295	To Suit Hose ID mm
EKT10V	10
EKT13V	13
EKT19V	19
EKT25V	25

stainless
steel



Female Thread, BSPP

6295	Thread
EKI38V	3/8"
EKI12V	1/2"
EKI34V	3/4"
EKI10V	1"

Male Thread, BSPP

6295	Thread
EKA12V	1/2"
EKA34V	3/4"
EKA10V	1"

stainless
steel



Blank End

6295	Description
EK0V	Blank End
EKMV	Blank End with Chain
EKMV-K	Spare Chain 200mm

WaterProfi Claw Couplings

° Working Temperature:
+95°C

Maximum Working
Pressure: 25 bar

Universal coupling of forged brass for water lines in industry, construction, agriculture or civil installations.

Material: Forged brass CW617N
Seal: EPDM

Media: Water
Claw Distance: 40 mm



Hose Tail

6295	To Suit Hose ID mm
GSK10	10
GSK13	13
GSK16	16
GSK19	19
GSK25	25
GSK32	32
GSK38	38



Male Thread, BSPP

6295	Thread
GKA14	1/4"
GKA38	3/8"
GKA12	1/2"
GKA34	3/4"
GKA10	1"
GKA54	1.1/4"
GKA15	1.1/2"



Female Thread, BSPP with O-Ring

6295	Thread
GKI14	1/4"
GKI38	3/8"
GKI12	1/2"
GKI34	3/4"
GKI10	1"
GKI54	1.1/4"
GKI15	1.1/2"



Blank End

6295
GKO



Original WaterProfi Seal

6295	Medium	Colour	Material	Max Temp °C
GKOR	Water	Black	EPDM	95°C



European Execution Double Lock Claw Couplings

 **Maximum Working Pressure:** 10 bar



Q1 Hose Tails, Plated

0108	To Suit Hose ID
Q1DLP14	1/4"
Q1DLP38	3/8"
Q1DLP12	1/2"
Q1DLP58	5/8"
Q19SDLP34	3/4" (Q19S)
Q1DLP1	1"
Q1DLP114	1.1/4"
Tech Sheet 20303	

 **Maximum Working Pressure:** 7 bar



Q2 Female Thread, Plated, BSPP

0108	Thread
Q2DLP14	1/4"
Q2DLP38	3/8"
Q2DLP12	1/2"
Q2DLP34	3/4"
Q2DLP1	1"
Q2DLP114	1.1/4"
Tech Sheet 20304	

Q4 Blanking Off End

0108	Q4
Tech Sheet 20306	

 **Maximum Working Pressure:** 7 bar



Q3 Male Thread, Plated, BSPP

0108	Thread
Q3DLP14	1/4"
Q3DLP38	3/8"
Q3DLP12	1/2"
Q3DLP34	3/4"
Q3DLP1	1"
Q3DLP114	1.1/4"
Tech Sheet 20305	

Q Rubbers

0108	Material
QRNIT	Nitrile
QR	Neoprene
Tech Sheet 20307	

- 33mm diameter



Gauze, Stainless Steel

0108	GAUZE
------	-------

Double Lock QC Claw Couplings

 **Maximum Working Pressure:** 7 bar



QC1 Hose Tails, Plated

0108	To Suit Hose ID
QC112	1/2"
QC134	3/4"
QC11	1"



QC2 Female Thread, Plated, BSPP

0108	Thread
QC212	1/2"
QC234	3/4"
QC21	1"

QC3 Male Thread, Plated, BSPP

0108	Thread
QC312	1/2"
QC334	3/4"
QC31	1"



QC2 Female Thread, Gunmetal, BSPP

0108	Thread
QC2GM34	3/4"

QC Rubber

0108	QCR
------	-----





QUICK RELEASE PNEUMATIC HOSE COUPLINGS

QAY US Execution Claw Couplings

- US execution with bore for safety clip



Maximum Working Pressure:
12 bar



QAY 1 Hose Tails

0108	To Suit Hose ID
QAY138	3/8"
QAY112	1/2"
QAY134	3/4"
QAY11	1"



QAY 2 Female Thread, NPT

0108	Thread
QAY238	3/8"
QAY212	1/2"
QAY234	3/4"
QAY21	1"

QAY 3 Male Thread, NPT

0108	Thread
QAY338	3/8"
QAY312	1/2"
QAY334	3/4"
QAY31	1"



QAY 4, Hose Tail with Ferrule

0108	To Suit Hose ID
QAY412	1/2"
QAY434	3/4"
QAY41	1"



QAY Blank End

0108
QAYBE



Safety Locking Pins

0108
PINS

Tech Sheet 20179



QAY Spare Rubber

0108
QAYR

QAC Claw Couplings



Maximum Working Pressure: 9.5 bar



QAC 1 Hose Tail, Forged Steel

0108	To Suit Hose ID
QAC138	3/8"
QAC112	1/2"
QAC134	3/4"
QAC11	1"

Tech Sheet 20308



QAC 2 Female Thread, Forged Steel, BSPP

0108	Thread
QAC212	1/2"
QAC234	3/4"
QAC21	1"

Tech Sheet 20309



QAC 3 Male Thread, Forged Steel, BSPP

0108	Thread
QAC312	1/2"
QAC334	3/4"
QAC31	1"

Tech Sheet 20310



QAC 4 Hose Tail, Forged Steel

0108	To Suit Hose ID
QAC412	1/2"
QAC434	3/4"

Tech Sheet 20311

SS Claw Couplings



Maximum Working Pressure: 9.5 bar



SS1 Hose Tail

0108	To Suit Hose ID
SS112	1/2"
SS134	3/4"
SS11	1"

Tech Sheet 20316



SS2 Female Thread, BSPP

0108	Thread
SS212	1/2"
SS234	3/4"
SS21	1"

Tech Sheet 20317



SS3 Male Thread, BSPP

0108	Thread
SS312	1/2"
SS334	3/4"
SS31	1"

Tech Sheet 20318

Due to the change of finishes used by our supplier, the product you receive may be different to that illustrated.

QUICK RELEASE WATER HOSE COUPLINGS



Series GK, Brass Water Couplings



Hose Tail

0108	To Suit Hose ID
GT38	3/8"
GT58	5/8"
GK-TF13	1/2"
GK-TF19	3/4"
GK-TF25	1"
GK-TF31	1.1/4"
GK-TF38	1.1/2"

Tech Sheet 20333



Female Thread, BSPP

0101	Thread
GK-IW21	1/2"
GK-IW26	3/4"
GK-IW33	1"
GK-IW42	1.1/4"
GK-IW50	1.1/2"

Tech Sheet 20333



Male Thread, BSPP

0108	Thread
GM38	3/8"
GK-AW21	1/2"
GK-AW26	3/4"
GK-AW33	1"
GK-AW42	1.1/4"
GK-AW50	1.1/2"

Tech Sheet 20333

Metal Soft Rain Lance



0108	Length mm
KA-15-20-00	600
KA-15-20-09	900
KA-15-20-12	1200

Safety Couplings



0108	To Suit Hose ID
GTLC12	1/2"
GTLC34	3/4"
GTLC1	1"

Spray Nozzles



0101	Thread
GK-SP34	3/4"

Blanking Cap



0101
GK-BC

Triple Outlet Connector



0101
GK-3Y



Replacement Seal

0101	Description
GK-GASKET	Suits All Sizes

CLAMPS, NUTS & BOLTS



Clamps

Note: All sizes are for guidance only. Nuts and bolts included.



Golden Range Clamps, Zinc & Gold Passivated

0108	Min Size mm	Max Size mm
HD.000	17	22
HD.001	20	29
HD.002	28	35
HD.003	32	40
HD.004	39	49
HD.005	48	60
HD.006	60	76
HD.007	77	94
HD.1	89	101
HD.2	101	113
HD.3	113	127
HD.5	140	154
HD.6	154	175
HD.7	175	194
HD.9	210	225



SK Clamps, Zinc & Gold Passivated

0108	ID	Min Size mm	Max Size mm
SK34	3/4"	29	34
SK39	1"	33	40
SK44	1.1/4"	41	49
SK51	1.1/2"	47	60
SK73	2"	60	77



IL Clamps, Zinc & Gold Passivated

0108	ID	Min Size mm	Max Size mm
CILP12	1/2"	17	22
CILP34	3/4"	27	32

Tech Sheet 20393

Note: To suit
Staysafe
couplings



Staysafe Clamps, Zinc & Gold Passivated

0108	ID	Min Size mm	Max Size mm
JA2	1/2"	21	25
JA3	3/4"	29	33
JA4	3/4"	31	35

Tech Sheet 20395



Clamps - Type A /Q19S/SWC, Unplated

0108	ID	OD mm	To Suit Hose OD
CA12	1/2"	19	-
CA34	3/4"	28	-
CA34Q19S/DL	3/4"	29-33	3/4" Q19S DL Coupling
CA1	1"	35	-
CA112	1.1/2"	49-56	1.1/2" A Nut & Tail
CSWC112	1.1/2"	52-55	1.1/2" SWC Nut & Tail
CSWC2	2"	64-71	2" SWC Nut & Tail
CA234	2.3/4"	65-70	2" Nut & Tail

Tech Sheet 20392



T-Bar Clamps

0108	ID
TBAR2	2"
TBAR3	3"
TBAR4	4"

Tech Sheet 2155



Plain Type Clamps, Zinc & Gold Passivated

0108	ID	OD mm
CP78	7/8"	-
CP112	1.1/2"	-
CP218	2.1/8"	51
CP234	2.3/4"	70

Tech Sheet 20394

Nuts & Bolts



0108	Description
NBM840	M8 x 40mm Long
NBM1050	M10 x 50mm Long
NBM1060	M10 x 60mm Long

Malleable Iron Air & Steam Clamp



0108	ID	OD mm	Bolts
SA1	1/4"	14-17	2 Bolt
SA2	3/8"	17-21	2 Bolt
SA4	1/2"	24-27	2 Bolt
SA5	1/2"	27-30	2 Bolt
SA6	3/4"	30-33	2 Bolt
SA7	3/4"	33-38	2 Bolt
SA8	3/4"	38-43	2 Bolt
SA9	1"	38-43	2 Bolt
SA10	1"	39-44	4 Bolt
SA14	1.1/4"	52-57	4 Bolt
SA15	1.1/2"	52-57	4 Bolt
SA18	1.1/2"	63-69	4 Bolt
SA19	2"	63-69	4 Bolt
SA20	2"	64-71	4 Bolt



Couplings



Standpipes



Unpolished

0108	Description
STANDW	Anti Siphon Double Check Valve (Water Board)
STANDB	Single Swivel Head with HRT Base (Brigade)
STANDC	Contractors Standpipe 3/4"
STANDDS	Double Swivel Head with HRT Base
STANDSP	Single Plug-in Head with HRT Base
STANDS	Contractors Standpipe 3/4" Steel Tap BS10 c/w Doublecheck Valve to BS6282
STANDBG	Spare Standpipe Bottom Gasket

Customers who bought from this page also purchased...

**Water Flex Flexible
PVC Water Hose**
see **Industrial Section 6**




Manhole Lifting Keys



0108	Size
MAN6	6"
MAN12	12"
MAN20	20"
MAN24	24"

Drain Key & Bar T Handle

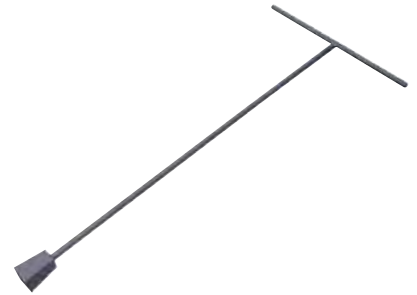

Unpolished

0108
DKBT

Hydrant Keys & Bars



Unpolished

0108	Description
HYDKB	Aluminium Key & Aluminium Bar
HYDK	Key Only
HYDB	Bar Only

SHOT BLAST COUPLINGS, HOSE & NOZZLE HOLDERS



Shot Blast Couplings



Malleable Iron

0108	To Suit Hose OD mm
SHOT3101	39
SHOT3102	48
SHOT3103	56
SHOT3104	60

These couplings are designed for use on sandblast and cement placing hose.
Supplied with screws.

 **Maximum Working Pressure:** 150 psi



Brass

6000	ID	OD mm
SBQ-34	3/4"	39



Nylon

0108	OD mm
SHOTCQP1	39
SHOTCQP2	48
SHOTCQP4	60

Threaded Couplings



Female Thread, Malleable Iron, BSPP

0108	Thread
SHOT3111	1.1/4"
SHOT3110	1.1/2"



Female Thread, Nylon, BSPP

0108	Thread
SHOTCFP	1.1/4"

Nozzle Holders



Alloy

0108	Thread
SD50-32A	48mm Coarse Thread
SD32-32A	48mm x 1.1/4" BSPP



Nylon

0108	Thread
NHP-34	33mm Coarse Thread
NHP-1	39mm Coarse Thread
HEP-1	39mm x 1.1/4" BSPP

Shot Blast Screws



0108
SHOTS

Safety Clips



0019	Description
LUE-USC-1	3mm Wire Clip

Rubber Rings



0108	Size
SHOTRSDKD	SKD Standard Seals
SHOTRSDR2	SDR2 for CQP-1
SHOTRSDR3	SDR-3 for CQP-2/3/4, CFP/CFP-50

Spare Rubber Seal



Suits All Sizes

0019
LUE-SKD-SEAL



Thread Stem Adaptors

Thread stem adaptors – to adapt your standard threaded stainless steel camlocks to plain stem types, for use with KSA range of clamps.



Part Code	Clamp Size
LUE-GTI 20-50 SS	KSA-63-67
LUE-GTI 30-75 SS	KSA-89-93

Female

0019	To Suit Hose ID	Thread
LUE-GTI 20-50 SS	50 x 8 (2")	2"
LUE-GTI 30-75 SS	75 x 8 (3")	3"

KSA Safety Clamps

Forged aluminium safety clamps, high quality and robust, easy to install and re-usable.



0019	To Suit Hose OD mm
LUE-KSA 36-39	36-39
LUE-KSA 63-67	63-67

Shot Blast Hose

Reinforcement: Textile wrapped.

Tube: NR/SBR/BR, Black smooth, antistatic abrasion resistant.

Cover: SBR, black, smooth, anti-static cloth impression.

Suitable for blasting sand and other media such as quartz sand, steel shot, corundum, glass, etc. The hose has added security against electrical shocks by electrically-conductive lining.

° Working Temperature:
-35°C to +80°C
(ambient temperature)



40 Metre Coils, 12 bar Hose

0101	ID mm	OD mm
SBH12-39	25	39
SBH12-48	32	48

GENUINE UNICONE FITTINGS

Genuine Unicorn Fittings



Instantaneous Joints with Drab Rubbers

0108	ID mm
UIJ3	80
UIJ4	100
UIJ6	150

Tech Sheet 1936



Serrated Hose Adaptors

0108	ID mm
USHT3	80
USHT4	100

Tech Sheet 1936



Neoprene Rings

0108	ID mm
UNR3	80
UNR4	100

Tech Sheet 1936



Plain Hose Tails

0108	ID mm
UPT3	80
UPT4	100
UPT6	150

Tech Sheet 1936

Flange Adaptors D/E NP10/16

0108	ID mm
UFA4	100

Tech Sheet 1936



Blank Ends

0108	ID mm
UBE3	80
UBE4	100

Tech Sheet 1936

Drab Rubber Rings

0108	ID mm
UDR4	100
UDR5	125
UDR6	150

Tech Sheet 1936

Weld On Pieces

0108	ID mm
UW4	100

Tech Sheet 1936

Screwed Male Adaptors x 3 Long

0108	ID mm
USMT4	100

Tech Sheet 1936





STEEL AIR & STEAM COUPLINGS & CLAMPS

Male Stem Only



0019	Thread	To Suit Hose ID
GMS-12	1/2"	1/2"
GMS-34	3/4"	3/4"
GMS-1	1"	1"
GMS-114	1.1/4"	1.1/4"
GMS-112	1.1/2"	1.1/2"
GMS-2	2"	2"

Ground Joint Couplings Complete



0019	Thread	To Suit Hose ID
GJS-12	1/2"	1/2"
GJS-34	3/4"	3/4"
GJS-1	1"	1"
GJS-114	1.1/4"	1.1/4"
GJS-112	1.1/2"	1.1/2"
GJS-2	2"	2"

Female Spud Only




0019	Thread
GSP-34	3/4"
GSP-1	1"
GSP-114	1.1/4"
GSP-112	1.1/2"
GSP-2	2"

Heavy-duty, 2 & 4 Bolt Clamps



2 Bolt



4 Bolt

0019	Bolts	To Suit Hose OD mm
SBC-12	2 Bolt	24-27
2052-9228	2 Bolt	27-30
SBC-34	2 Bolt	30-33
2052-9236	2 Bolt	33-38
2052-9244	2 Bolt	38-43
SBC-1	4 Bolt	39-43.5
2052-9251	4 Bolt	41-47
2052-9269	4 Bolt	48-52
2052-9277	4 Bolt	52-57
2052-9285	4 Bolt	53-58
SBC-2	4 Bolt	63.5-71
2052-9293	4 Bolt	89-100

Tech Sheet 20396

Steam Couplings

Heavy robust female and male thread screwings of zinc plated or brass, incl forged safety clamps of brass for steam hoses. Female thread screwing two parts, swivelling. Connecting nut flat sealing with thread sealing ring.

° Working Temperature:
up to 210°C

Maximum Working
Pressure: 18 bar



Male Steel Zinc Plated

0108	Thread	To Suit Hose ID mm	Wall Thickness mm
DAK12-13ST	1/2"	13	6
DAK34-19ST	3/4"	19	7
DAK10-25ST	1"	25	7.5
DAK15-38ST	1.1/2"	38	8



Male Brass

0108	Thread	To Suit Hose ID mm	Wall Thickness mm
DAK12-13MS	1/2"	13	6
DAK34-19MS	3/4"	19	7
DAK10-25MS	1"	25	7.5



Female Sealing Ring

0108	Size
DGI12	1/2"
DGI34	3/4"
DGI10	1"
DGI15	1.1/2"
DGI20	2"



Female Steel Zinc Plated

0108	Thread	To Suit Hose ID mm	Wall Thickness mm
DIK12-13ST	1/2"	13	6
DIK34-19ST	3/4"	19	7
DIK10-25ST	1"	25	7.5
DIK15-38ST	1.1/2"	38	8



Female Brass

0108	Thread	To Suit Hose ID mm	Wall Thickness mm
DIK12-13MS	1/2"	13	6
DIK34-19MS	3/4"	19	7
DIK15-38MS	1.1/2"	38	8

STEAM HOSE & ASSEMBLIES

Black Nylon Ply Steam Hose & Assemblies

- Manufactured to BS5122 Type A2 and ISO 6134



7 bar Hose, 20 Metre Coils

1370	ID mm	OD mm
BSH-3/4	19	31
BSH-1	25	39

° Maximum Working Temperature with Steam:
+170°C



7 bar Assemblies, 20 Metre Coils

1370	ID mm	OD mm
BSHA-3/4	19	31

Red Steel Reinforced Steam Hose & Assemblies

- Manufactured to BS5342 Type 2A

° Maximum Working Temperature with Steam:
+232°C



17 bar Hose, 20 Metre Coils

1370	ID mm	OD mm
RSH-3/4	19	32
RSH-1	25	38