

Mobile Hotspot User Manual



1

Getting Started

Overview
Components
Device Display
Battery Management

Overview

Thank you for choosing your LTE Mobile Hotspot.


Having the Mobile Hotspot at your fingertips will allow you to access LTE network for fast uploads and downloads. You can also connect up to 15 Wi-Fi capable devices to the Internet at once - laptops, tablets, eReaders, Smartphones and possible to tether through USB cable.

System Requirements

- Compatible with all IEEE802.11 b/g/n/ac Wi-Fi enabled devices.
- USB Type C cable with tethering connection through Windows PC or Mac.
- Works with the latest versions of most browsers*.


** It is recommended to use the latest versions of Internet browsers. Outdated versions may not be compatible with the Mobile Hotspot Web Admin User Interface, <http://mobile.hotspot>*

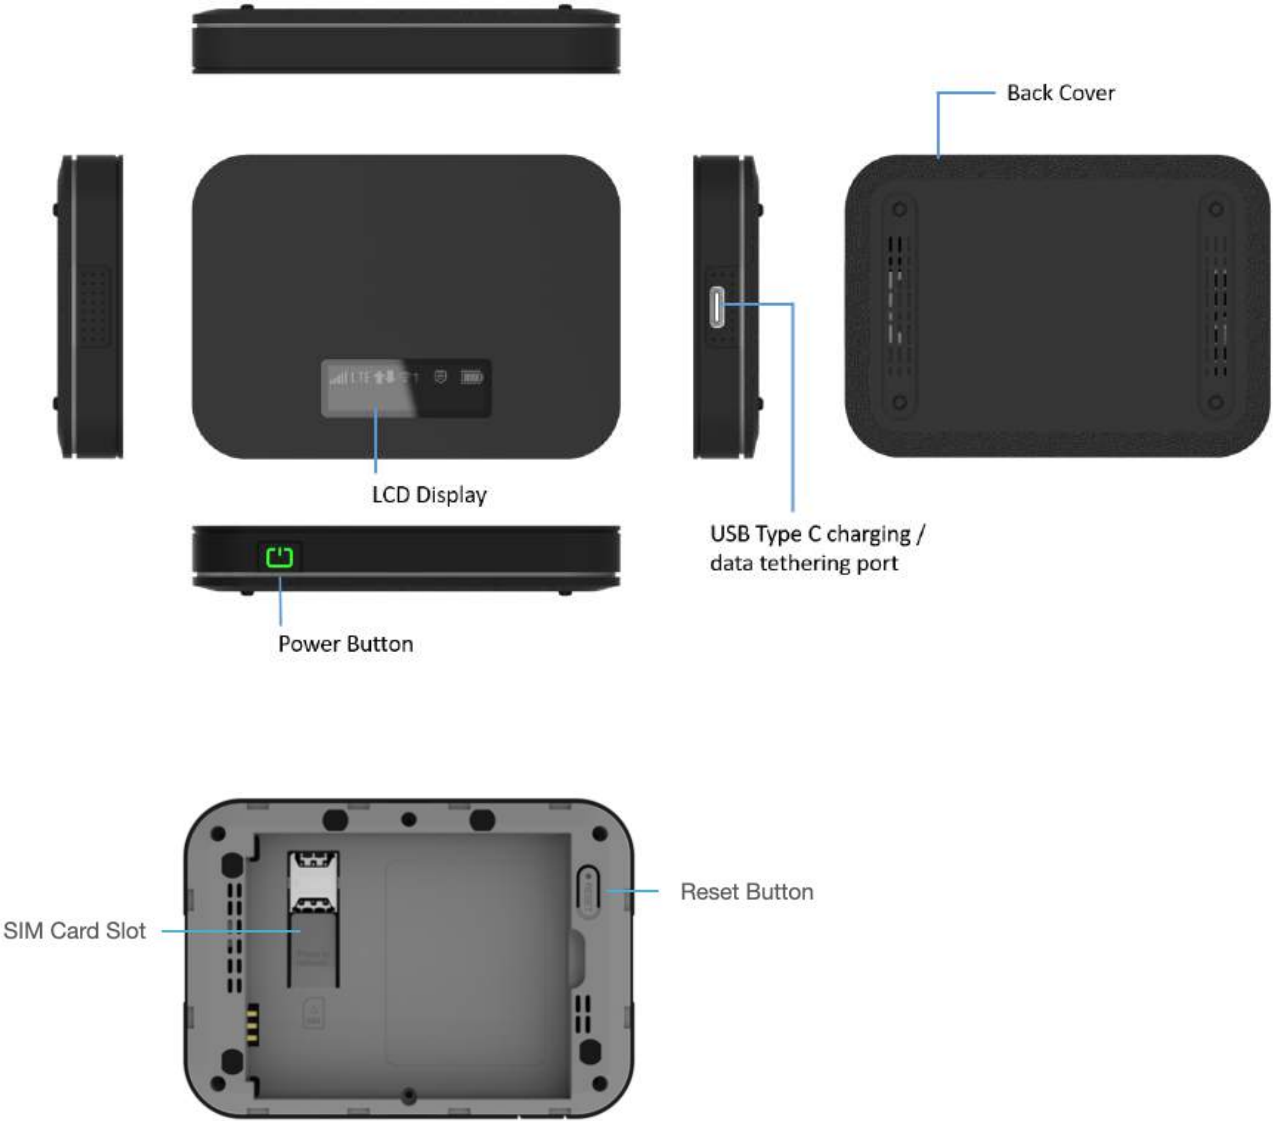


Components



Power/Menu Button – Turn on/off Mobile Hotspot. Shows device menu and information

Button Operation

	Operations	Actions
	Turn On	Press and hold the button for 3 seconds.
	Turn Off	Press and hold the button until “Goodbye” message appears.
	Display Wake-Up	When the display is off (sleep mode), the first quick press of the button wakes up the display.
	Info Display	When the display is on, press the button quickly to go through the device menu and information.

	Colors	Charging Status
	Off	Power off.
	Solid	Power off and connected to a charger.
	Blinking	Power on / Operating normally

LCD Display – Provides device status information such as battery, service signal strength, the number of users connected with Wi-Fi etc.

USB Type C Charging / Data Port – The USB charger connects here or USB connection for tethering.







SIM Card Slot – SIM Slot for Nano SIM card. Press down the plastic flap for SIM removal

Battery contact – Insert the battery to align with the battery contacts.

Reset Button – Long press the Reset button while device is turned on. Device will automatically reboot when reset is completed. During this process, battery should not fall out which may brick the firmware.

Device Display




Icons	Description
	4 level signal strength indicators. More bars indicate a stronger signal.
	Networks icon appears depends on which networks connected. (LTE / 3G / Roaming)
	Appears when data is being transmitted between the mobile network and your hotspot.
	Shows the number of connected devices. (1~14 and Max).
	Appears when you have unread messages.
	The bar inside the battery indicates the battery level. When battery power is low, the battery outline blinks.

Battery Management

Your Mobile Hotspot is equipped with a replaceable and rechargeable battery. It works from its charged battery alone, or when the device is plugged into a power source.



Note: Please do not attempt to open or disassemble your hotspot and the battery pack. Doing so may cause damage that voids your warranty. Charge the battery with the charger provided together with your hotspot. While the battery is charging, the battery charging icon  displays.

IMPORTANT! Please use only an approved charger to charge your hotspot. Improper handling of the charging port, as well as the use of an incompatible charger, may cause damage to your device and void the warranty.

2

Using Your Mobile Hotspot

Accessing the Network
Using Your Mobile Hotspot for the First Time
Connecting to Your Mobile Hotspot
Using Your Mobile Hotspot After Setup is Complete

Accessing the Network

Work effectively outside the home or office with the reliable broadband speed that the LTE service provides. You can connect to the internet at speeds fast enough to keep up-to-date on all your email correspondence, download attachments, and access your corporate intranet.

Using Your Mobile Hotspot for the First Time

System Requirements

Your computer, tablet, or other wireless devices need Wi-Fi capability and Internet browser software only. Your Mobile Hotspot is compatible with most major operating systems and the latest versions of browsers.

Instruction how to insert SIM card safely

Your SIM (Subscriber Identity Module) card is already pre-inserted in the device. Spare part of SIM card is present in the original packaging box for ease of activation. Device is only capable of inserting Nano SIM card.

Instruction how to remove SIM card safely

Your SIM (Subscriber Identity Module) card is already pre-inserted in the device. If you wish to remove the SIM, please press down the plastic flap where letters are written and slide out the SIM card safely.

IMPORTANT! Do not bend or scratch your Nano SIM card. Avoid exposing your Nano SIM card to static electricity, water, or dirt. Whenever you insert or remove the SIM card, ensure your Mobile Hotspot is powered off and is not connected to any power source. Never use tools, knives, keys, or any type of object to force to remove the Nano SIM card.

Charging the Battery

Before using your mobile hotspot, ensure that the battery is fully charged. Be sure to use the charger that came with your device.


NOTE: Your Mobile Hotspot is equipped with a replaceable rechargeable battery. When handling the battery or SIM card, please make sure the device is not connected to any power sources. Do not use any tools, sharp objects or any utensils when dealing with the battery. Doing so may cause damage that voids your warranty.

- It normally takes 3~5 hours, depending your power sources and device status to fully charge the battery.
- The battery discharges faster as additional devices connect to your hotspot.
- Battery life depends on the network, signal strength, temperature, features, and active connection time.
- When charging, keep your device near room temperature.
- Never leave the Mobile Hotspot in an unattended vehicle due to uncontrolled temperatures that may be outside the desired temperatures for your device.
- It is normal for batteries to gradually wear down and require longer charging time.

Connecting to Your Mobile Hotspot

Wi-Fi Name (SSID) and Password


You can find your Wi-Fi Name and Password any time you need. Just press the power/menu

button () shortly when the display is on.



Press  quickly

Home screen, Device menu guide
(Switching every 3 seconds)



Press  quickly

Data usage display



Press  quickly

Wi-Fi Name display



Press  quickly

Password display



Press  quickly

Web UI URL Guide display



Press  quickly

Back to Home screen

Connecting to the Internet

1. Open the setting application or controls on your laptop or Wi-Fi capable device that you want to connect to your Mobile Hotspot. Then find your Mobile Hotspot's Wi-Fi name. 2. Click **Connect** and enter the Password when prompted.

NOTE: The last four characters of your Wi-Fi Name is unique for your Mobile Hotspot.

Using Your Mobile Hotspot after Setup is Complete

Mobile Hotspot to share connections

You can use your Mobile Hotspot as a wireless mobile hotspot to connect to a total of 15 Wi-Fi capable devices to the mobile broadband network.