



TWIST-ON KEYSTONE JACK, Cat6 QUICK START GUIDE

Thank you for your purchase of this INTELLINET NETWORK SOLUTIONS™ Cat6 Twist-On Keystone Jack.

Follow the steps on this quick start guide for easy installation and use of both the fully shielded twisted pair (FTP) and the unshielded twisted pair (UTP) versions of this product, both of which can be installed without the need for a punch-down tool.

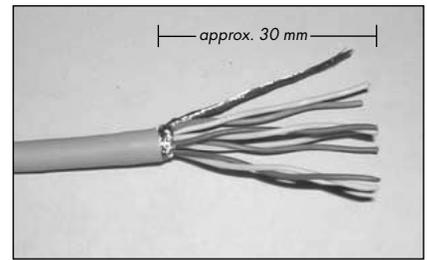


1. Strip away approx. 30 mm of the cable jacket. Separate the wires into four pairs while isolating the ground wire.




Pin number and color references



T568A	T568B
PIN 5 WHITE/BLUE	PIN 5 WHITE/BLUE
PIN 4 BLUE	PIN 4 BLUE
PIN 1 WHITE/GREEN	PIN 1 WHITE/ORANGE
PIN 2 GREEN	PIN 2 ORANGE
PIN 3 WHITE/ORANGE	PIN 3 WHITE/GREEN
PIN 6 ORANGE	PIN 6 GREEN
PIN 7 WHITE/BROWN	PIN 7 WHITE/BROWN
PIN 8 BROWN	PIN 8 BROWN

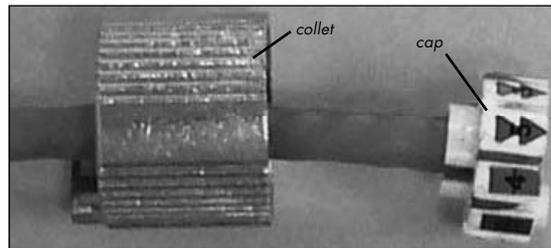

2. Place the threaded metal collet on the cable. Referring to the color-code chart at left, insert the wires into their corresponding wire slots on the cap. Pull the grounding wire back toward the collet as the cable is inserted in the cap.

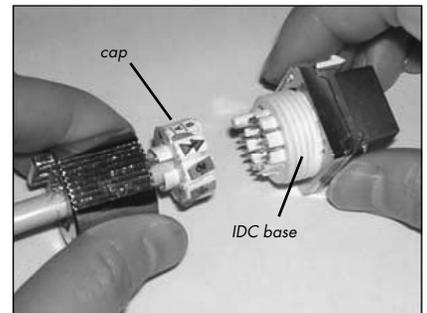




3. Connect the cap with the IDC base, using the guidepost for proper alignment.

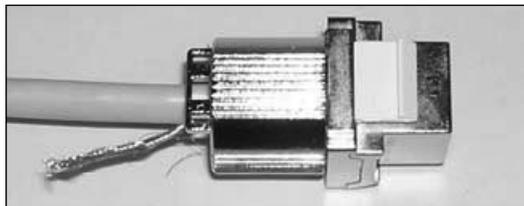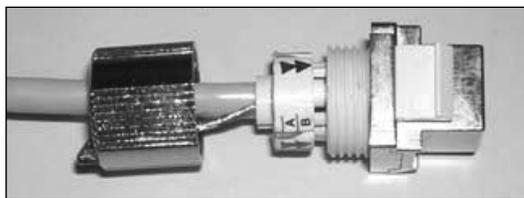

4. Sliding it over the grounding wire, position the collet over the cap and screw it onto the IDC base. Tighten the collet by hand, making sure the grounding wire protrudes from the back of the collet as shown at left-bottom.



NOTE: The optional tightening tool (included in 50-pc. cartons) can be used as shown.



5. Run the grounding wire through the cable holder on the collet. Insert the cable tie through the cable holder, then around the cable and the grounding wire. Lightly tighten the cable tie to secure the cable and complete the installation.



www.intellinet-network.com

Are you completely satisfied with this product?
Please contact your INTELLINET NETWORK SOLUTIONS™ dealer with comments or questions.

Copyright © INTELLINET NETWORK SOLUTIONS
All products mentioned are trademarks or registered trademarks of their respective owners.