


## SPECIFICATIONS

## 4 Zone RGB LED Bluetooth Sync Controller, 6-24VDC

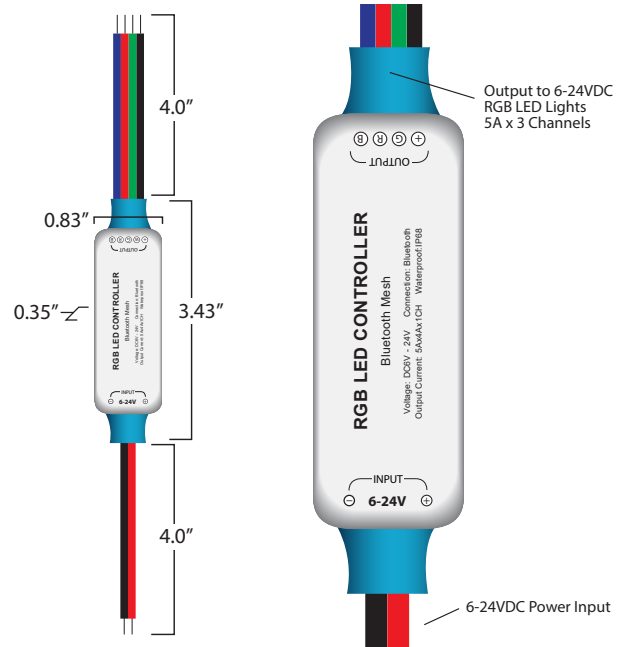

<b>PRODUCT NAME</b>	4 Zone RGB LED Bluetooth Sync Controller, 6-24VDC 5A x 3CH
<b>SKU</b>	No Clock Function: <b>LC-LF-RGB-BTS</b> With Clock Function: <b>LC-LF-RGB-BTT</b>
<b>PRODUCT URL</b>	No Clock Function: <a href="#">Click Here</a> With Clock Function: <a href="#">Click Here</a>
<b>DESCRIPTION</b>	The newly redesigned IP68 mini Bluetooth RGB LED time controller has the ability to sync numerous controllers over 4 zone groups using the free 'Light Mesh' app on an iOS or android device. From the smart phone app you can pair to multiple devices, set up groups, save colors and scenes, <u>as well as trigger scenes using a real time clock with repeating weekday options (BTT model only)</u> . From the main app control you can choose from millions of static RGB color choices as well as 42 pre programmed color functions with 99 speed level adjustments. The RGB output can control a max load of 5 amps x 3 channels, 180W using 12VDC or 360W using 24VDC. There are 16 storage spaces to save your favorite custom colors and 16 storage spaces for quick access to your favorite color changing modes. This product is IP68 waterproof rated but not meant to be submersed in water or directly exposed to any outdoor elements.
<b>INPUT POWER</b>	6-24VDC constant voltage
<b>CONNECTION TYPE</b>	4 Wire RGB Common Anode (+)
<b>OUTPUT CURRENT</b>	5A x 3 Channels
<b>OUTPUT POWER</b>	12VDC - 180 Watts / 24VDC - 360 Watts
<b>OPERATING TEMP</b>	-22° ~ 160°F
<b>RATING</b>	IP68 Waterproof
<b>WARRANTY</b>	1 year manufacturers

These specification are subject to change without notice. This specification information is from the manufacturer of this product. Ecolocity LED is not the manufacturer of this product.  
Copyright © 2018 Ecolocity LED