



ITEM#:CLF1028A SIZE:φ52"X52*13"

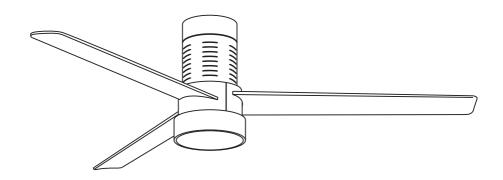


Table of Contents

| re-Installation | | |
|-----------------|------|--|
| eling | | |

Safety Information

- To reduce the risk or electrical shock the electricity has been turned off at the circuit breaker or fuse box before begin.
- All wiring must be in accordance with the National Electrical Code NASI/NFPA 70 -1999 and local electrical codes. Electrical installion should be performed by a qualified licensed electrician.
- The outlet box and support structure must be securely mounted and capable of reliably supporting 35ib.(15.9kg). Use only UL listed outlet boxes marked "Acceptable for Fan Support of 35ibs(15.9kg)or less."
- 4. The fan must be mounted with a minimum of 7 ft. (2m) clearance from the trailing edge of the blades to the floor.
- 5. Do not operate the reversing switch while the fan blades are in motion. You must turn the fan off and stop the blades before you reverse the blade direction.
- 6. Do not place objects in the path of the blades.
- To avoid personal injury or damage to the fan and other items use caution when working around or cleaning the fan.
- 8. Electrical diagrams are for reference only. Light kits that are not packed with the fan must be UL-listed and marked suitable for use with the model fan you are installing. Switches must be UL General Use Switches. Refer to the instructions packaged with the light kits and switches for proper assembly.
- After making electrical connections, spliced conductors should be turned upward and pushed carefully up into the outlet box. The wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box.
- All setscrews must be checked and retightened where necessary before installation.



WARNING: TO reduce the risk of personal injury, do not bend the blade brackets (also referred to as flanges) during assembly or after installation. Do not insert objects in the path of the blades.



WARNING: Remove the rubber motor stops on the bottom of the fan before installing the blades or testing the motor.



WARNING: To reduce the risk or fire or electric shock, do not use this fan with any solid-state speed control device.



WARNING:To avoid possible electrical shock, turn the electricity off at the main fuse box before wiring. It you feel you do not have enough electrical wiring knowledge or experience, contact a licensed electrician.



WARNING: Electrical diagrams are for reference only. Optional use of any light kit shall be UL-listed and marked suitable for use with this fan.



WARNING: To reduce the risk of fire, electric shock, or personal injury. mount to outlet box marked "Acceptable for fan support of 35 ibs.(15.9 kg)or less." and use the screws provided with the outlet

Warranty

The supplier warrants the fan motor to be free from defects in workmanship and material present at time of shipment from the factory for a lifetime after the date of purchase by the original purchaser. The supplier also warrants that all other fan parts, excluding any glass or acrylic blades, to be free feom defects in workmanship and material at the time of shipment from the factory for a period of one year after the date of purchase by the original purchaser. We agree to correct such defects without charge or at our option replace with a comparable or superior model if the product is returned. To obtain warranty service, you must present a copy of the receipt s proof of purchase. All costs of removing and reinstalling the product are your responsibility. Damage to any part, such as by accident, misuse, improper installation or by affixing any accessories, is not covered by this warranty. Because of varrying climatic conditions this warranty does not cover any changes in brass finish, including rusting, pitting, corroding, tarnishing.or peeling. Brass finish of this type give their longest useful life when protected from varying weather conditions. A certain amount of "wobble" is normal and should not be consided a defect. Servicing performed by unauthorized persons shall render the warranty invalid. There is no other sxpress warranty. hereby di sclaims any and all warranties, including but not limited to those of merchantability and fitness for a particular purpose to the extent permitted by law. The duration of any impiled warranty which cannot be disclaimed is limited to the time period as specified in the sxpress warranty. Some states do not allow a limitation on how long an implied warranty lasts, so the above limitation may not apply to you. The retailer shall not be liable for incidental, consequental, or special damages arising out of or in connection with product use or perforance except as may otherwise be accorded by law. Some states do not allow the exclusion of incidrntal or consequential damages, so the above exclusion or limitation may not apply to you. This warranty gives specific legal rights, and you may also have other rights which vary from state to state. This warranty supersedes all prior warranties. Shipping costs for any return of products as part of a claim on the warranty must be paid by the customer.

Pre-Installation

TOOLS REQUIRED




Pre-Installation(continued)


HARDWARE INCLUDED components table




| 凹 | NOTE: Hardware not shown to actual size. | | | |
|----|--|---|--|--|
| AA | Blade attachment screw and fiber washer (preassembled) | | | |
| ВВ | Light kit mounting screw(preassembled) | 3 | | |
| СС | Balanced parts package | 1 | | |
| DD | Mounting screws | 4 | | |
| EE | Expansion Bolts | 2 | | |
| FF | Lock washer(preassembled) | 1 | | |
| GG | Plastic wire nut(not to scale) | 5 | | |

PACKAGE CONTENTS

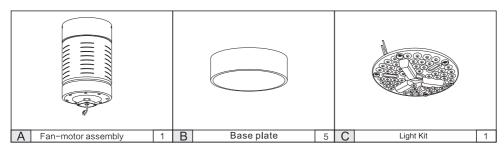


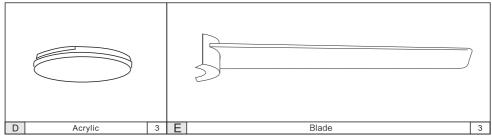


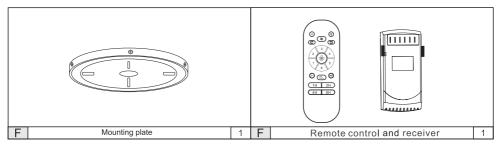


Assembly – Attaching the Fan Blades

1.Attaching the blades








- 1. Remove the motor from the motor cover, keep the screws.
- 2. Install the Blade into the motor and tighten the screws.
- 3. Re-install the motor cover and tighten the screws again.

Assembly - Attaching the Lights

1. Install the base plate



CAUTION:To reduce the risk of electric shock, disconnect the electrical circuit to the fa before installing the light fixture.




Assembly – Attaching the Lights

1. Install the light kit




CAUTION:To reduce the risk of electric shock, disconnect the electrical circuit to the fa before installing the light fixture.




- 1. Connect the wires
- 2. Adsorb the magnet on the LED light kit into the lamp pan
- 3.Rotate the lampshade in the direction indicated by the arrow and install it on the lampshade

Assembly - Attaching the Lights

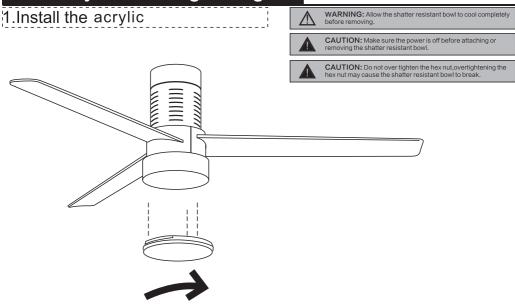


Assembly – Hanging the Fan

1.install the fan




Hang motor assembly onto the hook on mounting plate for hands-free wiring and safety cable installation.

Remote control wiring diagram

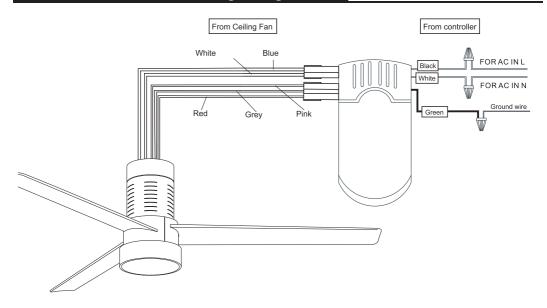

Assembly – Hanging the Fan


1.install the fan



Lift motor assembly, aligning the keyhole slots with the preassembled screws on mounting plate, and twist clockwise till lock. Tighten all screws securely.



Use of remote control

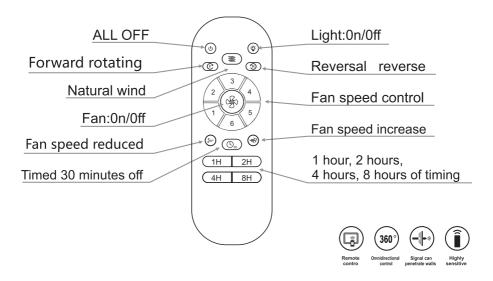

Batteries not included Please use 2PCS 1.5V AAA battery for remote

Operation

OPERATING YOUR FAN

Turn on the power and check the operation of the fan. The remote controls the fan speed and light.

The appropriate speed settings for warm or cool weather depends on factors such as the room size.ceiling height, and number of fans.

The switch (controls the direction of the blades: forward or reverse



NOTE: Wait for the fan to stop before reversing the direction of the blade rotation

A. Warm weather-(Forward) A downward airflow creates a cooling effect. This allows you to set your air conditioner on a highter setting without affecting your comfort.


B.Cool weather-(Forward) An upward airflow moves warm air off of the ceiling. This allows you to set your heating unit on a lowering setting without affecting your comfort.






A.Warm Weather (summertime)






B.Cool Weather (wintertime)


(12) Fans Balance



Put the clip in the center of a blade. turn on the fan and if the shake persists, put the clip in another blade until the shake is reduced. Then this blade will need the counterweight.



Place the clip on the blade that needs the counterweight and try the best place to place it, from the center to the tip of the blade, until the wobble disappears.



Paste the counterweight on the surface of the blade which near the clip, remove the clip and test the fan. If it keep staggering, put another counterweight. if it gets worse, try another better area to place it. please try it patiently till the fan is balance.

Care and Cleaning




WARNING: Make sure the power is off before cleaning your fan.

- ☐ Because of the fan's natural movement, some connections may become loose. Check the support connections, brackets, and blade attachments twice a year. Make sure they are secure. It is not necessary to remove the fan from the celling.
- □ Clean your fan periodically to help maintain its new appearance over the years. Do not use water when cleaning, as this could damage the motor or the wood, or possibly cause an electrical shock. Use only a soft brush or lint–free cloth to avoid scratching the finish. The plathing is sealed with a lacquer to minimize discoloration or tarnishing.
- □ You can apply a light coat of furniture polish to the wood for additional protection and enhanced beauty. Cover small scratches with a light application of shoe polish.
- ☐ You do not need to oil your fan. The motor has permanently-lubricated sealed ball bearings.

Troubleshooting

| Problem | Solution |
|--------------------------|---|
| The fan willn not start. | ☐ Check the main and branch circuit fuses or breakers. ☐ Check the line wire connections to the fan and switch wire connections in the switch housing. |
| The fan willn not start. | □ Ensure all motor housing screws are snug. □ Ensure the screws that attach the fan blade bracket to the motor hub are tight. □ Ensure the wire nut connetions are not ratting against each other or the interior wall of the switch housing. □ Allow a 24-hour "breaking in" period. Most noises associated with a new fan disappear during this time. □ If you are using the Ceilling Fan light kit, ensure the screws securing the glassware are tight. Check that the light □ bulbs are also secure. □ Ensure the canopy is a short distance from the ceiling. □ Ensure your outlet box is secure and rubber isolator pads wereused between the mounting plate and outlet box. |
| The fan wobbles. | □ Check that all blade and blade arm screws are secure. □ Most fan wobble problems are caused when blade levels are unequal. Check this level by selecting a point on the □ ceiling above the tip of one of the blades. Measure from a point on the center of each blade to the point on the □ ceiling. Measure this distance. Rotate the fan until the next blade is positioned for measurement. Repeat for each □ blade. Any measurement deviation should be within 1/8 in. Run the fan for ten minutes. If the fan continues to □ wobble please contact Customer Service and a balancing kit will be sent to you a |

Remote control fan

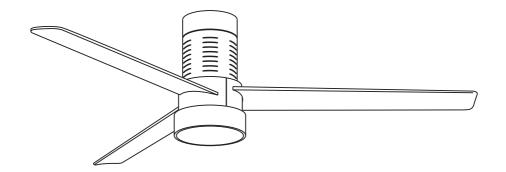

USE AND CARE GUIDE

52-INCH CEILING FAN