

WARNING

- * Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- * Inspect item carefully before attempting to install.
- * If there is any damages or obvious defects, do not install.
- * Item may not be returned once it has been installed.



CARE AND MAINTENANCE

- * To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- * To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- * Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

NOTICE& IMPORTANT SAFETY INSTRUCTIONS

- ** WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN **
- * Please make sure that you have all parts indicated before you begin assembly of this item
- * This item should be assembled on a soft surface to prevent scratching the finish during assembly
- * To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation
- *The external flexible cable or cord of this lamp cannot be replaced
If the cord is damaged, the lamp shall be destroyed

Part List and Hardware List


PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	bracket		1X	H	Short Stem		1X
B	machine screw		2X	I	Long Stem		2X
C	Canopy Nut		2X	J	Light Body		1X
D	Wire Connector		3X	K	lamp shade		1X
E	Canopy Nut		2X	L	lamp shade		6X
F	Ground Screw		1X	M	lamp cup		6X
G	Canopy		1X	N	Bulb		6X

SAFAVIEH

COUTURE

Model#: CTL1052


Product Dimensions: 43"DX43"W X
24.75"-54.75"H

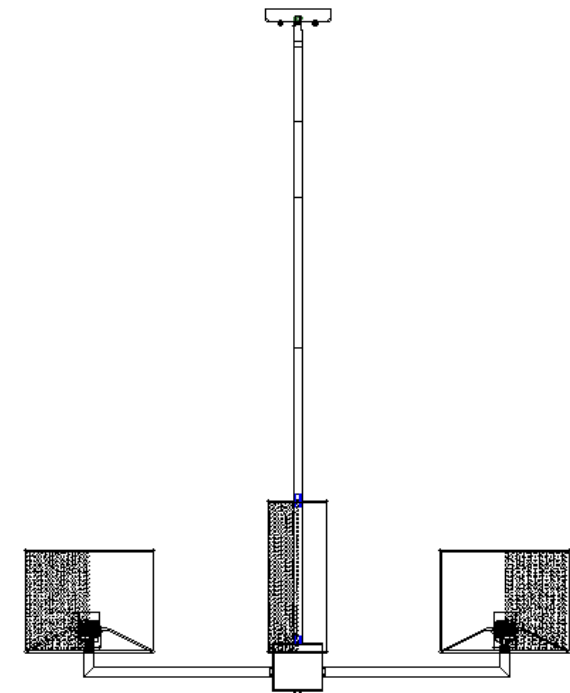


PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

NOTE: PLEASE USE DIMMABLE TYPE "A" BULB MAX 40-WATT OR MAX 9-WATT THERE ARE 6PCS LED 4-WATT BULB IN THE BOX

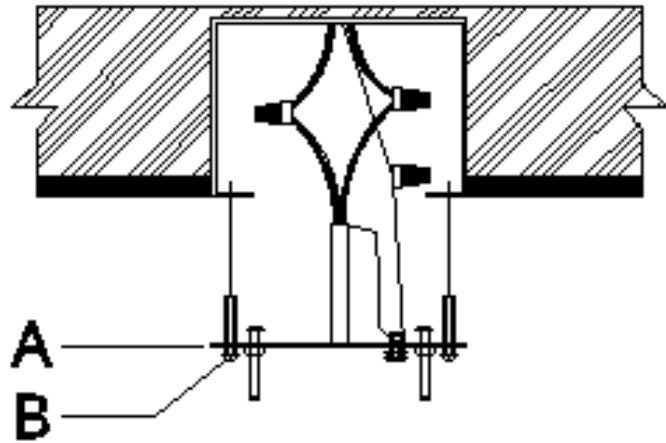


Step 1: Unpack all parts from cartons carefully. Fix the Mounting Plate (A) to the junction box with Mounting screw (B).

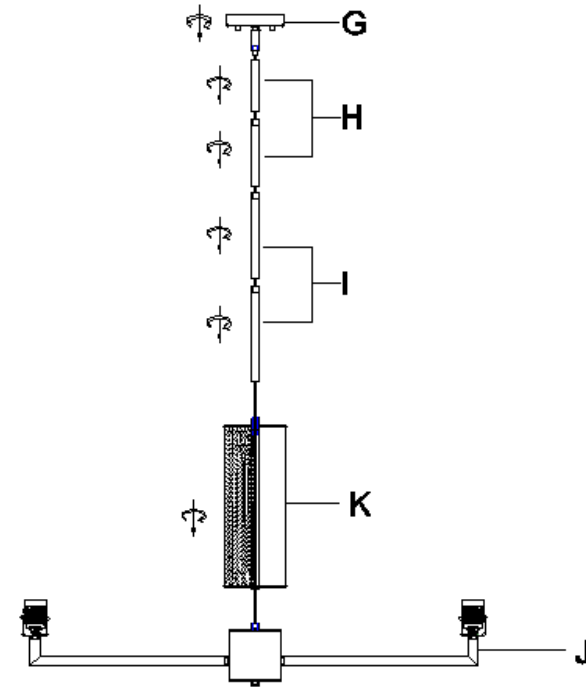

Step 2: Screw the lampshade (K) onto the lamp body (J), and then screw the long rod (I) and short rod (H) onto the lampshade (K). Ensure that the branch line of the fixture passes through the rod during the assembly process. Remove or add rods to adjust height. Then screw the canopy (G) onto the rod.

PREPARATION

- * Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- * If any part is missing or damaged, do not attempt to assemble the product.
- * Estimated Assembly Time: 20 minutes.
- * Tools Required for Assembly (not included): Screwdriver, Junction box
- * If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com

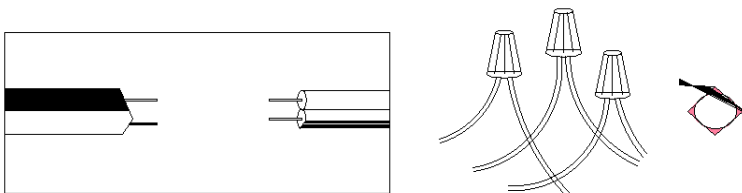

Step 3: Wire connection


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.


CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:


Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

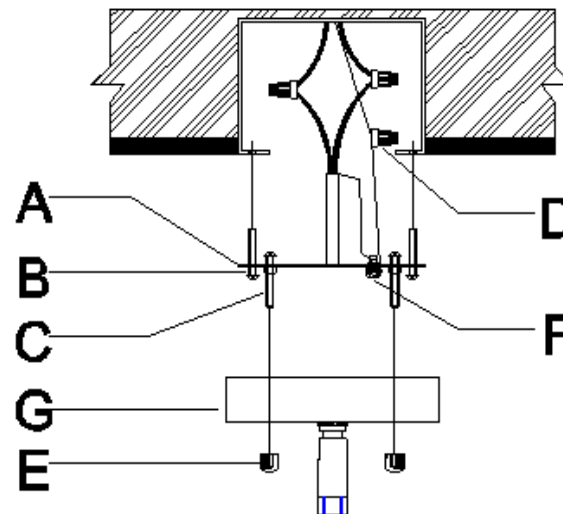

Step 4: Attach the Canopy (G) to the Mounting Plate (A), and fix it by turning the Canopy Nut (E) anti clockwise.



Step 5: Fix the lampshade (L) onto the lamp holder using the lamp holder ring (M).



Step 6: Install the light bulb (N) onto the lamp holder.