1 FRONT - SOUTH ELEVATION
3/16" = 1'-0"

CLASS (I) MATERIALS:		CLASS (II) MATERIALS:		CLASS (III) MATERIALS:	
CULTURED STONE =	36.1%	BRICK =	32.6%	SPANDREL =	2.0%
	36.1 x 8 = 288.8	GLASS =	24.7%		2.0 x 2 = 4.0
		METAL =	4.5%		
			61.8 x 6 = 370.8		(288.8+ 370.8 + 4.0)/200 = 3.31 > 3

MATERIAL CALCS - SIDE SOUTH ELEVATION:
BRICK - 580 SQFT
CULTURED STONE - 641 SQFT
CLEAR GLAZING - 439 SQFT
SPANDREL GLASS - 37 SQFT
SUNSHADE - 81 SQFT

TOTAL BUILDING ELEVATION SF - 1,775 SQFT

2 FRONT - NORTH ELEVATION
3/16" = 1'-0"

CLASS (I) MATERIALS:		CLASS (II) MATERIALS:		CLASS (III) MATERIALS:	
CULTURED STONE =	42.2%	BRICK =	45.1%	SPANDREL=	7.5%
	42.2 x 8 = 337.6	GLASS =	2.5%		7.5 x 2 = 15.0
		METAL =	2.5%		
			50.1 x 6 = 300.6		(337.6+ 300.6+ 15.0)/200 = 3.26 > 3.25

MATERIAL CALCS - FRONT NORTH ELEVATION:
BRICK - 834 SQFT
CULTURED STONE - 780 SQFT
CLEAR GLAZING - 47 SQFT
SPANDREL GLASS - 139 SQFT
SUNSHADE - 48 SQFT

TOTAL BUILDING ELEVATION SF - 1,848 SQFT

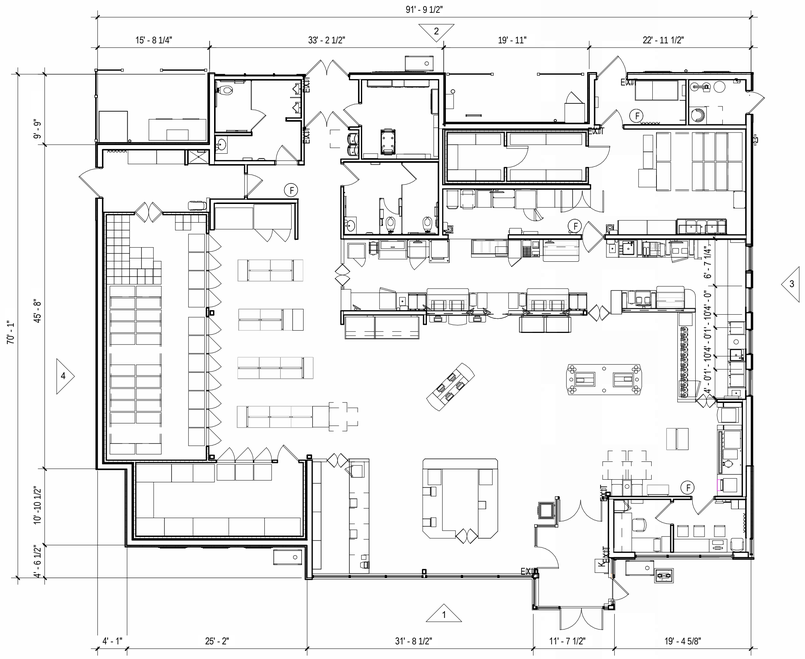

5 FLOOR PLAN
1" = 10'-0"

MATERIALS:

EXTERIOR FINISH PACKAGE: CULTURED STONE

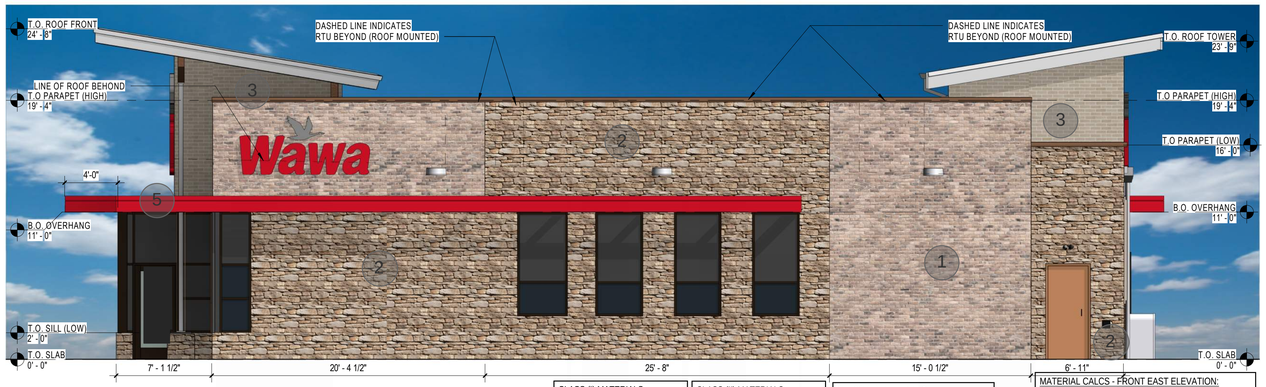

3 FRONT - EAST ELEVATION
3/16" = 1'-0"

CLASS (I) MATERIALS:		CLASS (II) MATERIALS:		CLASS (III) MATERIALS:	
CULTURED STONE =	47.8%	BRICK =	32.1%	SPANDREL=	3.6%
	47.8 x 8 = 382.4	GLASS =	11.7%		3.6 x 2 = 7.2
		METAL =	4.6%		
			48.4 x 6 = 290.4		(382.4+ 290.4 + 7.2)/200 = 3.4 > 3.25

MATERIAL CALCS - FRONT EAST ELEVATION:
BRICK - 441 SQFT
CULTURED STONE - 656 SQFT
CLEAR GLAZING - 161 SQFT
SPANDREL GLASS - 50 SQFT
SUNSHADE - 64 SQFT

TOTAL BUILDING ELEVATION SF - 1,372 SQFT

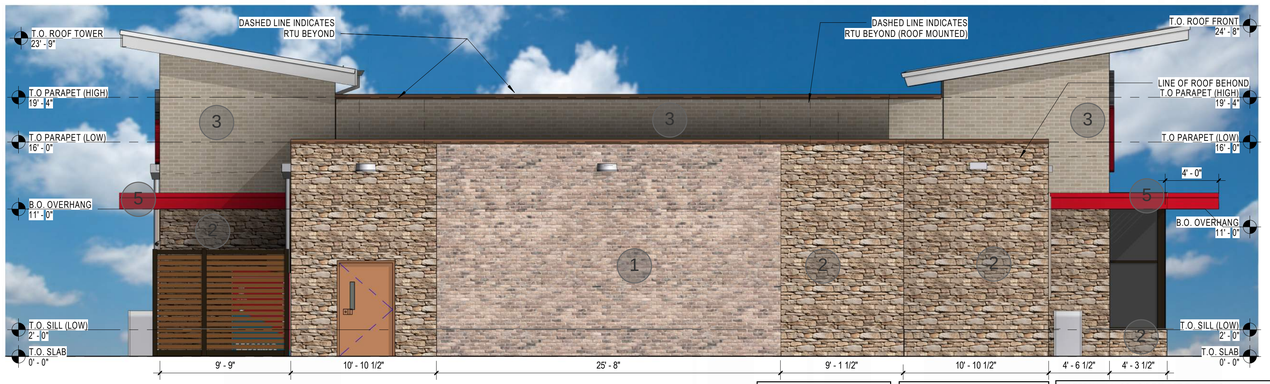

4 SIDE - WEST ELEVATION
3/16" = 1'-0"

CLASS (I) MATERIALS:		CLASS (II) MATERIALS:	
CULTURED STONE =	44.6%	GLASS =	2.6%
	44.6 x 8 = 356.8	BRICK=	50.3%
		METAL =	2.3%
			55.2 x 6 = 331.2
			(356.8 + 331.2)/200 = 3.44 > 3

MATERIAL CALCS - SIDE WEST ELEVATION:
CULTURED STONE - 627 SQFT
BRICK - 706 SQFT
CLEAR GLAZING - 37 SQFT
SUNSHADE - 33 SQFT

TOTAL BUILDING ELEVATION SF - 1,403 SQFT

HFA

WAWA U59FB-L

HWY 267 & CAMBY RD
PLAINFIELD, IN

Wawa