# **WARNING**

- \* Switch off the main electrical supply from the main fuse box / circuit breaker before installation.
- \* Inspect item carefully before attempting to install.
- \* If there is any damages or obvious defects, do not install.
- \* Item may not be returned once it has been installed.

### **CARE AND MAINTENANCE**

- \* To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.
- \* To clean the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.
- \* Do not use any cleaners with chemical, solvents or harsh abrasives. Use only a dry soft cloth to dust or wipe carefully.

### **NOTICE& IMPORTANT SAFETY INSTRUCTIONS**

- \*\* WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN \*\*
- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* To reduce the risk of fire, electrical shock or injury to persons or property, please follow the guideline below for safe use and installation


#### Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
А	Wire Nut		3X	E	lamp body		1X
В	Mounting Plate		1X	F	shade		1X
С	Mounting Screw	<b>J</b> 111111111	2X	G	socket ring		1X
D	Canopy Screw	<b>(333)</b>	2X	Н	Bulb		1X



Model#: SCN4105


Product Dimensions: 11.5"L x 8.5"W x 11"H




## **PREPARATION**

- \* Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list.
- \* If any part is missing or damaged, do not attempt to assemble the product.
- \* Estimated Assembly Time: 20 minutes.
- \* Tools Required for Assembly (not included): Screwdriver, Junction box
- \* If you are having difficulty, our friendly Customer Care team is always here to help. Please email customersupport@safavieh.com


# NOTE: PLEASE USE TYPE"A" BULB MAX 60-WATT OR LED BULB MAX 9-WATT, THERE IS 1PC LED 4-WATT BULB IN THE BOX

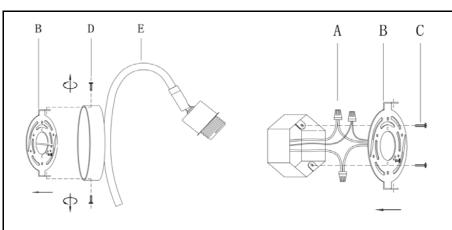

**Step 1:** Unpack all parts from cartons carefully. Separate Mounting Plate(B) from Canopy of the lamp body (E) by turning the Canopy Screw (D) counter-clockwise. Secure mounting plate (B) to outlet box with mounting screws (C).



**Step 3:** Attach lamp body (E) to Mounting plate (B) and secure with Canopy Screw (D).





**Step 2: Wire connection** 


Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.

Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections

Grounding Instructions:

Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire nut.



**Step 4:** Separate Socket Ring (G) from Socket by turning counter-clockwise. Place shade (F) onto Socket by turning the Socket Ring (G) clockwise. Insert bulb (H) into the Socket.