
# 8' INSTRUCTOR DESK

1114, 1114F, 1116, & 1116F SERIES ASSEMBLY INSTRUCTIONS

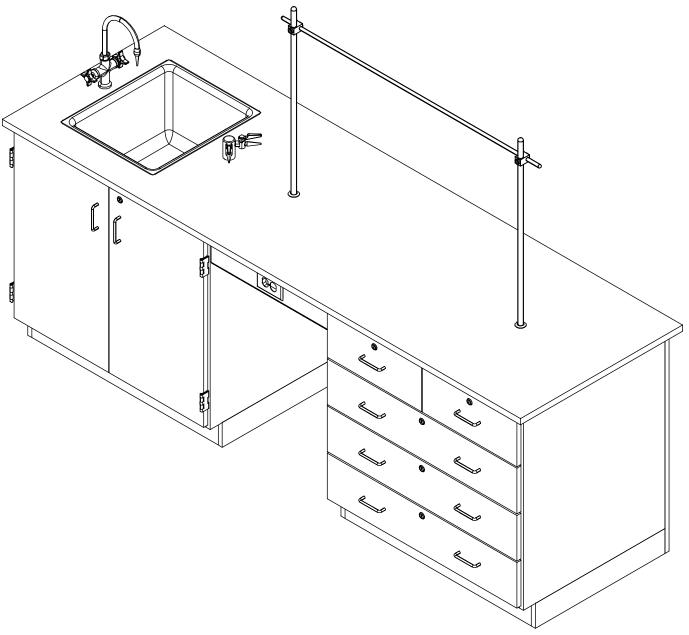

#### NOTE:

1. MODEL VIEWS MAY NOT REPRESENT EXACT MODEL PURCHASED

С	UPDATED SILICONE PROCEDURE	8/15/23	RJM	-	
Α	CREATED DRAWING	11/8/16	EMR	-	
REV.	DESCRIPTION	DATE	NAME	ECN NO.	
REVISION LEVEL					

ALL DIMENSIONS ARE IN INCHES UNLESS NOTED OTHERWISE	DWN BY:	EMR	DATE DWN:	11/8/16
DECIMALS: .X = ± .030 .XX = ± .020 .XXX = ± .010	APR BY:		DATE APR:	
ANGLES: = $\pm 1^{\circ}0'$ CABINET SQUARENESS = $\pm .0625$	APR BY:		DATE APR:	

CONFIDENTIAL:

ALL DESIGN RIGHTS RESERVED

THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

RAWING NUMBER:	SCALE:	SHEET:	REVISION
114 & 1114F, 1116 & 1116F	NTS	1 OF 14	REV C

ASSEMBLY TEMPLATE

# **TOOLS REQUIRED CONTACT CEMENT SCREW DRIVER** C-CLAMPS SHIM STOCK (IF NEEDED)

AS:	SEMBLY C	COMPONENTS	
ITEMS INCLUDED	PART #	PART DESCRIPTION	QTY
TOP	VARIES	TOP, (STYLE VARIES), 1.00X30X96,BLK, (EITHER FIXTURE OR FLAT)	1
CABINET	N/A	B86 - 36"W X 35"H X 26.25"D	1
CABINET	N/A	B23 - 36"W X 35"H X 26.25"D	1
BACK PANEL	N/A	94"W X 35"H X 0.75"D	1
APRON	N/A	0.81"THK X 4.50"W X 22"L	1
SCREWS - BACK PANEL	100478	SCREW,#8X1 1/4 SQ. WASHER FLAT HEAD	12
L BRACKET	100355	BRACKET, RAIL 1.25X1.25X4.25	2
SCREWS - L BRACKET	100649	SCREW,#8X <sup>3</sup> / <sub>4</sub> PHIL TRUSS HEAD SMS	8
SILICONE	100711	SILICONE,SEALANT,CLEAR	1
RUBBER BASE MOLDING	100283	RUBBER BASE MOLDING (SOLD BY FOOT)	25
STAINLESS STEEL CORNERS	100057	CORNER-STAINLESS STEEL, BASE	8
SCREWS - BASE	100064	SCREW,#6X½ PTH SMS SS SCREW	32
ELECTRICAL BOX	100033	ELECTRICAL BOX 3.00X2X2.5 DEEP	1
ELECTRICAL OUTLET	100034	ELEC,OUTLET,GFI,20A 125V, BLK	1
**FIXTURE - FAUCET**	100048	FIXTURE,L4100FH-132AWSA 90 DEGREE-G	1
**FIXTURE - FAUCET**	100467	FIXTURE,L414 HOT & COLD MIXING	1
**FIXTURE - SINK**	100699	SINK,EPOXY L30,BLK	1
**FIXTURE - SINK TRAP**	100056	SINK TRAP,PLASTIC ADJUSTABLE	1
**FIXTURE - SINK OUTLET/STRAINER**	254047	SINK OUTLET TAIL PIECE/INTEGRAL STRAINER,BLK	1

#### NOTE:

- TOPS ARE EITHER PHENOLIC OR EPOXY.
- \*\*XX\*\* INDICATES ITEMS USED ONLY FOR UNITS WITH A SINK OR FIXTURES.

ALL DIMENSIONS ARE IN INCHES UNLESS NOTED OTHERWISE	DWN BY:	EMR	DATE DWN:	11/8/16
DECIMALS: .X = ± .030 .XX = ± .020 .XXX = ± .010	APR BY:		DATE APR:	
ANGLES: = ± 1°0'  CABINET SQUARENESS = ± .0625	APR BY:		DATE APR:	
CONFIDENTIAL: ALL DESIGN RIGHTS RESERVED THE INFORMATION, DATA, DES		AND DR	AWIN	GS EMBODIED

IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK TOOLS AND ASSEMBLY COMPONENTS

RAWING NUMBER:	SCALE:	SHEET:	REVISION
114 & 1114F, 1116 & 1116F	NTS	2 OF 14	REV (

С	UPDATED SILICONE PROCEDURE	8/15/23	RJM	-		
Α	CREATED DRAWING	11/8/16	EMR	-		
REV.	DESCRIPTION	DATE	NAME	ECN NO.		
REVISION LEVEL						

ASSEMBLY COMPONENTS							
ITEMS INCLUDED	PART #	PART DESCRIPTION	QTY				
**ROD SOCKET**	206505	ROD SOCKET ASSY,SOCKET,WASHER,NUT	2				
**CROSSBAR**	100006	ROD,CROSSBAR ¾ DIA.X48 L	1				
**UPRIGHT**	100004	ROD,UPRIGHT ¾ DIA.X36 L	2				
**CLAMP**	100002	ROD CLAMP 3/4 X 3/4 ASSY	2				

#### NOTE:

- 1. TOPS ARE EITHER PHENOLIC OR EPOXY.
- \*\*XX\*\* INDICATES ITEMS USED ONLY FOR UNITS WITH A SINK OR FIXTURES.

С	UPDATED SILICONE PROCEDURE	8/15/23	RJM	-		
Α	CREATED DRAWING	11/8/16	EMR	-		
REV.	DESCRIPTION	DATE	NAME	ECN NO.		
REVISION LEVEL						

	DWN BY:	EMR	DATE DWN:	11/8/16
DECIMALS: $.X = \pm .030$ $.XX = \pm .020$ $.XXX = \pm .010$	APR BY:		DATE APR:	
ANGLES: = $\pm 1^{\circ}0'$ CABINET SQUARENESS = $\pm .0625$	APR BY:		DATE APR:	

CONFIDENTIAL:
ALL DESIGN RIGHTS RESERVED
THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE
THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.


THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK TOOLS AND ASSEMBLY COMPONENTS

DRAWING NUMBER: REVISION: 1114 & 1114F, 1116 & 1116F NTS 3 OF 14 REV C

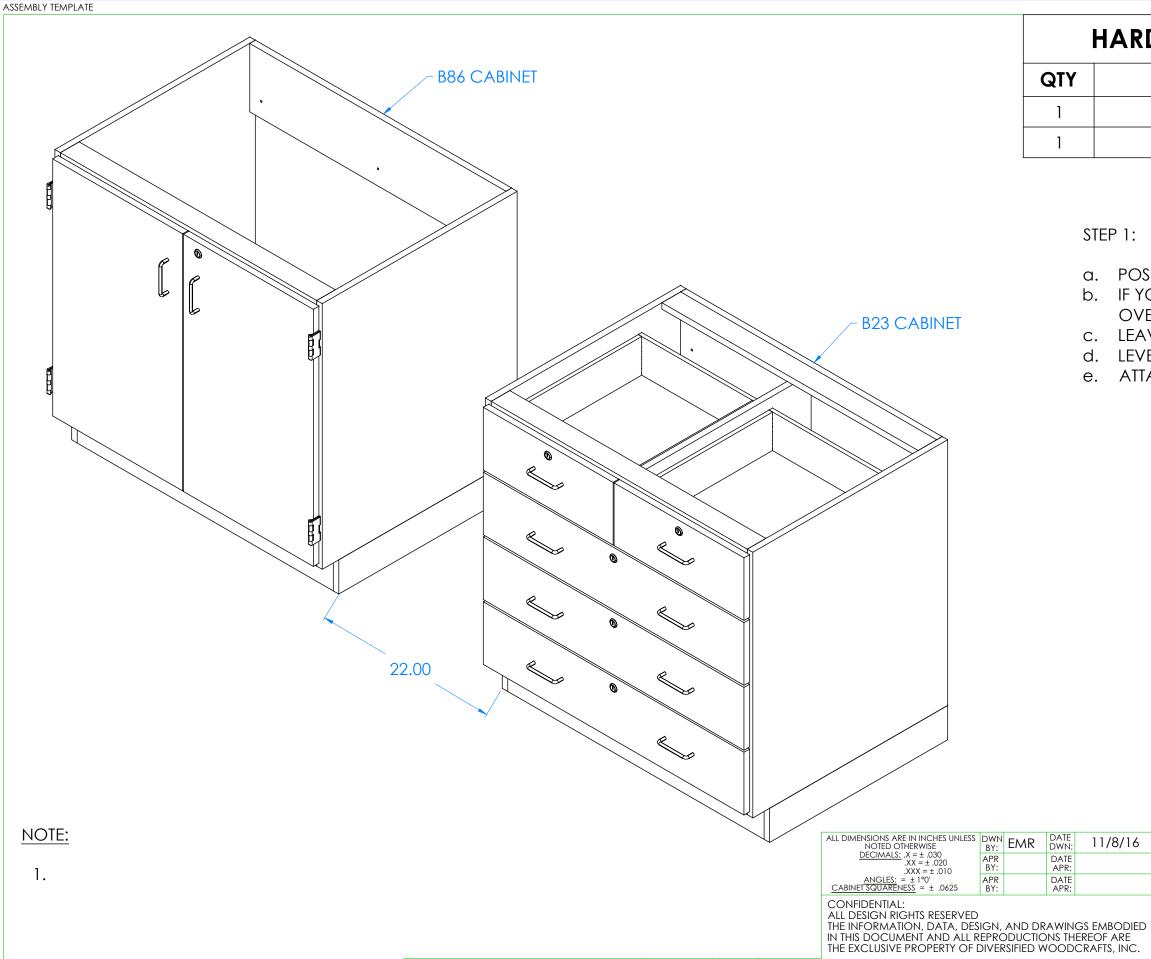

UPDATED SILICONE PROCEDURE

CREATED DRAWING

DESCRIPTION

Α

REV.

8/15/23

11/8/16

DATE

REVISION LEVEL

RJM

**EMR** 

NAME

ECN NO.

HARDWARE REQUIRED FOR STEP					
QTY	DESCRIPTION	PART NUMBER			
1	CABINET	N/A			
1	CABINET	N/A			

#### STEP 1:

- POSITION THE TWO CABINETS IN DESIRED LOCATION.
- b. IF YOU HAVE A UNIT WITH A SINK OR FIXTURES, PLACE UNIT OVER UTILITY HOOKUPS.
- C. LEAVE ENOUGH ROOM IN BETWEEN CABINETS FOR APRON.
- d. LEVEL CABINETS.
- e. ATTACH TO FLOOR.

	DWN BY:	<b>EMR</b>	DATE DWN:	11/8/16
ECIMALS: .X = ± .030 .XX = ± .020 .XXX = ± .010	APR BY:		DATE APR:	
ANGLES: = ± 1°0' SQUARENESS = ± .0625	APR BY:		DATE APR:	


THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

DRAWING NUMBER: 1114 & 1114F, 1116 & 1116F NTS 4 OF 14 REV C

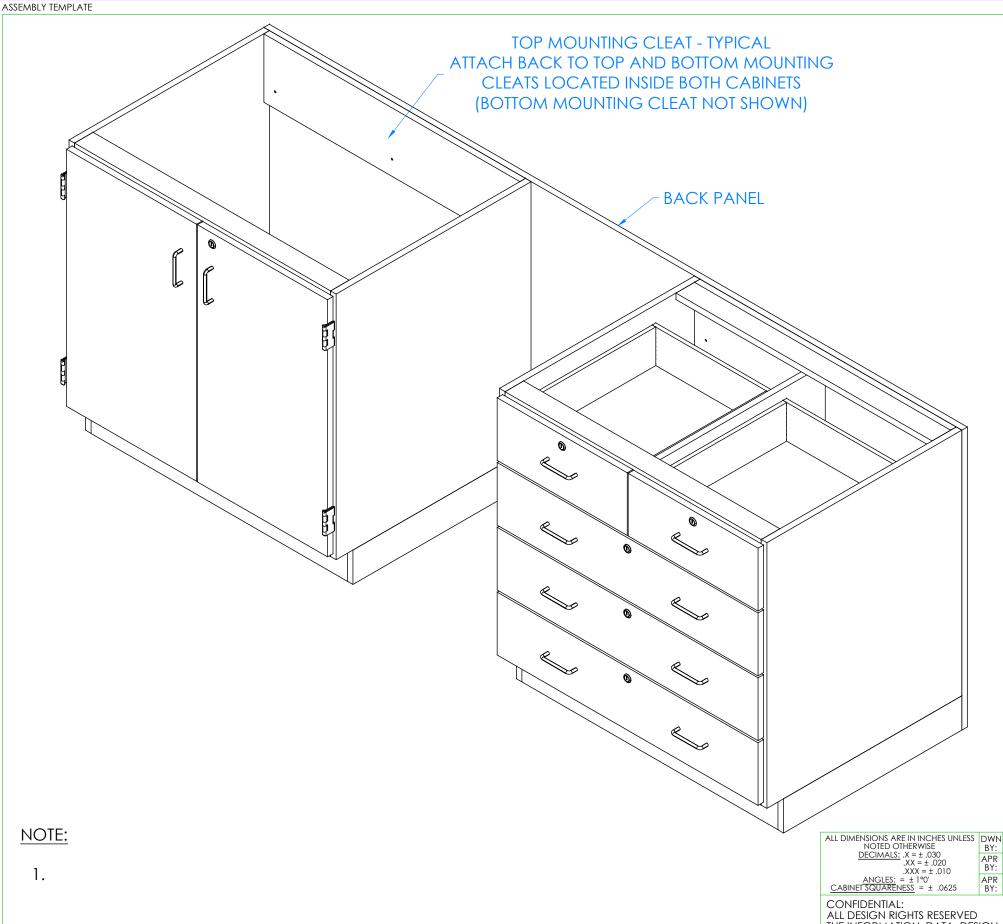

HARDWARE REQUIRED FOR STEP				
QTY	DESCRIPTION	PART NUMBER		
1	BACK PANEL	N/A		
12	SCREWS - BACK PANEL	100478		

#### STEP 2:

- a. ATTACH BACK PANEL TO BACK OF CABINETS USING PROVIDED HARDWARE LISTED ABOVE.
- b. SCREW INTO TOP AND BOTTOM MOUNTING CLEATS LOCATED INSIDE BOTH CABINETS.
- C. MAKE SURE BACK PANEL IS FLUSH WITH OUTSIDE EDGES OF CABINETS.

ALL DIMENSIONS ARE IN INCHES UNLESS NOTED OTHERWISE DECIMALS: X = ± .030 XX = ± .020 XY = DATE DWN: 11/8/16 DATE APR:

ALL DESIGN RIGHTS RESERVED

THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE
THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com


REVISION:

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

DRAWING NUMBER: 1114 & 1114F, 1116 & 1116F NTS 5 OF 14 REV C

UPDATED SILICONE PROCEDURE 8/15/23 RJMΑ CREATED DRAWING 11/8/16 **EMR** REV. DESCRIPTION DATE NAME ECN NO.

REVISION LEVEL

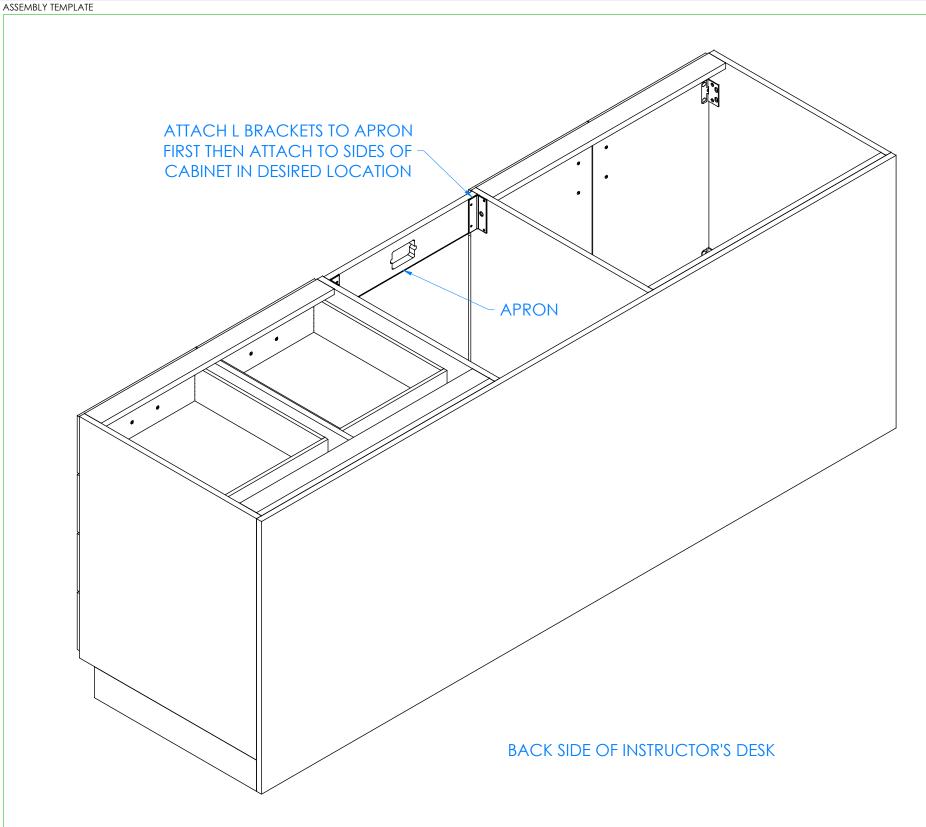

HARDWARE REQUIRED FOR STEP				
QTY	DESCRIPTION	PART NUMBER		
1	APRON	N/A		
2	L BRACKET	100355		
8	SCREWS - L BRACKET	100649		

#### STEP 3:

- a. ATTACH L BRACKETS TO APRON WITH PROVIDED HARDWARE LISTED ABOVE.
- b. MAKE SURE BRACKETS ARE FLUSH WITH TOP EDGE OF APRON.
- C. MOUNT APRON TO SIDES OF BOTH CABINETS IN DESIRED LOCATION WITH REMAINING SCREWS.

NOTE:

1.

ALL DIMENSIONS ARE IN INCHES UNLESS NOTED OTHERWISE	DWN BY:	EMR	DATE DWN:	11/8/16
DECIMALS: $.X = \pm .030$ $.XX = \pm .020$ $.XXX = \pm .010$	APR BY:		DATE APR:	
ANGLES: = $\pm 1^{\circ}0'$ CABINET SQUARENESS = $\pm .0625$	APR BY:		DATE APR:	

CONFIDENTIAL:
ALL DESIGN RIGHTS RESERVED
THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE
THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

DRAWING NUMBER: 1114 & 1114F, 1116 & 1116F NTS 6 OF 14 REV C


С	UPDATED SILICONE PROCEDURE	8/15/23	RJM	-	
Α	CREATED DRAWING	11/8/16	EMR	-	
REV.	DESCRIPTION	DATE	NAME	ECN NO.	

REVISION LEVEL

#### STEP 4:

- a. APPLY SILICONE ADHESIVE TO TOP EDGES OF CABINETS AND APRON.
- b. APPLY SILICONE ADHESIVE IN DOT PATTERN LIKE SHOWN BELOW FOR BEST RESULTS.
- C. PLACE TOP ON UNIT WITH PROPER OVERHANG (1" OVERHANG ON SIDES AND 1.50" ON FRONT AND BACK).
- d. CLAMP ON TOP TO TOP RAILS OF CABINETS AND APRON TO REMOVE ANY WARP USING SHIMS AND C-CLAMPS, IF NEEDED, WHEN ALIGNING THE TOP (DO THIS BEFORE ADHESIVE ON EDGES SETS UP).
- e. LET CURE FOR 6-12 HOURS.

	HARDWARE REQUIRED FOR STEP				
QTY	DESCRIPTION	PART NUMBER			
1	SILICONE	100711			
1	TOP	VARIES			

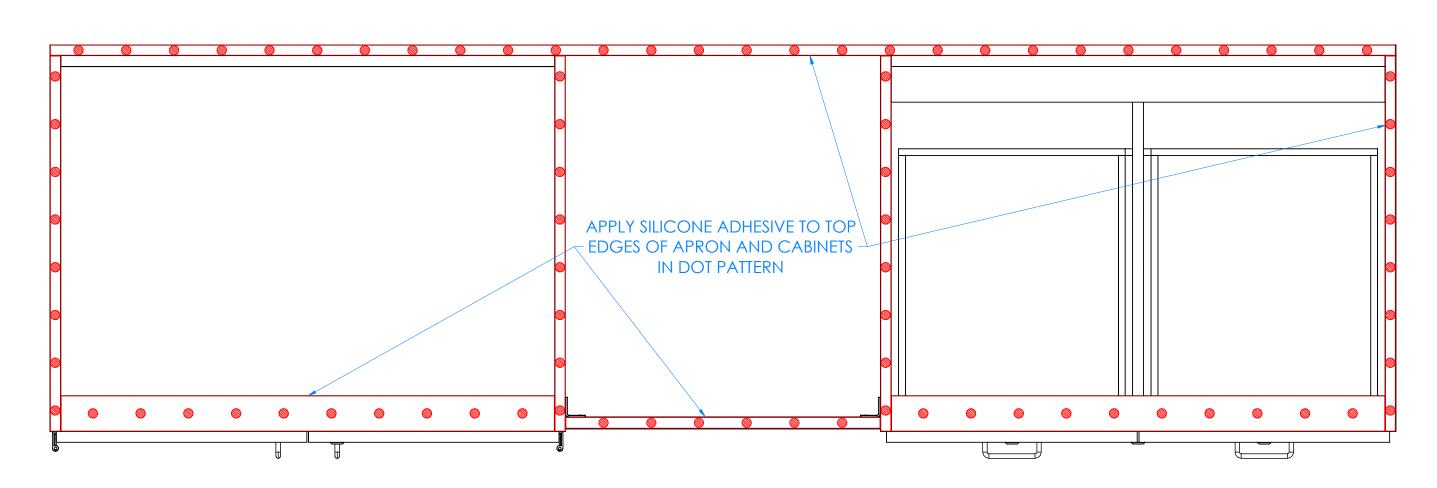

#### TOP VIEW OF INSTRUCTOR'S DESK SHOWN

#### NOTE:

1.

С	UPDATED SILICONE PROCEDURE	8/15/23	RJM	-
Α	CREATED DRAWING	11/8/16	EMR	-
REV.	DESCRIPTION	DATE	NAME	ECN NO.
	REVISION LEVEL		•	

ALL DIMENSIONS ARE IN INCHES UNLESS NOTED OTHERWISE	DWN BY:	EMR	DATE DWN:	11/8/16
<u>DECIMALS:</u> .X = ± .030 .XX = ± .020 .XXX = ± .010	APR BY:		DATE APR:	
ANGLES: = ± 1°0'  CABINET SQUARENESS = ± .0625	APR BY:		DATE APR:	

CONFIDENTIAL:

ALL DESIGN RIGHTS RESERVED

THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING
THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT
WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY
REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN
CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

DRAWING NUMBER:


DRAWING NUMBER: SCALE: SHEET: REVISION: 1114 & 1114F, 1116 & 1116F NTS 7 OF 14 REV C

ASSEMBLY TEMPLATE

STEP 5:

- a. IF YOU DON'T HAVE A UNIT WITH A SINK, SKIP TO STEP 6.
- b. APPLY SILICONE ADHESIVE TO SINK OPENING ON TOP.
- c. LOWER SINK INTO OPENING.
- d. WIPE OFF ANY EXCESS CAULK AND ALLOW TO SET.
- e. LET CURE FOR 6-12 HOURS.

	HARDWARE REQUIRED FOR STEP					
QTY	DESCRIPTION	PART NUMBER				
1	SILICONE	100711				
1	FIXTURE - SINK	100699				

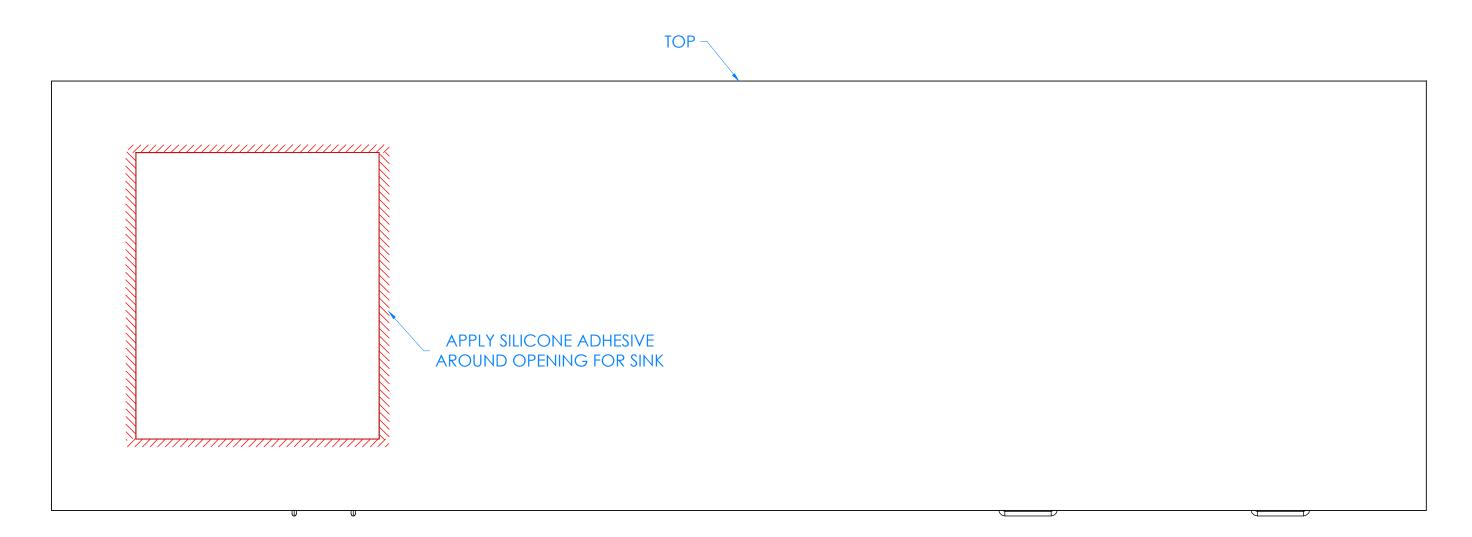

#### TOP VIEW OF INSTRUCTOR'S DESK SHOWN

#### NOTE:

1.

.XXX = ± .010 ANGLES: = ± 1°0' CABINET SQUARENESS = ± .0625 ALL DESIGN RIGHTS RESERVED

DECIMALS: .X = ± .030 .XX = ± .020

ALL DIMENSIONS ARE IN INCHES UNLESS DWN NOTED OTHERWISE BY:

THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.

APR BY:

DATE DWN:

DATE APR:

HESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING HAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT RITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY EPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.




300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

DRAWING NUMBER:

REVISION: 1114 & 1114F, 1116 & 1116F NTS 8 OF 14 REV C

С	UPDATED SILICONE PROCEDURE	8/15/23	RJM	-	THE
Α	CREATED DRAWING	11/8/16	EMR	-	TH/ WR
REV.	DESCRIPTION	DATE	NAME	ECN NO.	REF
REVISION LEVEL					CC

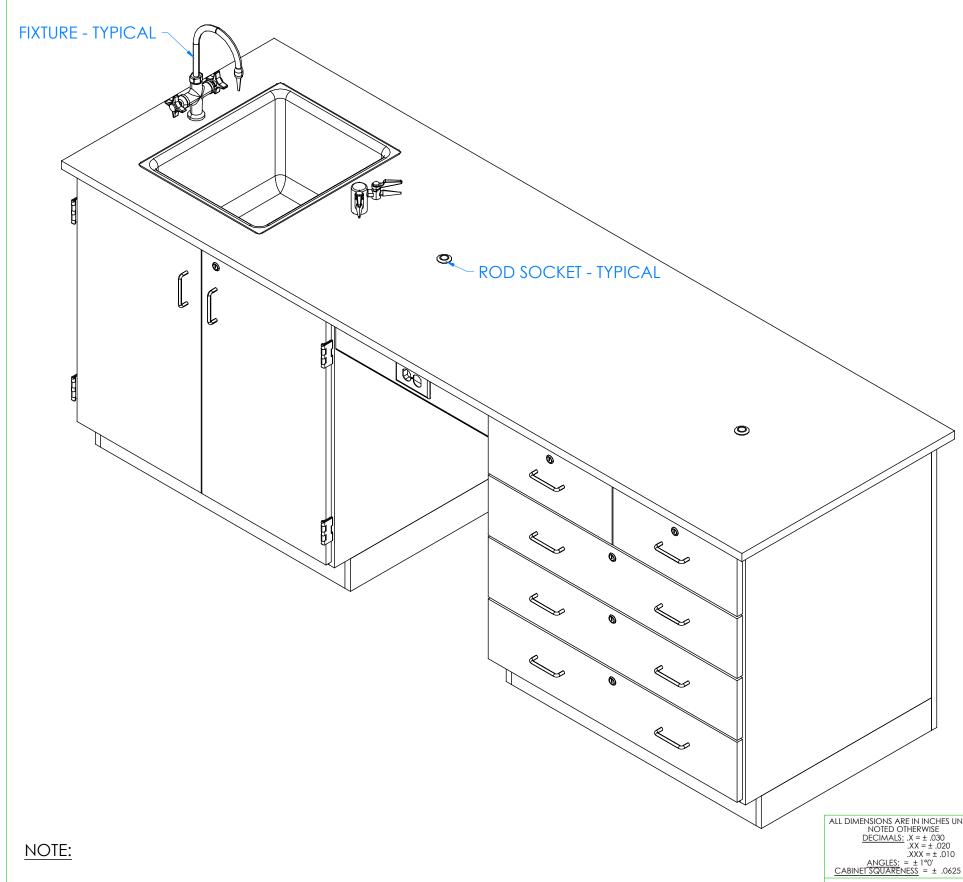

# HARDWARE REQUIRED FOR STEP

QTY	DESCRIPTION	PART NUMBER
1	FIXTURE - FAUCET	100048
1	FIXTURE - FAUCET	100467
1	FIXTURE - SINK TRAP	100056
1	FIXTURE - SINK OUTLET/STRAINER	254047
1	ROD SOCKET	206505

#### STEP 6:

- a. IF YOU DON'T HAVE A UNIT WITH FIXTURES, SKIP TO STEP 10.
- INSTALL FIXTURES IN THE HOLES PROVIDED ON TOP.
- INSTALL SINK TRAP AND SINK OUTLET/STRAINER INTO SINK.
- d. INSERT ROD SOCKETS INTO PRE-DRILLED HOLES IN TOP.

1. ALL WATER, ELECTRICAL, AND GAS CONNECTIONS SHOULD BE PERFORMED BY A TRAINED PROFESSIONAL PER LOCAL CODE.

ASSEMBLY TEMPLATE

С	UPDATED SILICONE PROCEDURE	8/15/23	RJM	-	
Α	CREATED DRAWING	11/8/16	EMR	-	
REV.	DESCRIPTION	DATE	NAME	ECN NO.	
	REVISION LEVEL				

ALL DIMENSIONS ARE IN INCHES UNLESS DWN NOTED OTHERWISE DWN BY: DATE DWN: 11/8/16 DATE APR:

ALL DESIGN RIGHTS RESERVED

THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE
THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.


THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.




300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

DRAWING NUMBER: 11114 & 11114F, 11116 & 11116F NTS 9 OF 14 REV C

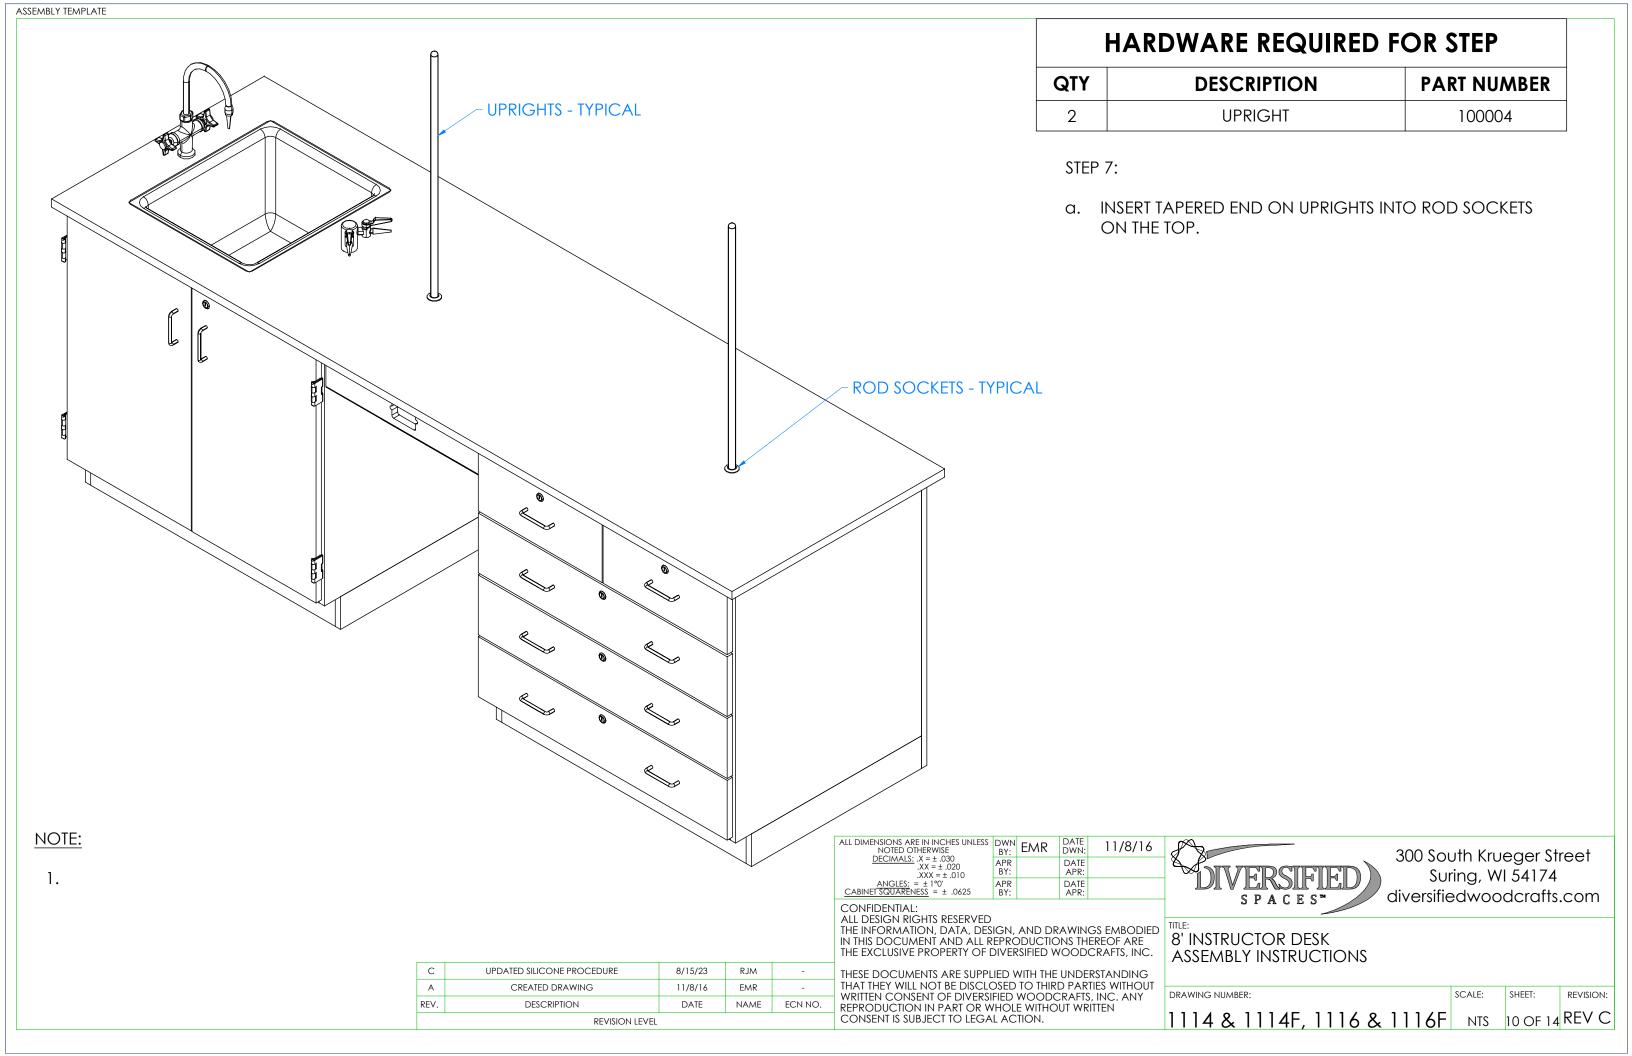

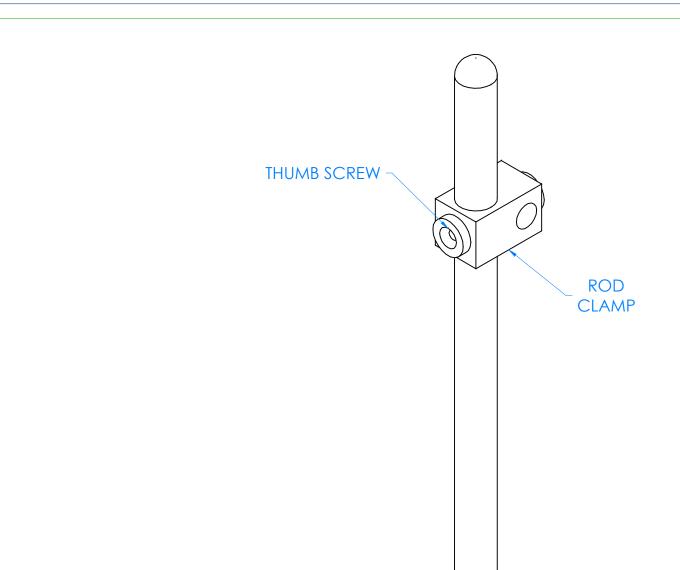

## HARDWARE REQUIRED FOR STEP

QTY	DESCRIPTION	PART NUMBER
2	CLAMP	100002

#### STEP 8:

- a. SLIDE ROD CLAMPS OVER UPRIGHT AND TIGHTEN IN DESIRED LOCATION USING THUMB SCREWS PROVIDED ON CLAMPS.
- b. REPEAT ON OTHER UPRIGHT.

NOTE:

ASSEMBLY TEMPLATE

1.

**CLOSE UP OF UPRIGHT** 

ALL DIMENSIONS ARE IN INCHES UNLESS DWN NOTED OTHERWISE DWN BY: DATE DWN: 11/8/16 DECIMALS: .X = ± .030 .XX = ± .020 DATE APR:  $.XX = \pm .010$   $ANGLES: = \pm 1^{\circ}0'$   $CABINET SQUARENESS = \pm .0625$ 

ALL DESIGN RIGHTS RESERVED

THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE
THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.




300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

DRAWING NUMBER:

1114 & 1114F, 1116 & 1116F NTS 11 OF 14 REV C

	С	UPDATED SILICONE PROCEDURE	8/15/23	RJM	-	
	Α	CREATED DRAWING	11/8/16	EMR	-	
R	EV.	DESCRIPTION	DATE	NAME	ECN NO.	
		REVISION LEVEL				

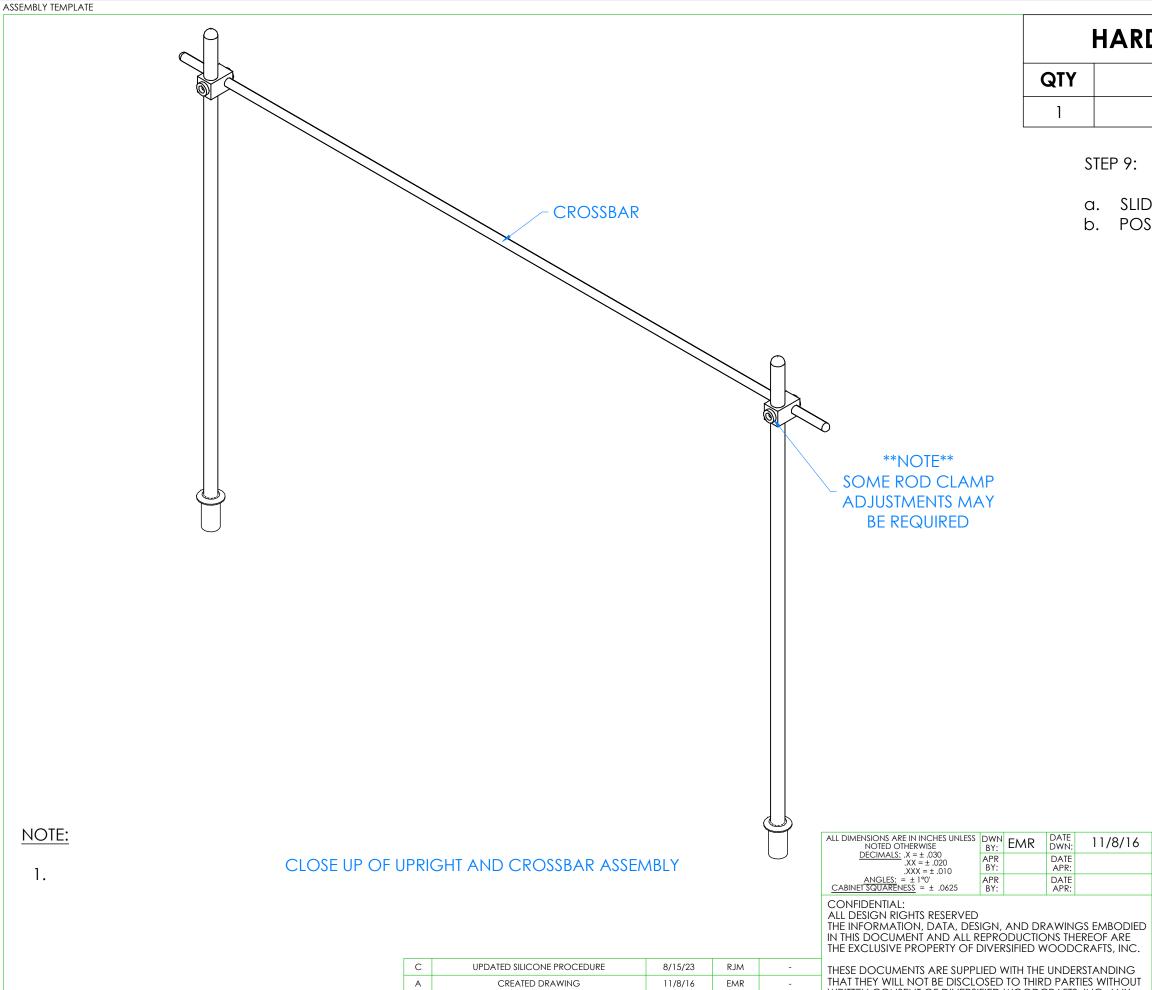

DESCRIPTION

DATE

REVISION LEVEL

NAME

ECN NO.

REV.

### HARDWARE REQUIRED FOR STEP

QTY	DESCRIPTION	PART NUMBER
1	CROSSBAR	100006

#### STEP 9:

- SLIDE CROSSBAR THROUGH ONE CLAMP.
- POSITION OTHER END THROUGH OTHER CLAMP.

	DWN BY:	EMR	DATE DWN:	11/8/16
DECIMALS: $.X = \pm .030$ $.XX = \pm .020$ $.XXX = \pm .010$	APR BY:		DATE APR:	
$\frac{\text{ANGLES:}}{\text{CABINET SQUARENESS}} = \pm .0625$	APR BY:		DATE APR:	


THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

DRAWING NUMBER: 1114 & 1114F, 1116 & 1116F NTS 12 OF 14 REV C

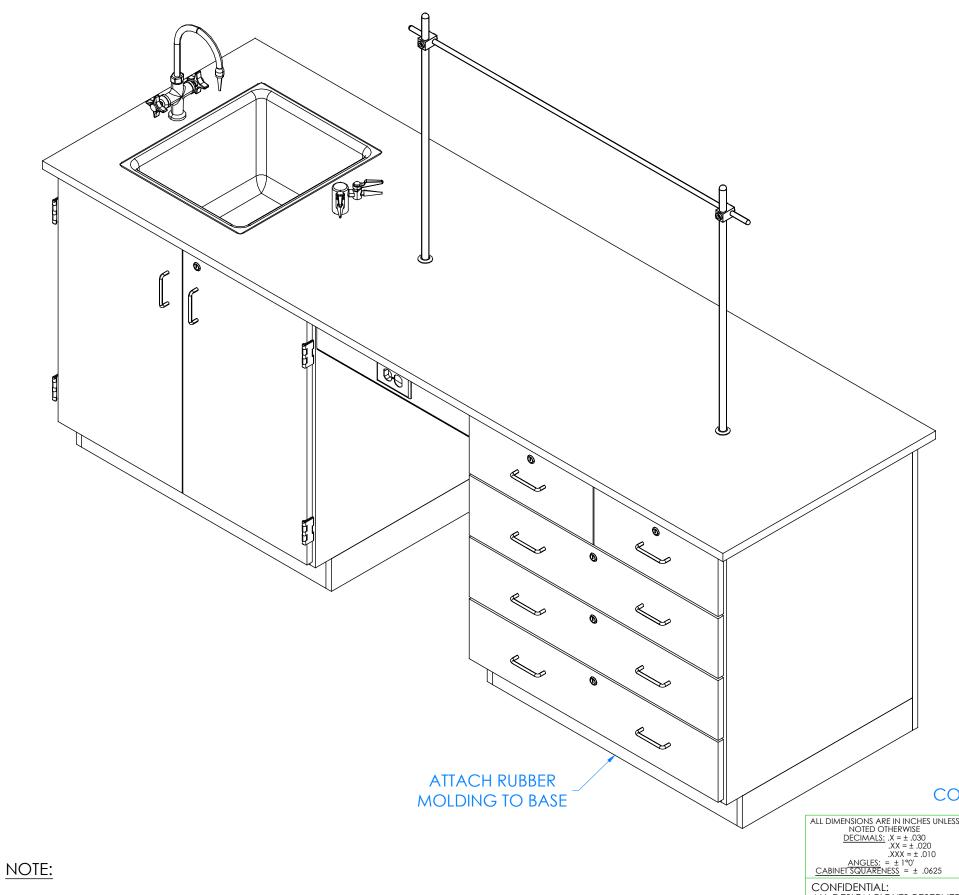

	HARDWARE REQUIRED FOR STEP						
QTY	DESCRIPTION	PART NUMBER					
25	RUBBER BASE MOLDING	100283					
8	STAINLESS STEEL CORNERS	100057					
32	SCREWS - BASE	100649					

#### STEP 10:

- a. ATTACH RUBBER MOLDING TO BASE OF INSTRUCTOR'S DESK USING CONTACT CEMENT.
- b. SCREW STAINLESS STEEL CORNER BRACKETS ON EACH CORNER OVER BASE MOLDING USING PROVIDED HARDWARE LISTED ABOVE.

#### COMPLETE UNIT SHOWN

ALL DIMENSIONS ARE IN INCHES UNLESS NOTED OTHERWISE DECIMALS: X = ± .030 XX = ± .020 XX = ± .020 APR RY DATE DWN: 11/8/16 DATE APR:

CONFIDENTIAL:
ALL DESIGN RIGHTS RESERVED
THE INFORMATION, DATA, DESIGN, AND DRAWINGS EMBODIED
IN THIS DOCUMENT AND ALL REPRODUCTIONS THEREOF ARE
THE EXCLUSIVE PROPERTY OF DIVERSIFIED WOODCRAFTS, INC.

THESE DOCUMENTS ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN CONSENT OF DIVERSIFIED WOODCRAFTS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN CONSENT IS SUBJECT TO LEGAL ACTION.



300 South Krueger Street Suring, WI 54174 diversifiedwoodcrafts.com

8' INSTRUCTOR DESK ASSEMBLY INSTRUCTIONS

DRAWING NUMBER:

1114 & 1114F, 1116 & 1116F NTS 13 OF 14 REV C

1.

ASSEMBLY TEMPLATE

UPDATED SILICONE PROCEDURE 8/15/23 RJM Α CREATED DRAWING 11/8/16 **EMR** REV. DESCRIPTION DATE NAME ECN NO. REVISION LEVEL

#### TROUBLESHOOTING YOUR GFCI ELECTRICAL RECEPTACLE:

<u>PLEASE NOTE: THROUGHOUT ANY OF THE FOLLOWING STEPS (PROCEDURES); IF YOU ARE NOT SURE YOU CAN DO THIS JOB SAFELY, AND COMPETENTLY, REFER THIS WORK TO QUALIFIED PROFESSIONAL!</u>

If your unit comes equipped with a GFCI (Ground Fault Circuit Interrupter) electrical receptacle, and there is no power in the receptacle please consider/check the following:

- The extension cord (if being used) is working properly.
- The breaker hasn't been tripped, or turned off.

This type of GFCI has two testing-related buttons on it. One button is appropriately labeled "TEST", and the other button is labeled "RESET". To test the GFCI receptacle follow these steps:

- Plug in an appliance (lamp or night light) into the outlet. The light should now be on. Then press the "TEST" button on the GFCI. The GFCI "RESET" button should pop out, and the light should go out.
- If the "RESET" button pops out, but the light doesn't go out, the GFCI has been improperly wired. In this case please contact a certified professional. There may also be a problem with other wiring in the same circuit.
- If the "RESET" button doesn't pop out, the GFCI is defective, or malfunctioned, and should be replaced.
- If the GFCI is functioning properly, and the lamp goes out, press the "RESET" button to restore power to the outlet.

Conversely, if you have a GFI that has tripped (which is common) and it will not reset, you may have a wiring short in the circuit, a defective appliance on the circuit, or the GFI itself has become defective. To test a tripping GFCI follow these steps:

- Remove every appliance connected to the GFCI's circuit and reset it. If it doesn't reset there may either be a wiring fault behind a socket outlet, or your GFCI itself has become faulty.
- Make sure whatever you are plugging into to the GFCI is dry and not damaged.
- Only plug in one item at a time. If you are plugging in a defective item it will cause the GFCI to trip, and that item therefore should be replaced.

If you are still having difficulty the easiest way to troubleshoot a GFI is to obtain a GFI tester, which is available at most hardware stores. It plugs into the GFI outlet, and will supply you with a "snapshot" of your connections, indicating wiring problems and/or the condition of the GFI. Another way to troubleshoot is to simply purchase a new GFI and install it.