



DITA LAS VEGAS LOAD-IN POSITION DETAILS LIGHT PLOT REVISION 5

TOWERS


SOCA: S4-S6
UNIVERSE: 25

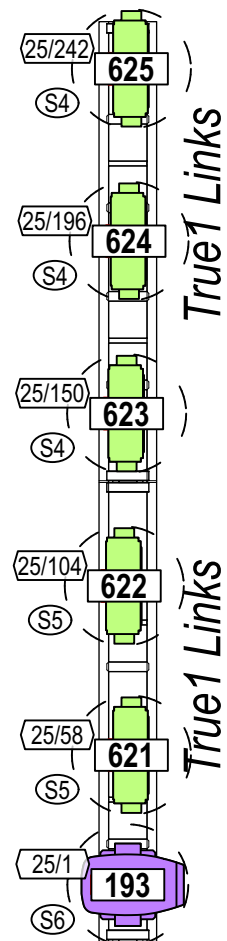


SOCA: L4-L6
UNIVERSE: 27

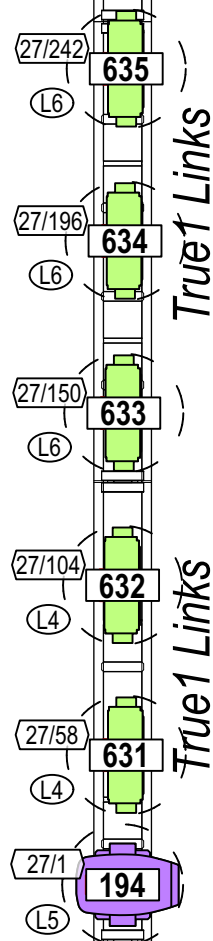

SOCA: L1-L3
UNIVERSE: 26

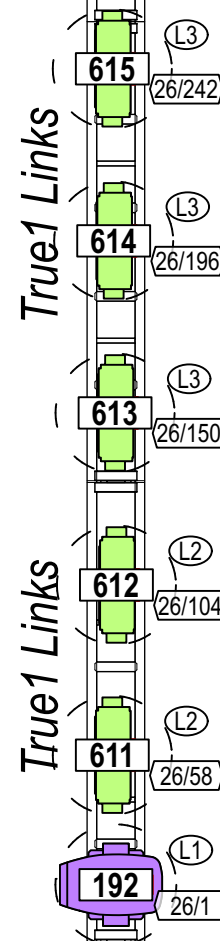

SOCA: S1-S3
UNIVERSE: 24

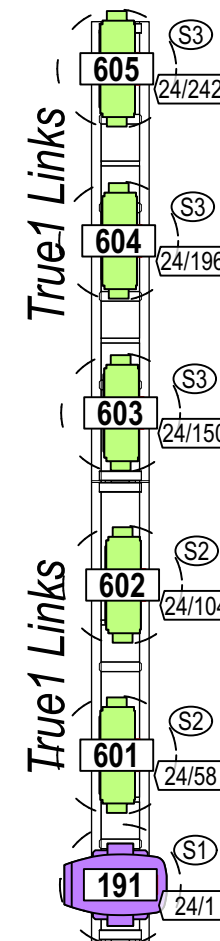

TOP

BOTTOM

SR Tower 1 SR Tower 2 SL Tower 2 SL Tower 1

Hang Fuze Profiles on Safer Sidearm as low as possible. Hang top Magic Blade as close to +16' as possible and distribute the rest evenly. We will build 1 and match the others to it.

See rigging details for SL+SR Tower 2!

	ETC Source4 LED2LS 19deg @ 171w 23.2 lb PowerCON Direct Inc.Crv (10)	24		Clay Paky Alpha Profile 1500 @ 2kw 111 lb PowerCON Standard Mode (43)	1		GLP Impression FR10 Bar @ 800 w 53 lb True1 Mode 4: MultiPix Adv. (79)	6
	ETC Source4 LED2LS 26deg @ 171w 23.4 lb PowerCON Direct Inc.Crv (10)	26		HES SolaSpot Pro CMY @ 480w 65 lb PowerCON Standard Mode (35)	24		Impression X4 Bar 20 @ 450w 32 Lb PowerCON SPixH Mode (89)	36
	Robe MegaPointe @ 670w 48.5 lb True1 Mode 1 (39)	20		Elation Platinum Spot 15R Pro @ 320w 49Lbs PowerCON Extended Mode (34)	8		Chauvet COLORado Batten 72 @ 88w 9.8 lb PowerCON TR16 Mode (18)	16
	Elation Artiste Monet @ 1.3kw 88.2 lb True1 Extended Mode (67)	17		Varilite VLX Wash @ 840w 62 lb PowerCON Standard Mode (23)	14		Platinum Spot 35 Pro @ 1.2kw 83 lb PowerCON Extended Mode (41)	4
	Elation Fuze Max Profile @ 1.126kw 73.4 lb True1 CMY Extended Mode (57)	35		Ayrton Magic Blade FX @ 400 w 28.7 lb True1 Extended Mode (46)	20			