



RPOD CLASSIC

True Wireless Earbuds

Welcome to RIOTORO

Thank you for purchasing the RPOD CLASSIC!

Enjoy your favorite games with the RPOD CLASSIC true wireless earbuds enabled with DSP Noise Cancellation.

The 6.0mm drivers enrich your listening experience with high-fidelity sound, and onboard touch controls let you manage your RPOD CLASSIC with a tap.

The RPODS CLASSIC earbuds include a charging case that extends battery life to up to 9 hours of listening per charge and up to 27 hours in total. Using Bluetooth 5.0 it allows seamless pairing with your Bluetooth-enabled device and long range connectivity to enable you to move freely.

Note: This manual is a guide for the RPOD CLASSIC rPods. For instructions on installing consoles, PC, mobile devices and other devices, please refer to their documentation.



CONTENTS

1	Before You Begin	
	- Exploded view	4
	- What is in the box	5
	- Precautions	6
	- Requirements	7
2	Ready, Setup, Go	
	- Specifications	9
	- Choose your ear tips	10
	- How to remove and attach ear tips	11
	- How to turn on	12
	- How to turn off	13
	- How to pair	14
	- Automatic pairing / disconnecting	15
	- How to wear	16
	- Using for calls	17
	- Using for audio	18
	- How to charge with USB Type-C	19
	- How to charge wirelessly	20
- Restoring to factory settings	21	
- How to control volume	22	
3	Top / Front Panel Assembly	
	- General Maintenance	24
	- Important Safety Information	25
	- Limited product warranty ("Limited Warranty")	26
	- Troubleshooting your new RPOD CLASSIC	27
- Recommended parts	28	




1

Before You Begin

www.riotoro.com/headphones

Exploded view

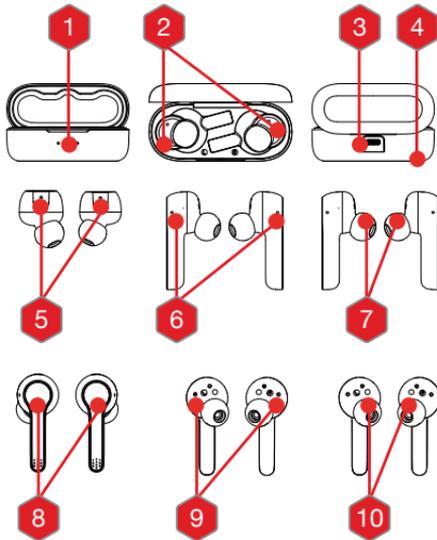

1. Charging indicator
2. Charging slot
3. Type-C charging port
4. Wireless charging area
5. Microphone
6. LED indicator
7. Removable ear tips
8. Multifunction button (MFB)
9. Charging thimble
10. Light sensor

WHAT'S IN THE BOX

ITEM	IMAGE	DESCRIPTION	USE	QTY
1		RPOD CLASSIC TWS RPODS	Enjoy your gaming experience	1
2		Case	Charge your rPods	1
3		Textured ear tips	Secure fit	6
4		Smooth ear tips	Comfort fit	6

PRECAUTIONS


Please take the following precautions:

- Handle your rPods with care.
- Do not try to open the rPods as you might damage its components.
- To avoid damaging components by electrostatic discharge, periodically ground yourself by touching an unpainted metal surface or by using a wrist grounding strap.

REQUIREMENTS

In order to configure the RPOD CLASSIC you will need:

1. A flat working area (e.g. desk or table) with sufficient space
2. Bluetooth enabled device



2

Ready, Setup, Go

www.riotoro.com/headphones

SPECIFICATIONS

GENERAL

- Chip:	Qualcom 3020
- Material:	ABS + PC
- Color:	Black / White
- Noise Canceling:	Yes, DSP Noise Cancellation
- Sound Mode:	Stereo
- Connection Type:	Wireless
- Wireless Connectivity:	Bluetooth
- True Wireless:	Yes
- Maximum Wireless Range:	32.8 ft / 10.0 m
- Water Resistant:	Yes
- Built-In Microphone:	Yes
- Headphone Fit:	In-Ear
- Ear Tips:	Yes, Secure Fit and Comfort Fit
- Ear Bud Battery Capacity:	55mAh
- Charging Case Battery Capacity:	350mAh
- Number of Charges:	1 in rPods; two in charging case
- IPX Level:	5
- Controls:	Call, track selection, volume
- Maximum Talk Time:	7.5 hours
- Battery Life:	up to 27 hours Yes, DSP Noise Cancellation
- Full Charge Time:	1.5 hrs
- Standby Time:	65.0 hrs
- Headphone Type:	True Wireless In-Ear
- Connection Type:	Bluetooth 5.0
- THD:	<5%,200Hz-3kHz
- Impedance:	16 Ohms ±15%
- Driver Diameter:	6.0 mm
- Sound Pressure Level:	95±3dB
- Frequency Response:	20Hz - 20KHz
- Working Temperature:	-20-60°C
- Profile:	HFP/HSP/A2DP/AVRCP
- Wireless Charging:	Yes
- Charging Voltage:	5v


CHOOSE YOUR EAR TIPS

Your RPODS come with two sets (Secure fit / Comfort fit) of small, medium, and large silicone ear tips. Choose the size or combination of sizes that best fits your ear.

1



2

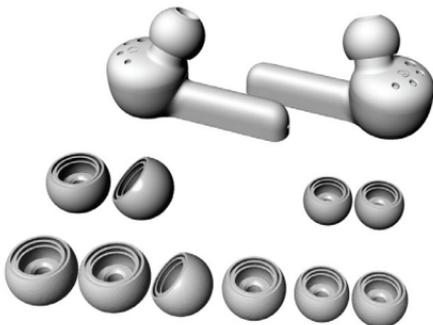

Take the rPods and accessory box out of the packaging and lay them (up side down) on a flat surface.


Have a feel of each type of ear tip and choose the one you like best. Secure fit are recommended for activities with movement and Comfort fit for relaxing moments.

Note: RPOD CLASSIC come with pre-installed medium size ear tips, try using the medium-sized ear tips in your ears, if you can't get a good seal, try adjusting the RPOD or switch to a different sized ear tip.


HOW TO REMOVE AND ATTACH EAR TIPS

If you need to change the pre-installed medium-sized ear tip, choose the fit and size you want from the provided options.

1

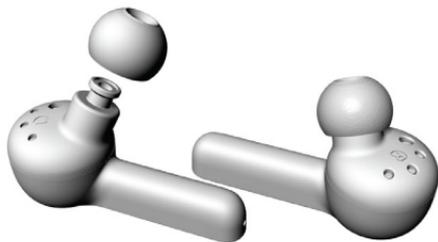

2

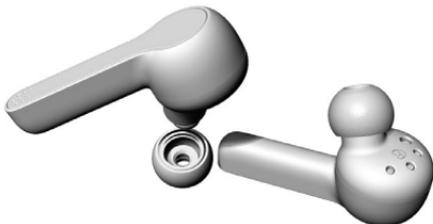

To remove an ear tip, pull firmly with your fingers at the base of the ear tip, where the ear tip is attached to the RPOD.

To attach an ear tip, align the ear tip with the connector on the RPOD. Push the ear tip onto the connector until you hear it click into place.

HOW TO TURN ON

Turning on your RPODS is quick and easy

1



2



Hold the multi-function button in both rPods for 3 seconds.

Take out both rPods from the charging box and they will power on.

Note: rPods make a double ding sound and green light in on for 2 seconds.

HOW TO TURN OFF

Turning off your RPODS is quick and easy

1



2



Place rPods into the charging case, they will start to charge and power off. Make sure both rPods are in the charging box or else none will power off.

Hold the multi-function button in both rPods for 3 seconds.

Note: rPods make a double ding sound and red light in on for 2 seconds.

HOW TO PAIR


Make sure the RPODS and Bluetooth enabled device are in close proximity to each other (no more than 3 feet apart).

1



Take both rPods out of the charging case, the LED indicator light will flash repeatedly red and green indicating they are ready to pair.

2

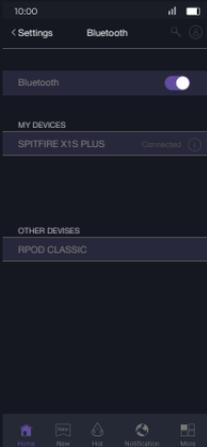

Make sure the Bluetooth is turned on in your device and select RPOD CLASSIC. Once paired the green light will flash slowly to indicate connection.

Note: rPods make a triple ding sound and flash red and green lights during pairing mode. Once paired both rPods make double ding sounds and the light flashes slowly in green.


AUTOMATIC PAIRING / DISCONNECTING

The RPODS are design to remember the last connected device.

1



2

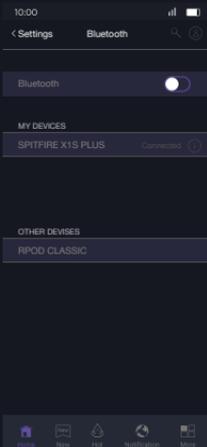


The RPODS automatically reconnect to the last paired device. If they fail to reconnect within 3-5 seconds, they will automatically enter to pairing mode.

If automatic reconnect does not work, turn off the Bluetooth, disconnect or forget the RPODS on your device. They will automatically enter to pairing mode.


Note: pods make a triple ding sound and rapid red and green lights will flash to indicate it is ready to pair.

HOW TO WEAR

Once you have paired your RPODS you are ready to wear.

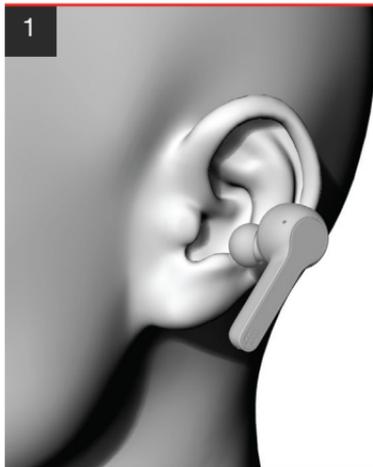


Insert the RPODS into your ear and gently make it fit comfortably.

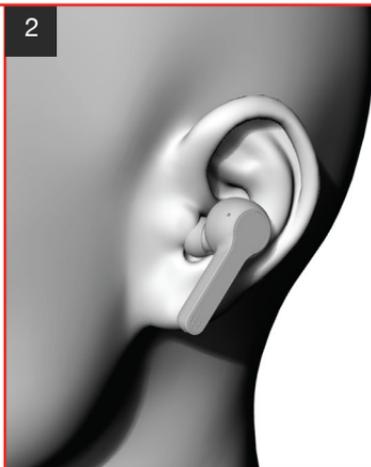

The ear tips should make a good seal with your ear canal. When the fit is right, you experience better noise cancellation and sound.

USING FOR CALLS

The RPODS are capable of making and receiving calls from the paired device.

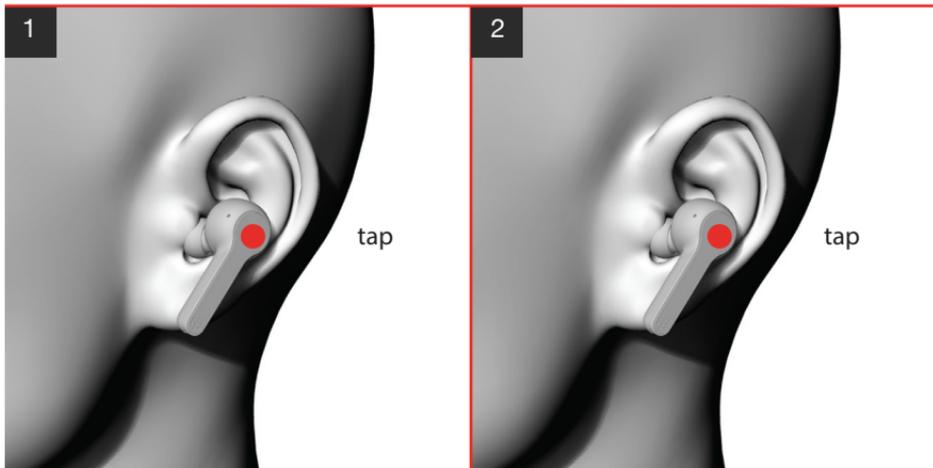


A triple ding prompt will let you know of incoming calls. On either RPOD, answer or hang up calls by tapping the multi-function button once, to reject a call hold the button for 2 seconds and release.

In order to enable your digital assistant simply triple tap the multi-function button and wait for your digital assistant prompt.

Note: When rPods are low on power they will ding prompt 4 times and red lights will flash every 10 seconds until they are recharged or turn off. Automatic power down will happen if rPods are not charged.

USING FOR AUDIO


The RPODS are the perfect peripheral for all your audio needs.

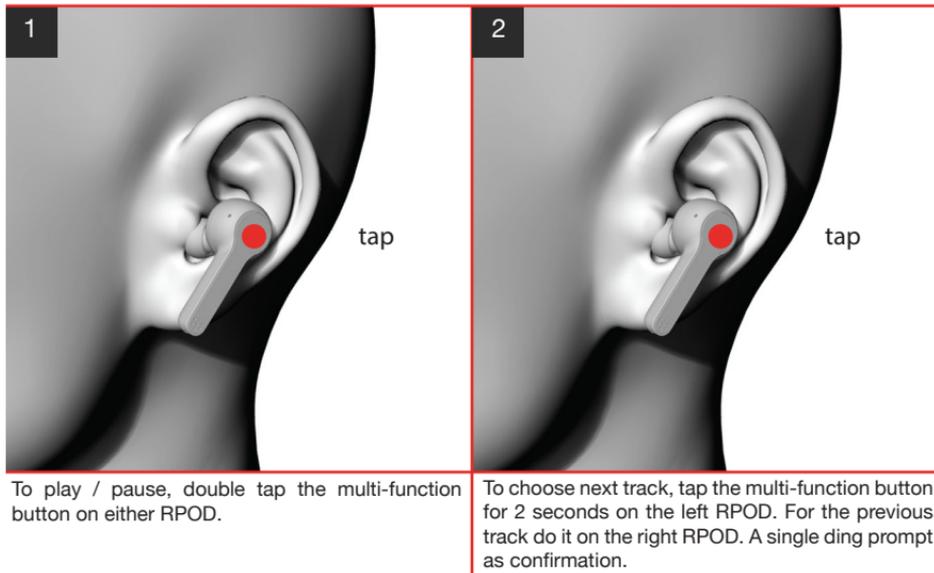

Note: When rPods are low on power they will ding prompt 4 times and red lights will flash every 10 seconds until they are recharged or turn off. Automatic power down will happen if rPods are not charged.

HOW TO CONTROL VOLUME

You are able to change volume directly on your RPODS.

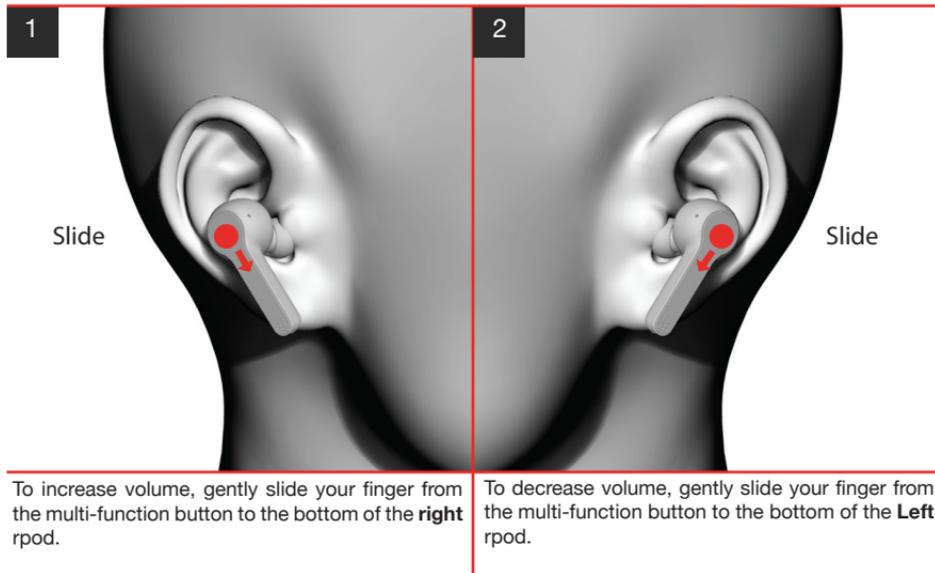

Note: repeat the process until you reach the desired level

HOW TO CHARGE WITH USB TYPE-C

Charging your RPOD CLASSIC rPods is as simple as placing them in the charging case and wait one hour for a full charge.

1



2



Place the rPods into the charging case, the LED indicator will turn solid red when charging and off when charging has completed.

As the case charges the rPods, each indicator light will dim. All LED indicators of charging case will be off when rPods are fully charged.

Note: The charging pins in the case provide DC 5V+/-0.1V voltage output. Once the battery voltage of the case is lower than 3.2V, the output of the charging pins turn off. (At this time, the rPods will turn on automatically if they are in the case, and turn off automatically if Bluetooth device is not connected for 5 minutes, they will not power on in charging case at this time.)

HOW TO CHARGE WIRELESSLY

For your convenience the RPOD CLASSIC case is equipped with USB Type-C for fast charging and wireless charging.

1



2



Place RPODS into the charging case, they will start to charge and power off.

Place the case on the wireless charger of your choosing and let it charge. All LED indicators will turn solid white when fully charged.

Note: depending on the chosen wireless charger you choose, they might cause the case to heat up, if this happens be careful, avoid direct contact, set the case aside and let it cool off.

RESTORING TO FACTORY SETTINGS

Restoring the RPOD CLASSIC to factory settings is really simple.

1



Place the rPods in the charging case.

2



Tap the rPods on the multi-function button five times. You can do it simultaneously or one at a time.

Note: once you successfully restore the rPods they will automatically power on and TWS pair. After TWS paired, Left rPod will enter into pairing mode.

Touch Controls

The RPOD CLASSIC have been designed to with touch controls to make your experience easy and convenient.

General Functions	Detail
Power On / Off	Press the multifunction button for 3 seconds on each rpoDs and it will power on / off. A slow flashing green light indicates power is on, when the power is off there is no light.
Volume Up	On your right RPOD slide your finger downwards, repeat the process until you reach the desired volume level.
Volume Down	On your left RPOD slide your finger downwards, repeat the process until you reach the desired volume level.
Take / End Call	Double tap the multi-function button on either RPOD.
Reject Call	Long press the multi-function button for 2 seconds.
Voice Assistant	When on standby / audio state, triple tap the multi-function button on either RPOD.
Play / Pause	On either rpod double tap the multi-function button in audio state.
Next Track	On the left rpod long press the multi-function button for 2 seconds.
Previous Track	On the right rpod long press the multi-function button for 2 seconds.

3

Everything Else

GENERAL MAINTENANCE

If you need to clean your gaming computer by doing more than wiping it down with a clean cloth, follow these instructions:

- Complete power down of your machine, display and peripherals.
- Disconnect all the power cables from the electrical outlet power strip.
- Disconnect all peripherals from the machine.
- Clean the machine with a soft, lint-free paper or cloth damped with mild soap and water.

Note: Do not spray liquid directly onto the case, liquid could drip inside it and cause electrical shock.

IMPORTANT SAFETY INFORMATION

In order to achieve maximum safety while using your RPOD CLASSIC, we suggest that you adopt the following guidelines:

- Keep the RPODs away from extreme heat and humidity, high heat will decrease the lifespan of the RPODs and battery (below 0°C or above 45°C).
- The RPODs should be charged at least once every 6 months.
- Clean with a soft cloth, damp with diluted soap water solution if necessary, never use chemical cleaners.
- Do not drop the RPODs on hard surfaces.
- Don't disassemble or modify your earbuds for any reason to avoid any damages and danger.
- When not in use, power the RPODs off and store in a cool, dry place.
- If the earbuds are left unused for over two weeks, you will need to do a full recharge.
- Be sure to use a 5V DC, 1A charger made by qualified manufacturer.
- Ensure that the distance between your device and the earbuds is not too far away and that nothing is blocking the signal between your device and the earbuds.
- Functions of the earbuds may differ due to different protocols supported by different wireless devices.
- Don't over charge to avoid the risk of fire.
- Don't put the device's LED lights close to humans' or animals' eyes.
- Do not use the earbuds during a thunderstorm as they may cause serious malfunction and increase the risk of electric shock.
- Do not clean the earbuds with harsh chemicals or strong detergents.

LIMITED PRODUCT WARRANTY ("Limited Warranty")

Limited Warranty. RIOTORO warrants the Product to be free from defects in materials and workmanship when used normally in accordance with the official documentation for the applicable Warranty Period from the date of retail purchase.

Exclusions and Limitations. This Limited Warranty does not cover:

- Software, including (without limitation) software added to the RIOTORO-branded hardware products or third-party software;
- Non-RIOTORO branded products and accessories, even if packaged and sold with the Product;
- Problems with and/or damage to the Product caused by using accessories, parts, or components not made by RIOTORO;
- Damage caused by service (including upgrades and expansions) performed by anyone who is not officially acting as an employee, representative or sub-contractor of RIOTORO;
- Claims arising from any unacceptable use or care of the Product;
- Claims arising from external causes, including (without limitation), accidents, acts of God, liquid contact, fire or earthquake;
- Products with a serial number or date stamp that has been altered, obliterated or removed;
- Cosmetic damage, minor cosmetic abnormalities (including minor pixel abnormalities) and normal wear and tear, including (without limitation) scratches, dents and chips.

For the latest and current terms of the Limited Product Warranty, please visit www.riotoro.com/warranty.

RECOMMENDED PARTS



CASES

CONVERTIBLE: Morpheus, the world's first convertible PC case, allows you to resize your PC as your needs evolve. The perforated mesh exterior and keeps the PC cool, and USB Type-C provides state-of-the-art connectivity.

FULL TOWER: The CR1288TG Prism RGB full-tower is larger in volume than desktop cases, with more room for drive bays, expansion slots, and custom or all-in-one (AIO) water cooling solutions.

MID TOWER: The budget-friendly CR500's steel and tempered glass design showcases your build. Its dual chambers and direct airflow layout keep the PC cool and quiet.

MINI TOWER: The ultra-compact CR1088 Prism updates the award-winning CR1080 with a new black/red exterior, RGB lighting, increased internal space, and dust filters. It packs a punch with support for full-size ATX motherboards, power supplies and graphics cards.

RECOMMENDED PARTS



COOLING

BIFROST 240: is a new generation water cooling solution for both AMD and Intel processors uses a 240.0 mm radiator with dual 120.0 mm static pressure 120.0 mm fans for extreme cooling that fits nearly any PC case.

CROSS-X LED Fan (Red, White, Blue): Delivers unparalleled Cooling Performance with it's Precision-Molded Fan Blade Design and a Fan Speed of 1500 RPM and exceeds expectations with a very comfortable 26.5 dB decibel noise rating.

RECOMMENDED PARTS



PERIPHERALS

AUROX: the Aurox Prism RGB gaming mouse combines an ergonomic exterior with an ultra-precise 10000 DPI optical sensor, 8 programmable buttons, aluminum scroll wheel, and customizable RGB lighting.

NADIX: The Nadix gaming mouse features RGB multicolor lighting a 10000 DPI optical sensor, and 7 programmable buttons. The durable finish provides years of comfortable gameplay.

The Ghostwriter PRISM: features cutting edge stealth design with German made Cherry MX switches. With many different options to choose from, the Ghostwriter PRISM keyboards have been designed to enhance your gaming style.

The Ghostwriter Classic: is a brand new keyboard featuring unique stealth design and low-profile, quiet membrane keys blend understated style with comfort and quiet efficiency.

RIOTORO®

© 2020 RIOTORO Inc. All rights reserved. RIOTORO, the RIOTORO logo, and RPOD CLASSIC are trademarks of RIOTORO Inc., Registered in the U.S. and other countries. All other trademarks are the property of their respective owners. Product may vary slightly from those pictured.

Technical Support and Customer Service
US & Canada
1-888- 270-7090
support@riotoro.com
cs@riotoro.com

sales@riotoro.com

© Copyright 2020 RIOTORO. All rights reserved.
All trademarks are the property of their respective owners.
Reproduction in whole or part without written permission is prohibited.



www.riotoro.com