
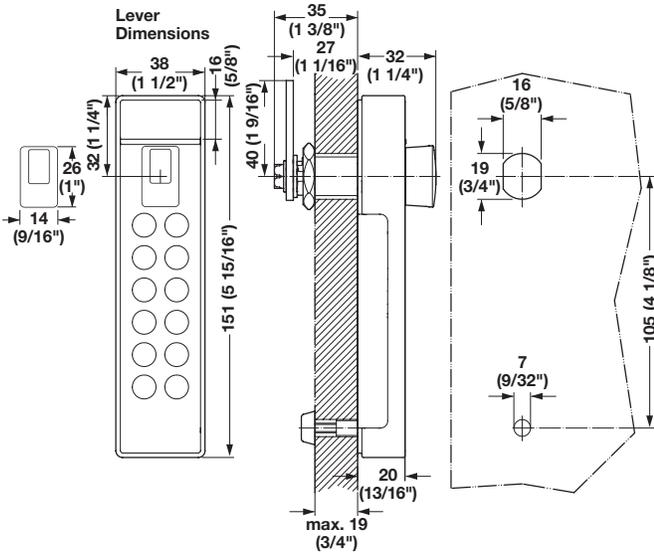


SAFE-O-TRONIC® Battery Powered Electronic Locking Systems

→ **LS 150 Keypad Lock**

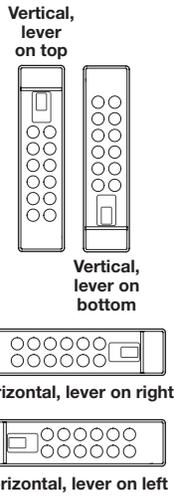

- > SAFE-O-TRONIC® access LS 150 is a lock used to electrically control cabinet doors, drawers and lockers
- > This lock operates in a day use or fixed mode
- > Lock is electrically released with a correct PIN code entered on the keypad.

Features

- > Lock complies with ADA standards for door locks
- > Lock is programmed with RFID FOBs for set up and emergency opening
- > Lock is easily programmed by user with easy to use keypad
- > Lock mounts vertically for raised panel doors
- > Lock powered by a 3-AAA battery, included 231.98.210
- > Low battery indicator via external LEDs
- > Designed to pass the ANSI/BIFMA 50 lbf. pull strength specification
- > Long battery life (10 lock cycles per day for four years)
- > Easy installation with only two drill points
- > For left hand and right hand operation
- > One programming key set required for project

Areas of Application

- > Suitable for interior use
- > Suitable for installation in wood, laminate, plastic and metal doors and drawers

Operating Modes

- > Day Use Mode: Allows the user to choose their code at time of operation
 Recommended for shared lockers or cabinets in a typical fitness locker room application
- > Fixed Use Mode: Allows management to set user codes
 99 user codes per lock possible
 Assigned locker applications

Technical Data

Tensile load limit:	1000 N. (225 lbf.)
Environmental:	Operating temp.: -10°-65° C (14°-150° F) Humidity (operating): 0-90%, non-condensing Protection: IP 43
Electrical:	Supply voltage: 4,5 VDC Connections: Battery pack, self-contained Battery Life: 32,000 lock cycles
Standards Compliance:	CE

Note

LS 150 programming key set required for programming and master key operation (see below).

- > Material: Lock body: Aluminum; Color: gray
 Face plate: Plastic; Color: black; Cam: Steel

Lock orientation	Handing	Item No.
Vertical, lever on top	RH/LH	231.98.090
Vertical, lever on bottom	RH/LH	231.98.091
Horizontal, lever on left	RH	231.98.092
Horizontal, lever on right	LH	231.98.093

Supplied With

- Nut
- Straight cam
- Mounting screw
- Spacers
- Instructions
- 3-AAA battery pack

Note

Batteries changed with Torx™ Screw Driver (sold separately, Item no. 231.99.909).

→ **LS 150 Programming Key Set**



- > Material: Plastic

Color	Item No.
black	231.98.511

Dimensional data not binding. Dimensions in mm, inches are approximate. We reserve the right to alter specifications without notice.