


- Converts 24V to 12VDC
- Accepts AC or DC Voltage
- Mounts Inside Height Strip
- All Wiring Connections Made Inside Height Strip

Low Voltage Power Adapter Height Strip Accessory

Conveniently sized to fit in the wall bracket of the Aigis Height Strip, the PS-HC1CH30 is an accessory power supply that allows an installer to run 24VAC to the installation site of a Height Strip camera, then convert the voltage to 12VDC to run the camera.

The standard Height Strip includes a plug-in power supply that accepts 110VAC, but the length of the power cord limits wiring options. The PS-HC1CH30 allows a central 24VAC supply powering other CCTV equipment to power an Aigis Height Strip as well.

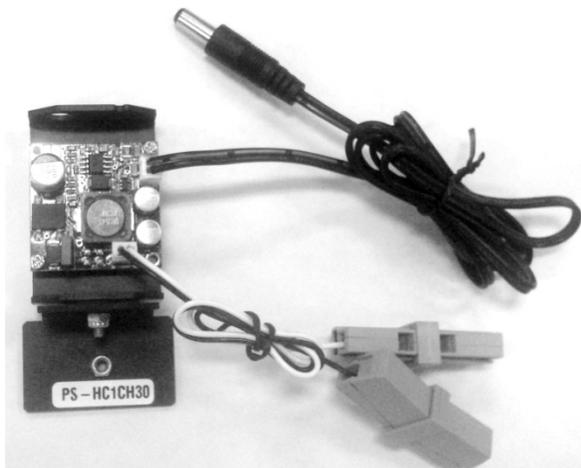

Specifications

Part Number	PS-HC1CH30
Input Voltage Type	AC or DC
Input Voltage Range	24V \pm 10%
Output Voltage	12VDC
Power Output (max)	500mA
Input Connector	2 x WAGO™ 224-201
Input Connector Wire Gauge	Accepts 20 ~ 16 AWG
Output Connector	DC Barrel Plug
Output Connector Dimensions	5mm Shell, 2.1mm Core
Environment	Indoor, 0~80% RH
Operating Temperature (°F)	+14°F ~ +122°C
Operating Temperature (°C)	-10°C ~ +50°C