





ENCLOSURES DESIGNED FOR THE WORLD'S WATER SYSTEMS™

ASSEMBLY INSTRUCTION READ CAREFULLY

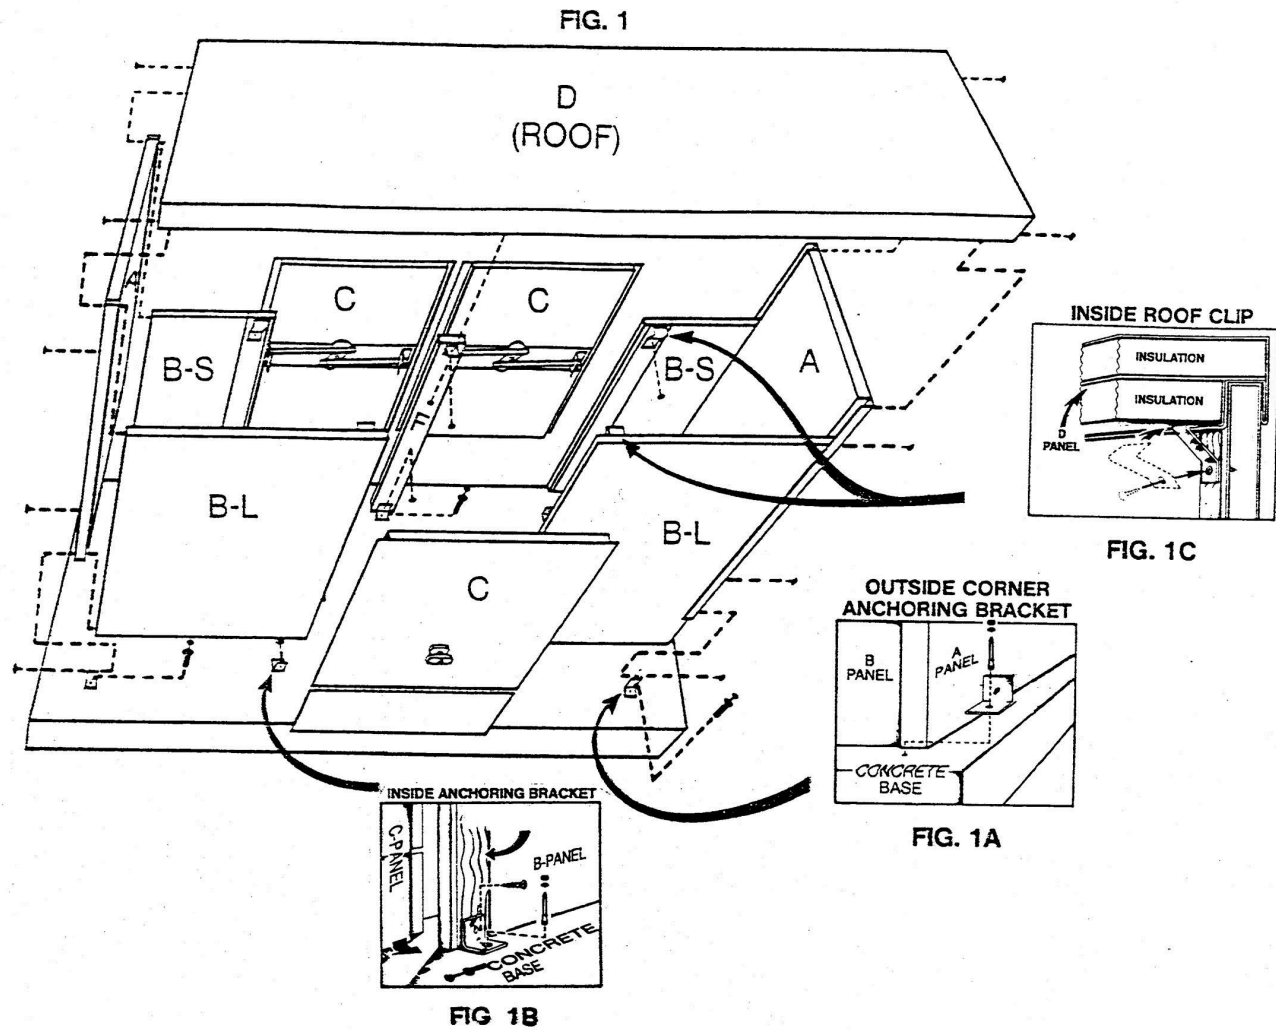

Model No.	Inside Dimensions	Outside Dimensions	Recommended Concrete Pad Dimensions
800-Series	38"W x 120"L x 56"H	41 3/4"W x 123 1/8"L x 59 1/2"H	52"W x 134"L x 6" Thick
800T-Series	38"W x 120"L x 80"H	41 3/4"W x 123 1/8"L x 83 1/2"H	52"W x 134"L x 6" Thick

1. Center a "6" thick concrete base around installed BFP.
 - A. Place expansion material around riser pipes and place conduit for electrical power before placing concrete. **CONCRETE SHOULD BE FINISHED ABSOLUTELY LEVEL, FLAT AND SMOOTH.** Allow concrete to cure.
 - B. Mark concrete with outside dimensions of enclosure. (Center around BFP).
2. Assemble both "A-B" (end and side) sections thru holes provided using one "B-S" panel and one "B-L" panel per section. Set on marked concrete base (FIG 2).
3. Set "D" (roof) panel on "A-B" sections and fasten thru holes provided. (FIG 1).
4. A. Using one (1) hexhead screw attach **Outside Corner SS Anchoring Brackets** to "A-B" sections. Fasten bracket to concrete using one anchor for each bracket (FIG 1A). Use masonry bit provided. Drill the hole in the concrete 3" deep, insert wedge anchor, hit wedge anchor until it is secure in the concrete. Use washer and nut provided to secure the anchor bracket.
- B. Square the "A-B" corners. Align the "B" panels so that they form a straight line. Using one (1) hexhead screw and one (1) wedge anchor for each bracket attach **Inside Aluminum Anchoring Brackets** to "B" panels and concrete (FIG 1B). Use same anchoring procedure as outlined in 4A.
- C. Insert **Inside Roof Clips** in "D" (roof) panel. Using one (1) hexhead screw in each clip attach clip to "B" (side) panel (FIG 1C).
5. Repeat steps 4a, 4B, 4C and 4D on other side.

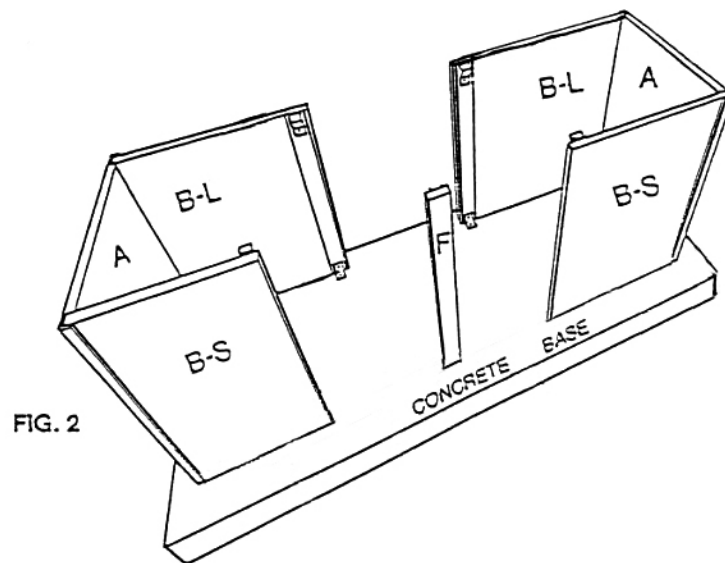

6. Place "F" post in center of opening and install **Inside Anchoring Brackets** at top and bottom
7. Set "C" panels and lock in place. (**Solid "C" panels to be ACCESS DOOR panels.**)
8. Provide ground-fault interrupter device in electrical circuit according to applicable codes. Install heater as per manufacturer's instructions and governing local and national codes.
9. For maximum protection it is suggested that the area between the bottom of the enclosure and the concrete base be caulked with the exception of the "C" panels. **DO NOT CAULK THE BOTTOM OF THE "C" DOOR PANELS.**

REMOVE MASKING FILM IMMEDIATELY AFTER **INSTALLATION**

CONTENTS

Model No. 800-Series
Model No. 800T-Series

- 2- "A" (end) Panels**
- 2- "B-S" (small side) Panels**
- 2- "B-L" (large side) Panels**
- 1- "C" (drain door) Panel**
- 2- "C" (solid access) Panels**
- 1- "D" (roof) Panel**
- 1- "F" (3 ½" side) Post**
- 4- Outside Aluminum Corner Anchoring Brackets (2 ½" x 2 ½")**
- 5- Inside Aluminum Anchoring Brackets (3" x 3")**
- 5- Inside Roof Clips**
- 9- Wedge Anchors**
- 29- Screws**
- 1- Magnetic Chuck**

TOOLS NEEDED

- 1. Hammer**
- 2. Drill**
- 3. 9/16" Wrench**