




This new technology created by Siemens expands the capabilities of the CAFCI by feeding two separate circuits from one breaker position – saving both space in the load center and time in implementation, all while maintaining safety and compliance. This is ideal for new construction or renovations and is available in either Plug-on Neutral or Pigtail versions.

-

SIEMENS

Features

- Expanded capabilities with tandem (twin) AFCI vs. competition: one breaker feeds two circuits to save on space and time
- Allows for smaller load center needs due to combined position use
- Additional space savings: Tandem AFCI minimizes the need for sub-feeding panels
- Trusted indicator flags show when load wires are correctly inserted
- LED trip indicators for ease of troubleshooting
- Quicker installation with load lugs only
- Tandem AFCI are available in pigtail and Plug-on Neutral types
- NEC® 210.12 compliant

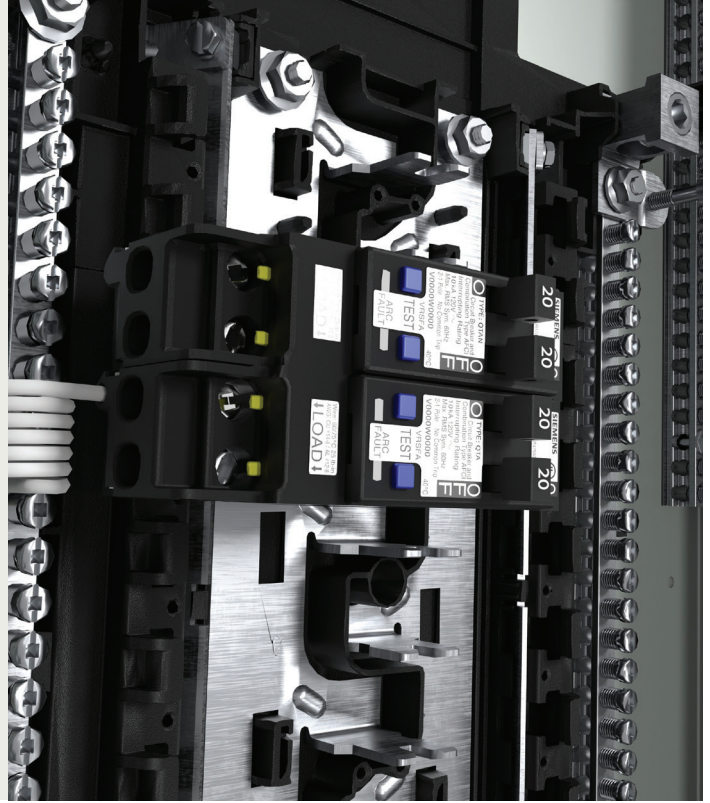

Note: Tandem AFCI breakers without the rejection feature can be installed in any panel that lists this specific breaker type or where a substitution letter exists for that breaker type. The schematic located on the wiring diagram will show the positions where these breakers can be placed by showing two circuits per space. The total circuits listed for panel should not be exceeded.

Tandem Combination Type Arc-Fault Circuit Interrupters (CAFCI)

Catalog Number	Ampere Rating	Interrupting Rating	UL Type	Connection Type
Q1515AFC	15/15	10kA	QTA	Pigtail
Q2020AFC	20/20	10kA	QTA	Pigtail
Q1515AFCN	15/15	10kA	QTAN	Plug-on Neutral
Q2020AFCN	20/20	10kA	QTAN	Plug-on Neutral

Legal Manufacturer

Siemens Industry, Inc.
3617 Parkway Ln
Peachtree Corners, GA 30092
United States of America
Telephone: +1-800-333-7421
www.usa.siemens.com/afci
Order No. RPFL-TCAFC-0921
© 09.2021, Siemens Industry, Inc.

This document contains a general description of available technical options only, and its effectiveness will be subject to specific variables including field conditions and project parameters. Siemens does not make representations, warranties, or assurances as to the accuracy or completeness of the content contained herein. Siemens reserves the right to modify the technology and product specifications in its sole discretion without advance notice.