



Handy/Gang boxes and accessories


Multi-gang handy boxes and drawn-style gang boxes




132-W-1/2




132-W-FB-1/2




132-W-FB-3/4



132-W-AB-1/2



132-W-FBC



134-BW

Multi-gang handy boxes

Cat. No.	Depth (in.)	Capacity (cu. in.)	Description	Std. Ctn.
132-W-1/2	2 ¹ / ₈	30.3	A two-gang box, 2¹/₈" deep – 4" square Three 1/2" KOs in each of four sides and three 1/2" KOs in a line in bottom with two 3/4" KOs at opposite ends in bottom*	25
132-W-FB-1/2	2 ¹ / ₈	30.3	A two-gang box, 2¹/₈" deep – 4" square Three 1/2" KOs in each of three sides, flat bracket on fourth side and five 1/2" KOs in bottom. Flat bracket offset 9/16" from face*	25
132-W-FB-3/4	2 ¹ / ₈	30.3	A two-gang box, 2¹/₈" deep – 4" square Two 3/4" KOs in each of three sides, flat bracket on fourth side and three 1/2" KOs in a line with two 3/4" KOs at opposite ends in bottom. Flat bracket offset 9/16" from face*	25
132-W-AB-1/2	2 ¹ / ₈	30.3	A two-gang box, 2¹/₈" deep – 4" square Three 1/2" KOs in each of three sides, angle bracket on fourth side and five 1/2" KOs in bottom. Bracket offset 9/16" from face*	25
132-W-FBC	2 ¹ / ₈	30.3	For non-metallic cable – a two-gang box, 2¹/₈" deep – 4" square Two loom KOs in each of two opposite sides, two 1/2" KOs in side opposite flat bracket and one 1/2" KO in bottom. Two loom clamps for use on non-metallic sheathed cable with 10/32 deep-slotted screws assembled. Flat bracket offset 9/16" from face*	25
134-BW	2 ¹ / ₈	58.0	A four-gang box Four 1/2" KOs in each side, two 1/2" KOs in each end and ten 1/2" KOs in bottom. Uses Steel City SB-4 cover.	20


*Uses Steel City® SB-2 covers.




2G 1/2 & 3/4




3G 1/2 & 3/4



5G 1/2 & 3/4



H3BD 3/4 1

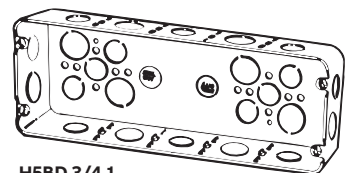

H5BD 3/4 1

Drawn-style gang boxes

Cat. No.	Depth (in.)	Capacity (cu. in.)	Height (in.)	Length (in.)	Each side Conduit (in.)	Each end Conduit (in.)	Knockouts (in.)		Std. Ctn.
							Bottom Conduit (in.)		
With conduit KOs									
2G 1/2 3/4	1 ⁵ / ₈	45.0	4 ¹ / ₂	6 ¹³ / ₁₆	2- ¹ / ₂ , 2- ³ / ₄	1- ¹ / ₂ , 1- ³ / ₄	3- ¹ / ₂ , 2- ³ / ₄		5
3G 1/2 3/4	1 ⁵ / ₈	58.0	4 ¹ / ₂	8 ⁵ / ₈	3- ¹ / ₂ , 2- ³ / ₄	1- ¹ / ₂ , 1- ³ / ₄	6- ¹ / ₂ , 4- ³ / ₄		5
4G 1/2 3/4	1 ⁵ / ₈	70.0	4 ¹ / ₂	10 ⁷ / ₁₆	3- ¹ / ₂ , 3- ³ / ₄	1- ¹ / ₂ , 1- ³ / ₄	6- ¹ / ₂ , 4- ³ / ₄		5
5G 1/2 3/4	1 ⁵ / ₈	85.0	4 ¹ / ₂	12 ¹ / ₄	4- ¹ / ₂ , 3- ³ / ₄	1- ¹ / ₂ , 1- ³ / ₄	6- ¹ / ₂ , 4- ³ / ₄		1
6G 1/2 3/4	1 ⁵ / ₈	95.0	4 ¹ / ₂	14 ¹ / ₁₆	4- ¹ / ₂ , 4- ³ / ₄	1- ¹ / ₂ , 1- ³ / ₄	6- ¹ / ₂ , 4- ³ / ₄		1
H2BD 3/4 1	2 ¹ / ₂	71.0	4 ¹ / ₂	6 ¹³ / ₁₆	2- ³ / ₄ , 1-1	1- ³ / ₄ , 1-1	3- ¹ / ₂ , 2- ³ / ₄		10
H3BD 3/4 1	2 ¹ / ₂	90.0	4 ¹ / ₂	8 ⁵ / ₈	4- ³ / ₄ , 1-1	1- ³ / ₄ , 1-1	6- ¹ / ₂ , 4- ³ / ₄		10
H4BD 3/4 1	2 ¹ / ₂	110.0	4 ¹ / ₂	10 ⁷ / ₁₆	2- ³ / ₄ , 2-1	1- ³ / ₄ , 1-1	6- ¹ / ₂ , 4- ³ / ₄		5
H5BD 3/4 1	2 ¹ / ₂	132.0	4 ¹ / ₂	12 ¹ / ₄	3- ³ / ₄ , 2-1	1- ³ / ₄ , 1-1	6- ¹ / ₂ , 4- ³ / ₄		5
H6BD 3/4 1	2 ¹ / ₂	150.0	4 ¹ / ₂	14 ¹ / ₁₆	3- ³ / ₄ , 3-1	1- ³ / ₄ , 1-1	6- ¹ / ₂ , 4- ³ / ₄		5