


Data sheet | Item number: 706-2300/406-100

System cable; for Siemens S7-300; 8 Analog Current Inputs, Spec. Wiring;
Length: 1 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300_406-100

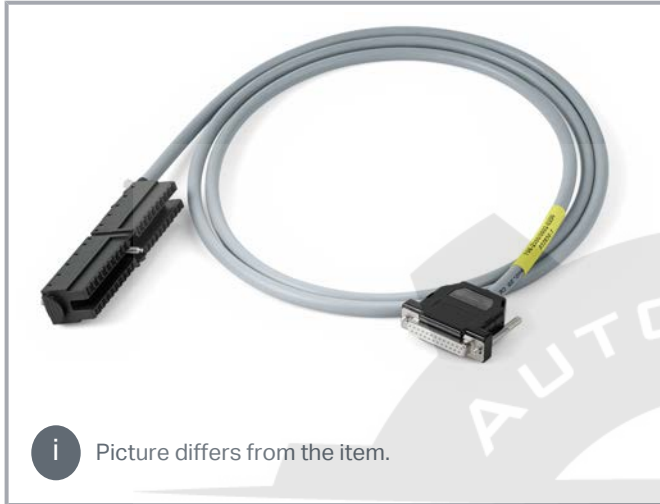

 Picture differs from the item.

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Data

Electrical data

Inputs/outputs	8 analog inputs; current
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Compatible PLC Modules	Siemens S7-300
Compatible PLC I/O Card Types	6ES7 331-7NF10-0AB0
Connection type (1)	System
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	25
Connector 2	Siemens 6ES7-392-1BM00-0AA0

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Cable type	LiYCY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	1 m
--------------	-----

Material data

Weight	999 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Product Group	30 ()
Country of origin	FR
GTIN	4045454881733
Customs tariff number	85444290900

Optional accessories

Interface module

	Item no.: 704-8013
	Interface module for system wiring; with solder pin; Male connector; 25-pole; 8-channel analog input or output; 4-wire; PCB terminal blocks; in mounting carrier www.wago.com/704-8013

Downloads

Documentation

Bid Text

706-2300/406-100 doc - Datei	Feb 9, 2015	doc 26.1 kB	Download
706-2300/406-100 X81 - Datei	Feb 19, 2019	xml 3.2 kB	Download

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf	Download
--	---------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

System Description

WAGO System Wiring, Selection Guide

pdf

Download

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

545.9 kB

CAD files

CAE data

WSCAD Universe 706-2300/406-100

URL

Download

WSCAD Universe 706-2300/406-100

URL

Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-2300/406-100

URL

Download

System cable; for Siemens S7-300; 8 Analog Current Inputs, Spec. Wiring; Length: 1 m; Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.