


Power Mirrors

Switch Test

1. Remove the driver's door panel (see [section 20](#)).
2. Disconnect the connectors and remove the switch assembly from the armrest.

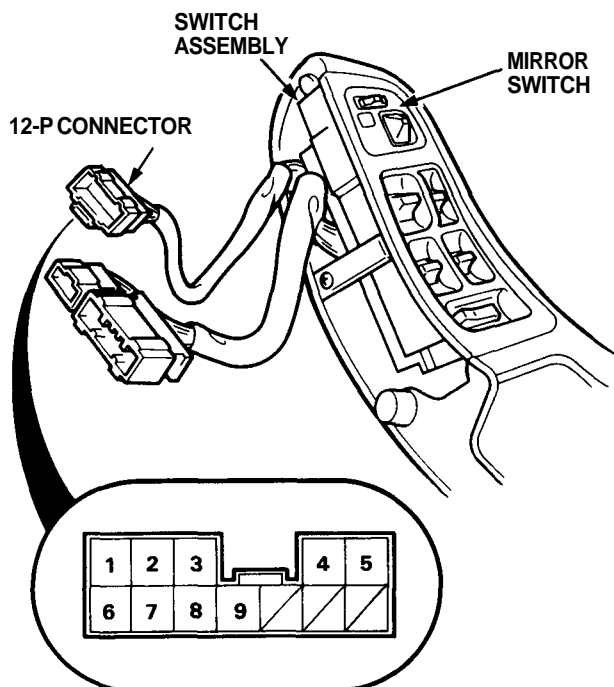

View from wire side

3. Check for continuity between the terminals in each switch position according to the table.

Mirror Switch:

| Terminal | | 4 | 2 | 3 | 5 | 1 | 7 | 6 |
|----------|-------|---|---|---|---|---|---|---|
| Position | | | | | | | | |
| R | OFF | ○ | | ○ | ○ | | | ○ |
| | UP | | | ○ | | | ○ | |
| | DOWN | ○ | | | ○ | | ○ | |
| | LEFT | | | ○ | | | ○ | |
| | RIGHT | ○ | | | | | ○ | |
| | | | | | | | | |
| L | OFF | | ○ | ○ | | ○ | | ○ |
| | UP | | | ○ | | | ○ | |
| | DOWN | | ○ | | | | ○ | |
| | LEFT | | | ○ | | | ○ | |
| | RIGHT | | ○ | | | | ○ | |
| | | | | | | | | |

Defogger Switch:

| Terminal | 6 | | 8 | 9 |
|----------|---|---|---|---|
| Position | | | | |
| ON | ○ | ○ | ○ | ○ |
| OFF | | | | |

