


Data sheet | Item number: 706-2300/406-200

System cable; for Siemens S7-300; 8 Analog Current Inputs, Spec. Wiring;
Length: 2 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300_406-200

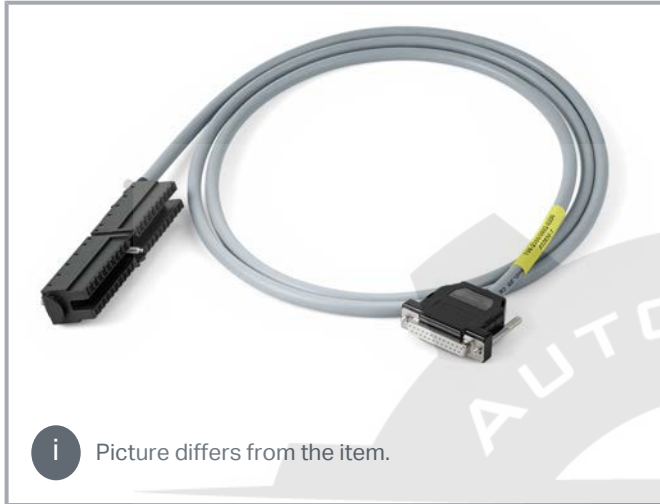

 Picture differs from the item.

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Data

Electrical data

Inputs/outputs	8 analog inputs; current
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Compatible PLC Modules	Siemens S7-300
Compatible PLC I/O Card Types	6ES7 331-7NF10-0AB0
Connection type (1)	System
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	25
Connector 2	Siemens 6ES7-392-1BM00-0AA0

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Cable type	LiYCY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	2 m
--------------	-----

Material data

Weight	359 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Product Group	30 ()
Country of origin	FR
GTIN	4045454881740
Customs tariff number	85444290900

Optional accessories

Interface module

	Item no.: 704-8013 Interface module for system wiring; with solder pin; Male connector; 25-pole; 8-channel analog input or output; 4-wire; PCB terminal blocks; in mounting carrier	www.wago.com/704-8013
---	---	--

Downloads

Documentation

Bid Text

706-2300/406-200 X81 - Datei	Feb 19, 2019	xml 3.2 kB	Download
706-2300/406-200 doc - Datei	Feb 9, 2015	doc 26.6 kB	Download

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf	Download
--	---------	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

System Description

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB
[Download](#)

CAD files

CAE data

WSCAD Universe 706-2300/406-200

URL
[Download](#)

WSCAD Universe 706-2300/406-200

URL
[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-2300/406-200

URL
[Download](#)

System cable; for Siemens S7-300; 8 Analog Current Inputs, Spec. Wiring; Length: 2 m; Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.