


Data sheet | Item number: 706-2300/500-100

System cable; for Siemens S7-300; 4 analog outputs (current); Length: 1 m;
Conductor cross-section: 0.25 mm²

www.wago.com/706-2300_500-100

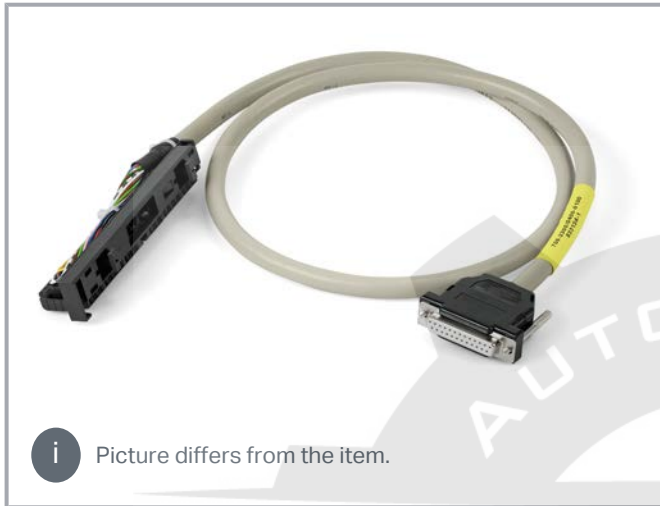

 Picture differs from the item.

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Data

Electrical data

Inputs/outputs	4 analog outputs; current
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Compatible PLC Modules	Siemens S7-300
Compatible PLC I/O Card Types	6ES7 332-5HB01-0AB0 6ES7 332-5HB81-0AB0 6ES7 332-5HD01-0AB0 6ES7 332-7ND02-0AB0
Connection type (1)	System
Pluggable connectors	D-sub female connector
Connection type 2	System

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Pole number 2	15
Connector 2	Siemens 6ES7-392-1BJ00-0AA0
Cable type	LiYCY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	1 m
--------------	-----

Material data

Weight	147 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Product Group	30 ()
Country of origin	FR
GTIN	4045454873974
Customs tariff number	85444290900

Optional accessories

Interface module

	Item no.: 704-8012
	Interface module for system wiring; with solder pin; Male connector; 15-pole; 4-channel analog input or output; 4-wire; PCB terminal blocks; in mounting carrier www.wago.com/704-8012

Downloads

Documentation

Bid Text

706-2300/500-100	Feb 9, 2015	doc	Download
doc - Datei		26.6 kB	
706-2300/500-100	Feb 19, 2019	xml	Download
X81 - Datei		3.2 kB	

Additional Information

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
 Germantown, WI 53022
 Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
 Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
 We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Disposal; Electrical and electronic equipment, Packaging

V 1.0.0

pdf
265.8 kB[Download](#)

System Description

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB[Download](#)

CAD files

CAE data

WSCAD Universe 706-2300/500-100

URL

[Download](#)

WSCAD Universe 706-2300/500-100

URL

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-2300/500-100

URL

[Download](#)

System cable; for Siemens S7-300; 4 analog outputs (current); Length: 1 m;
Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.