


Data sheet | Item number: 706-3033/102-200

System cable; for Schneider Modicon TM3; 8 digital inputs for higher voltages; Length: 2 m; Conductor cross-section: 0.34 mm²

www.wago.com/706-3033_102-200

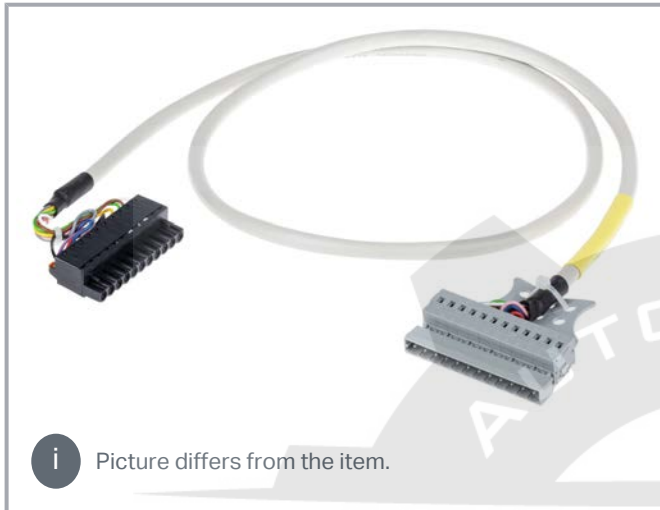

Item description

Note:

If less than 3 channels used at the same time, the maximum current per wire 2 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L. If more than 3 channels used at the same time, the maximum current per wire 0.75 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L.

Data

Electrical data

Inputs/outputs	8 digital inputs; for higher voltages
Operating voltage	≤ AC/DC 250 V
Current per wire (max.)	0.75 A

Connection data

Compatible PLC Modules	Schneider Modicon TM3
Compatible PLC I/O Card Types	TM3 DI8A
Connection type (1)	System
Pole number 1	12
Pluggable connectors	WAGO 231 Series
Connection type 2	System

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



Pole number 2	11
Connector 2	TM3 DI8A
Cable type	LIYY
Wire cross-section	0.34 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	2 m
--------------	-----

Material data

Weight	225 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

Packaging type	bag
Country of origin	FR
GTIN	4055143627955
Customs tariff number	85444290900

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf
545.9 kB

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3033/102-200	URL	Download
System cable; for Schneider Modicon TM3; 8 digital inputs for higher voltages; Length: 2 m; Conductor cross-section: 0.34 mm ²		

Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

Installation Notes



Subject to changes. Please also observe the further product documentation!

WAGO Corporation
Germantown, WI 53022
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.us

Do you have any questions about our products?
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.