


## Data sheet | Item number: 706-3340/201-200

System cable; for Schneider Modicon M340; 16 digital outputs for higher voltages, version 1; Length: 2 m; Conductor cross-section: 0.34 mm<sup>2</sup>

[www.wago.com/706-3340\\_201-200](http://www.wago.com/706-3340_201-200)

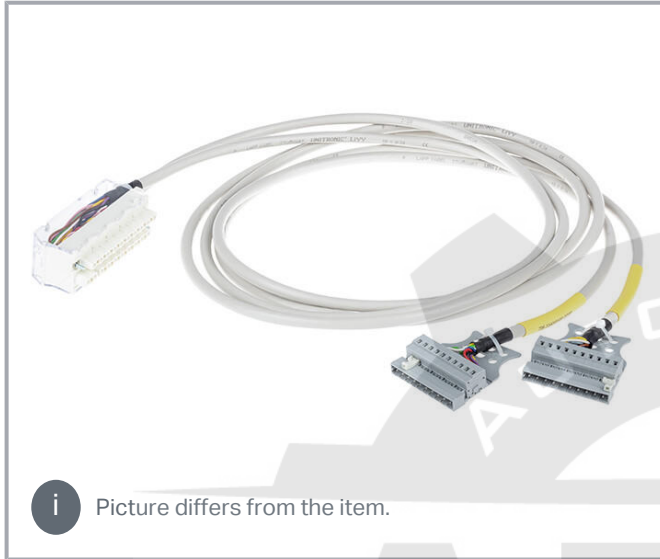

### Item description

#### Note:

If less than 3 channels used at the same time, the maximum current per wire 2 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L. If more than 3 channels used at the same time, the maximum current per wire 0.75 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L.

### Data

#### Electrical data

|                         |                                         |
|-------------------------|-----------------------------------------|
| Inputs/outputs          | 16 digital outputs; for higher voltages |
| Operating voltage       | ≤ AC/DC 250 V                           |
| Current per wire (max.) | 0.75 A                                  |

#### Connection data

|                               |                        |
|-------------------------------|------------------------|
| Compatible PLC Modules        | Schneider Modicon M340 |
| Compatible PLC I/O Card Types | BMX DRA 1605           |
| Connection type (1)           | System                 |
| Pole number 1                 | 10                     |

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.



|                      |                      |
|----------------------|----------------------|
| Pluggable connectors | WAGO 231 Series      |
| Connection type 2    | System               |
| Pole number 2        | 10                   |
| Connector 2          | WAGO 231 Series      |
| Connection type (3)  | System               |
| Connector 3          | Schneider BMXFTB2020 |
| Cable type           | LiYY                 |
| Wire cross-section   | 0.34 mm <sup>2</sup> |
| Color code           | per DIN VDE 47100    |

## Physical data

|              |     |
|--------------|-----|
| Cable length | 2 m |
|--------------|-----|

## Material data

|        |       |
|--------|-------|
| Weight | 475 g |
|--------|-------|

## Environmental requirements

|                                         |               |
|-----------------------------------------|---------------|
| Surrounding air temperature (operation) | -20 ... 50 °C |
|-----------------------------------------|---------------|

## Commercial data

|                       |               |
|-----------------------|---------------|
| Packaging type        | bag           |
| Country of origin     | FR            |
| GTIN                  | 4055143637794 |
| Customs tariff number | 85444290900   |

## Downloads

### Documentation

#### System Description

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf  
545.9 kB

[Download](#)

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 706-3340/201-200

Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.

System cable; for Schneider Modicon M340; 16 digital outputs for higher voltages,  
version 1; Length: 2 m; Conductor cross-section: 0.34 mm<sup>2</sup>

---

## Installation Notes



Subject to changes. Please also observe the further product documentation!

WAGO Corporation  
Germantown, WI 53022  
Phone: 1-800-DIN-RAIL (346-7245) | Fax: (262) 255-6222  
Email: [info.us@wago.com](mailto:info.us@wago.com) | Web: [www.wago.us](http://www.wago.us)

Do you have any questions about our products?  
We are always happy to take your call at (262) 255-6222 or 1 800-DIN-RAIL.