
## **INSTALLATION GUIDE:**

## **Vertical Linear Integrated LED**


Wall Mount LED Linear Lighting

## VVL12CCT / VLV13CCT / VVL14CCT






## **TOOLS YOU MAY NEED**





FOR YOUR SAFETY, READ AND UNDERSTAND FOLLOW INSTRUCTIONS! KEEP THE INSTRUCTIONS IN SAFE PLACE FOR FUTURE REFERENCE!

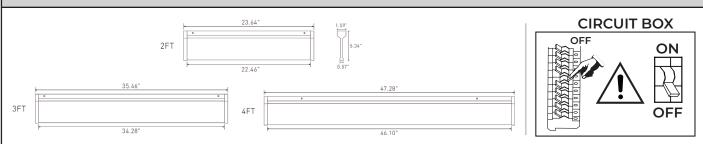

## LED INFO & WARNINGS Please read and understand the entire manual Make sure that you have all necessary parts by checking the parts list. If any part is missing or before attempting to assemble, operate, or install the product. damaged please contact VONN LIGHTING CUSTOMER SERVICE at 888-604-8666 for a replacement. All parts must be used as indicated in these Inspect the LED fixture prior to installation to make instructions. Do not substitute any parts, leave sure that it has not been damaged during shipping. parts out, or use any parts that are worn or broken. Please handle the LED light with care when VONN highly recommends to use a qualified, licensed electrician to install the fixture. unpacking. Do not apply pressure to the LED's, do not open any factory sealed compartments, and do not touch the LEDs with your hands. **VONN** recommends to install the fixture on Do not remove or replace VONN manufactured its own independent circuit. Dd not install the parts that is provided with the fixture. fixture on the same circuit with the other appliances, or HVAC systems. Place the wall switch in the "OFF" position of the Shut "OFF" the electricity at main fuse box. room you are installing the fixture.



# **Instructions**



WALL MOUNT LED

ARCHITECTURAL LED LUMINAIRE INSTALLATION INSTRUCTION

RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

### **IMPORTANT**

- 1. Read all instructions.
- 2. Install in accordance with national and local electrical code regulations.
- 3. This product is intended to be installed and serviced by a qualified, licensed electrician.
- 4. Do not install in wet locations. For dry and damp
- 5. Turn off electrical power before installing or servicing fixture in any way.

  6. To reduce the risk of fire and overheating, make
- sure all connections are tight.
- 7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.

## **ACCESSORY**







Screw PA4X30


Anchor







WIRING







Please isolate two dimming wires by P2 terminal individually if no need dimming; MUST connect wires with corresponding colors as shown.




## SHOCK HAZARD!

May result in serious injury or death. Turn power OFF at circuit breaker prior to installation or servicing.

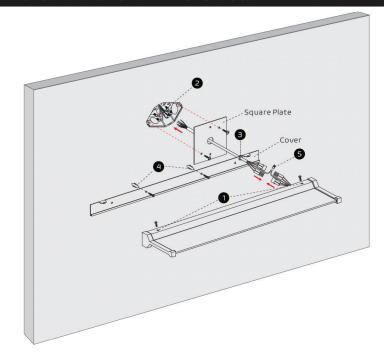








## **INSTALLATION STEPS**

- 1 Take off the cover by screwdriver.
- 2 Connect the wires of power cable (provided) with junction box by the wiring caps. Cover the junction box with square plate and fix it with screws, then plaster.
- 3 Insert the power cord into the opening of cover as shown.
- 4 Fix the cover in the ceiling.

Ceiling Type

**Mounting Point** 





Hole Diameter: 0.20"

- 5 Connect wires by quick connectors and wiring caps, then hide all wires into the junction box.
- 6 Fix led luminaire on the cover with screws.

Wattage & CCT Adjustable By Dip Switch

I	Length	High	Medium	Low
	3'	4000lm	3000lm	2000lm
	4'	4000lm	3000lm	2000lm