

Caterlite

Water Boiler Instruction manual



Model:
J709-A / J722-A

Safety Tips

- Position on a flat, stable surface.
- A service agent/qualified technician should carry out installation and any repairs if required. Do not remove any components on this product.
- Consult Local and National Standards to comply with the following:
 - Health and Safety at Work Legislation
 - Fire Precautions
 - Wiring Regulations
 - Building Regulations
- Ensure the location for the appliance can support its weight when full.
- DO NOT fill the appliance above the 'MAX' level.
- DO NOT move the appliance when full.
- DO NOT immerse the appliance in water.
- DO NOT leave the machine unattended during operation.
- DO NOT operate this appliance when less than one third full.
- DO NOT touch the outer surfaces of the appliance. They become hot during use.
- Suitable for indoor use only.
- Always switch off and disconnect the power supply to the appliance when not in use.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.
- Caterlite recommend that this appliance should be periodically tested (at least annually) by a Competent Person. Testing should include, but not be limited to: Visual Inspection, Polarity Test, Earth Continuity, Insulation Continuity and Functional Testing.

- Keep all packaging away from children. Dispose of the packaging in accordance to the regulations of local authorities.
- If the power cord is damaged, it must be replaced by a Caterlite agent or a recommended qualified technician in order to avoid a hazard.

Product Description

- J709 - 8 litre Water Boiler
- J722 - 20 litre Water Boiler

Introduction

Please take a few moments to carefully read through this manual. Correct maintenance and operation of this machine will provide the best possible performance from your Caterlite product.

Pack Contents

The following is included:

- Caterlite Water Boiler
- Instruction manual

Caterlite prides itself on quality and service, ensuring that at the time of packaging the contents are supplied fully functional and free of damage.

Should you find any damage as a result of transit, please contact your Caterlite dealer immediately.

Operation

1. Remove the appliance from the packaging. Make sure that all protective plastic film and plastic coatings are thoroughly removed from all surfaces.




Note: Before using for the first time, clean the interior of the appliance and all parts in warm soapy water, then rinse thoroughly.

2. Ensure the Temperature Control knob is set to '0'.
3. Remove the lid and fill the appliance to at least half of its capacity.
4. Replace the lid. Twist to lock.
5. Connect to the mains power supply and turn the power switch On (I). The Power Indicator light illuminates.
6. Set the Temperature Control knob to the required temperature. The HEATING Indicator illuminates and the appliance heats the water.



WARNING: Reduce the set temperature if the water begins to boil. DO NOT allow the water to boil constantly.

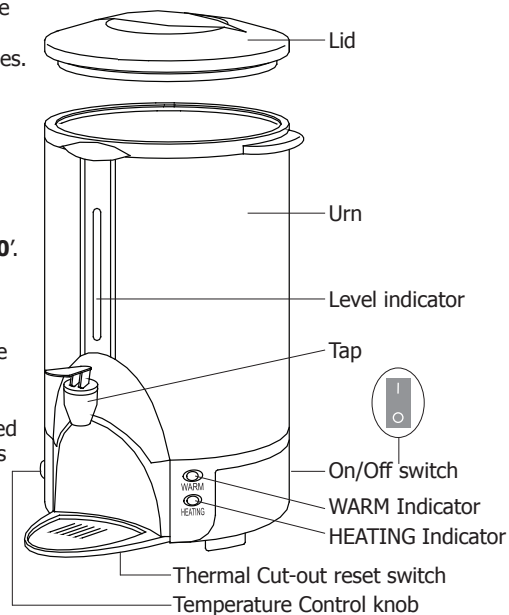

7. When the water has reached the set temperature the 'WARM' light illuminates and the water is ready to be dispensed.



Note: Once the water temperature drops 5-10°C then the appliance will reheat the water.

Serving

1. Place a suitable vessel beneath the tap.
2. Pull the tap towards you to begin dispensing.
3. Raise the tap handle to close the tap.

Emptying the Appliance

Drain the appliance by using the tap to empty.

Thermal Cut-Out Reset

This appliance is fitted with a Thermal Cut-Out safety feature. Should the temperature exceed safe levels the appliance will automatically cut power.

The Safety Cut-out switch is located on the underside of the appliance. To reset the appliance:

1. Empty the appliance and allow to cool.
2. Press the reset button until it clicks.



WARNING: Ensure the appliance has cooled down and is empty before resetting the switch, as it may need to be tipped slightly to gain access to the switch.

3. The appliance is now reset and can be used as normal.

Cleaning, Care & Maintenance

- **Always turn off and disconnect the appliance from the power supply before cleaning.**
- Use soapy water and a damp cloth to clean the exterior of the appliance.
- Dry thoroughly after cleaning.

De-scaling

In hard water areas limescale can build up within the appliance after prolonged use. For best taste and extended appliance life, de-scale it regularly. Installation of a water filtration system is also recommended. To de-scale the appliance:

1. Pour a solution of de-scaler and water into the appliance.
2. Brush the interior gently with a soft bristled brush.
3. Discard the solution collected in the jug.
4. Fill the appliance with clean water and turn back On to flush out the system. Flush out the system thoroughly to remove any de-scaler residue.
5. The appliance is now ready for use.



Note: Use a suitable de-scaler and always follow the instructions on the packaging.

Caterlite recommend that this appliance is de-scaled every 3 months or more frequently in hard water areas.

IMPORTANT: Failure to de-scale or maintain will invalidate your guarantee.

Troubleshooting

Fault	Probable Cause	Solution
The unit is not working	The unit is not switched on	Check the unit is plugged in correctly and switched on
	Plug and lead are damaged	Call Caterlite agent or qualified technician
	Power supply	Check power supply
	Internal wiring fault	Call Caterlite agent or qualified technician
	Thermal cut-out switch has activated	Reset Thermal cut-out switch (Page 4)
Power light comes on but water does not reach temperature	Thermostat fault	Call Caterlite agent or qualified technician
Heating time has increased	Buildup of scale	De-scale the appliance
The tap is leaking	The tap has become loose	Tighten the tap handle

Technical Specifications

Model	Voltage	Power	Current	Capacity	Weight (full)	Approx. Heating Time (Max. Temp. when full)	Dimensions H x W x D mm
J709-A	230-240V 50Hz	1800W	7.8A	8 litres	11.5kg	30 minutes	430 x 247 x 333
J722-A	230-240V 50Hz	2000W	9.6A	20 litres	24.1kg	40 minutes	560 x 304 x 387

Electrical Wiring

The plug is to be connected to a suitable mains socket.

This appliance is wired as follows:

- Live wire (coloured brown) to terminal marked L
- Neutral wire (coloured blue) to terminal marked N
- Earth wire (coloured green/yellow) to terminal marked E

This appliance must be earthed.



If in doubt consult a qualified electrician.

Electrical isolation points must be kept clear of any obstructions. In the event of any emergency disconnection being required they must be readily accessible.

Compliance

The product must not be disposed of as household waste. To help prevent possible harm to human health and/or the environment, the product must be disposed of in an approved and environmentally safe recycling process. For further information on how to dispose of this product correctly, contact the product supplier, or the local authority responsible for waste disposal in your area.

Caterlite parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities.

Caterlite products have been approved to carry the following symbol:



All rights reserved. No part of these instructions may be produced or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written permission of Caterlite.

Every effort is made to ensure all details are correct at the time of going to press, however, Caterlite reserves the right to change specifications without notice.

DECLARATION OF CONFORMITY

• Conformiteitsverklaring • Déclaration de conformité • Konformitätserklärung
• Dichiarazione di conformità • Declaración de conformidad • Declaração de conformidade

UK:

This product is UKCA marked to demonstrate compliance with the applicable requirements of the conformity assessment procedure(s).

A Declaration of conformity may be found at {URL & QR code} or by scanning the QR code below.

EU:

(NL) Dit product heeft een CE-markering om aan te tonen dat het voldoet aan de toepasselijke eisen van de conformiteitsbeoordelingsprocedure(s).

Een conformiteitsverklaring kan worden gevonden op {URL & QR-code} of door de QR-code hieronder te scannen.

(FR) Ce produit est marqué CE pour démontrer sa conformité aux exigences applicables des procédures d'évaluation de la conformité.

Une déclaration de conformité est disponible à l'adresse {URL & QR code}. Vous pouvez également accéder à la déclaration de conformité en scannant le code QR ci-dessous.

(DE) Dieses Produkt ist CE-gekennzeichnet, um die Einhaltung der geltenden Anforderungen der Konformitätsbewertungsverfahren nachzuweisen.

Eine Konformitätserklärung finden Sie unter {URL & QR-Code} oder durch Scannen des folgenden QR-Codes.

(IT) Questo prodotto è marcato CE per dimostrare il rispetto dei requisiti in vigore in merito alle procedure di valutazione della conformità.

È possibile trovare la dichiarazione di conformità collegandosi all'indirizzo {URL e codice QR} o scansionando il codice QR di seguito.

(ES) Este producto lleva la marca CE para demostrar el cumplimiento de los Requisitos Aplicables del/los procedimiento(s) de Evaluación de la Conformidad.

Puede encontrar una Declaración de Conformidad en {URL y Código QR} o escaneando el siguiente Código QR.

(PT) Este produto tem a marca CE para demonstrar a sua conformidade com os requisitos aplicáveis do(s) procedimento(s) de avaliação de conformidade.

Poderá encontrar a Declaração de Conformidade em {URL e Código QR} ou lendo o código QR abaixo.

ANZ:

This product is RCM marked to demonstrate compliance with the applicable requirements of the conformity assessment procedure(s).

A Declaration of conformity may be found at {URL & QR code} or by scanning the QR code below.

UK
CA



<http://productip.com/?f=6ed3f>

Caterlite

J709-A_J722-A_A5_v3_20201223