



Congratulations on downloading Call Truth!

This powerful application enables you to manage your incoming calls with three modes—Reject All, Handsfree and AnswerOne.

- Reject All mode enables you to send busy signal to all incoming callers,
- Handsfree mode enables you to answer all calls automatically after a selected number of rings, from zero ring (silently) to ten rings, and
-

AnswerOne mode enables you to automatically answer an incoming call from a pre-defined number silently or after a number of pre-defined rings.

In all modes you have the capability to change the number of rings at any time.

This application is purely software based and does not require any hardware tweaking.

With AnswerOne mode you can dial in at any time from a pre-defined number to your phone and “listen in” to conversation to find out what is happening around your phone. This feature is built around the increasing need of people such as:

Employers — who need to find out what employees are doing during sales calls or at the workplace. Parents — who need to keep a tab on their children. Spouses – to find out where they are and what they are upto.

The first screen that is displayed when you launch the application is:



Fig1: Main Screen

This screen shows the applications state. Four dynamic values are shown, which are:

- 1 Status: Displays if Call Magic is active (Enabled) or inactive (Disabled).
- 2 Mode: Three modes are provided in this application – Reject All, Handsfree, Answer One. The Mode can be one of the three answer modes or none, if the application is not active.
- 3 Number: Displays incoming number(s) from whom Call Truth will activate the mode.
- 4 Rings: Displays number of rings before an incoming call will be automatically picked up or sent the busy signal.

Definition of Modes:

- 1 **Reject All:** This mode will send Busy Signal to all incoming callers. You have the option to select after how many rings you would like to send the busy signal to incoming callers. The calling party nor you will get charged for sending the busy signal.
- 2 **Handsfree:** This mode will enable the phone to auto answer all incoming calls after the number of rings defined by you. This can be used when you are driving and would like to have the phone auto-answer after X amount of rings or zero ring (i.e. phone will not ring at all, it will simply answer).
- 3 **Answer One:** This will mode will enable to phone to auto-answer an incoming call from a pre-defined number after the number of rings that you set. You can also set the number of rings to zero so that the call is answered silently.

Activating and Deactivating Call Truth

To Activate Call Magic, goto main screen of application, Select Options > Activate & Hide. (See Figure 2)

The Activate & Hide option will automatically be displayed as Hide when the application is already active. Hide button will send the application to the background where it will be running silently, looking out for incoming calls.

To Deactivate Call Truth, goto main screen of application, Select Options > Deactivate & Exit. (See Figure 3)



Fig. 2: Activate and hide



Fig. 3: Deactivate and hide

- From the main screen of the application, Select Options > Mode > Reject All. This will open a screen which will ask you “Number of Rings” Click Options > Change, to enter the settings. (See Fig. 4 and 5)



Fig.4: Select mode



Fig. 5: Select Reject All

- To enter Number of rings (after which the phone should send the busy signal to all incoming callers), move your joystick or arrow keys till you achieve the desired number of rings. (See Figure 6)

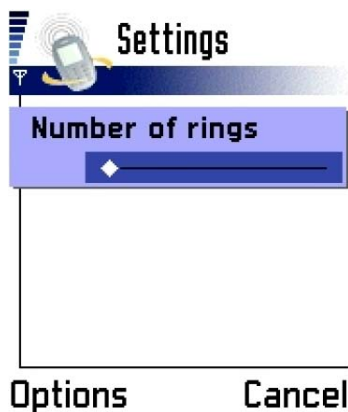


Fig.6: Select rings

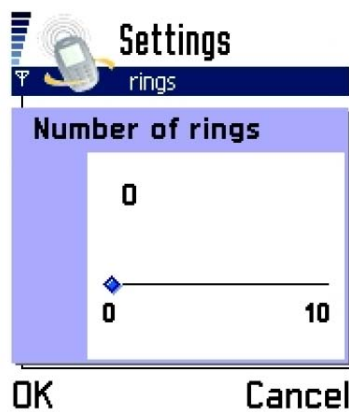


Fig.7: Select number of rings



Fig.8: Save Settings

- Select OK when you are done. (See Figure 7)
- Select Options > Save Settings to save the changes. (See Figure 8) (Clicking Cancel will not save settings)

- From the main screen of the application, Select Options > Mode > Answer One. This will open a screen which will ask you “Number of Rings” and “Set Number”. (See Figure 9)
- Select which setting you would like to edit, and Click Options > Change to enter the settings.
- If you selected, “Number of rings”, then the screen will ask you to set the number of rings. To set Number of rings (after which the phone should send the busy signal to all incoming callers), move your joystick or arrow keys till you achieve the desired number of rings. (See Figure 7)
- Click OK when you are done.
- If you have selected “Set Number” then you will be asked to enter the number. Enter phone number. (See Figure 10)
- Select OK when you are done.
- Select Options > Save Settings to save the changes. (See Figure 11)

This will bring you back to the main screen of the application. Please check the Application Statistics being displayed on the screen to verify if your settings have been accepted by the application.



Fig.9: Edit Number



Fig.10: Enter Number



Fig.11: Save Settings