


Finding your way with Mapkit & Solr

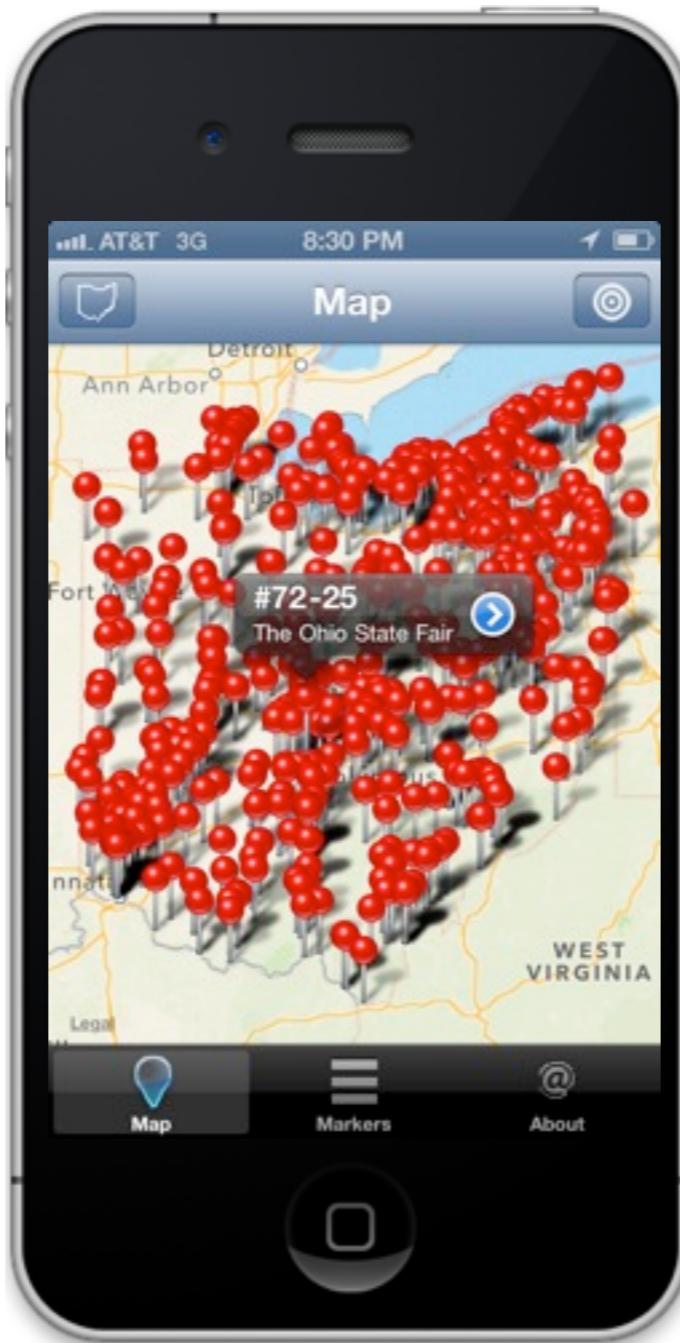

Christopher M. Judd
Judd Solutions

Christopher M. Judd

President/Consultant of **Judd Solutions**







Central Ohio Java Users Group leader

Columbus



Developer User Group (CIDUG)

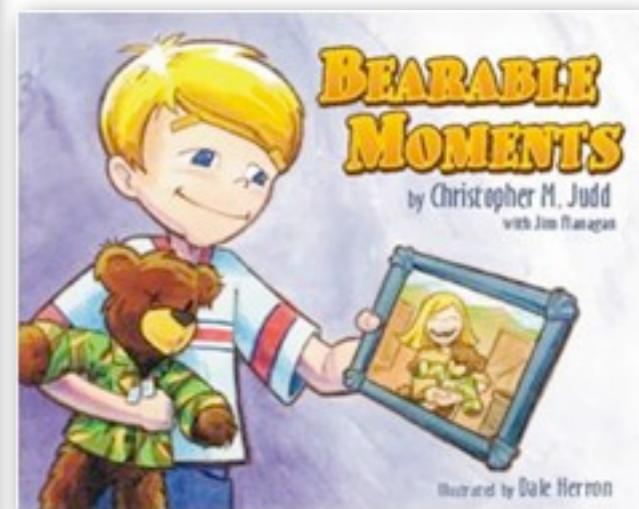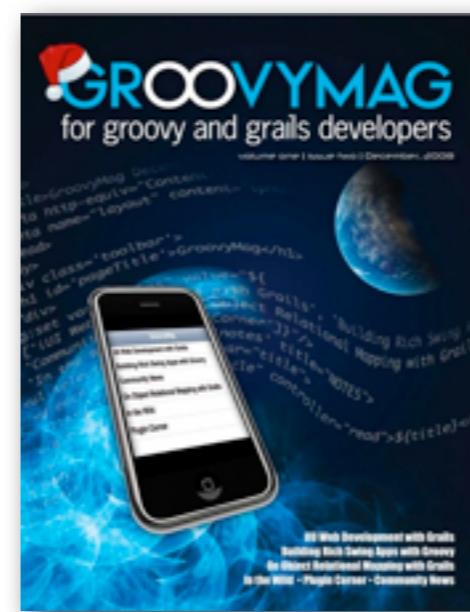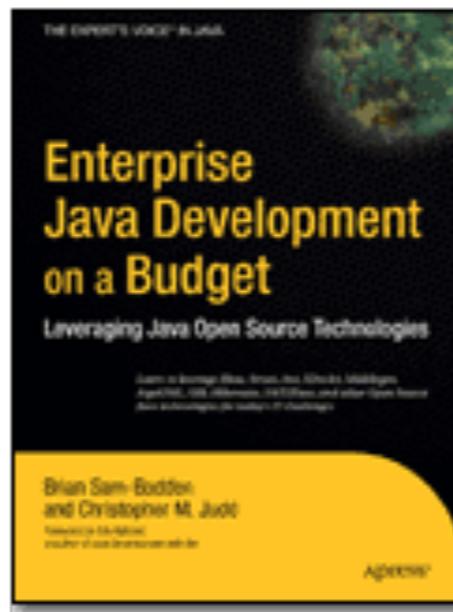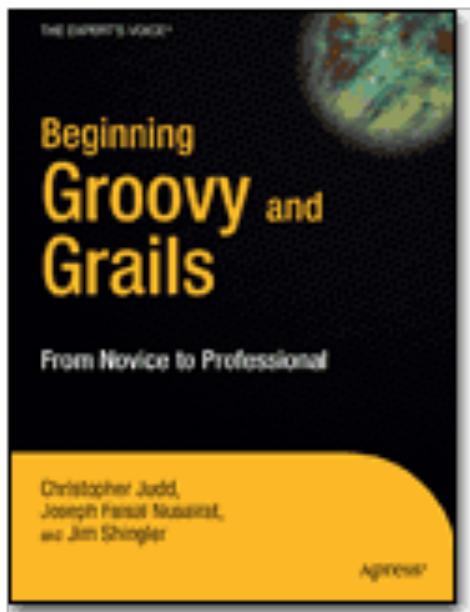



Columbus History Map Source

github SOCIAL CODING

cjudd | Dashboard | Inbox | Account Settings | Log Out

Explore GitHub Gist Blog Help Search...

cjudd / ColumbusHistoryMap_iOS

Source Commits Network Pull Requests (0) Fork Queue Issues (0) Wiki (0) Graphs Branch: master

Switch Branches (1) Switch Tags (0) Branch List

Example iOS application using MapKit – [Read more](#)
click here to add a homepage

Downloads


SSH HTTP Git Read-Only git@github.com:cjudd/ColumbusHistoryMap_iOS.git This URL has **Read+Write** access

Removed specific user setting folder.
cjudd (author) about 22 hours ago

commit b042c5ad91f8497a0dfa
tree a8c7ff36a0aa7a6d76e8
parent a18ea8ac8e032bf21fb9

[ColumbusHistoryMap_iOS /](#)


name	age	message	history
Classes/	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
ColumbusHistoryMap.xcodeproj/	about 22 hours ago	Removed specific user setting folder. [cjudd]	
ColumbusHistoryMap-Info.plist	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
ColumbusHistoryMapViewController.xib	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
ColumbusHistoryMap_Prefix.pch	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
MainWindow.xib	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
README	about 23 hours ago	initial commit [cjudd]	
history.png	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
libisimulate.a	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
main.m	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	

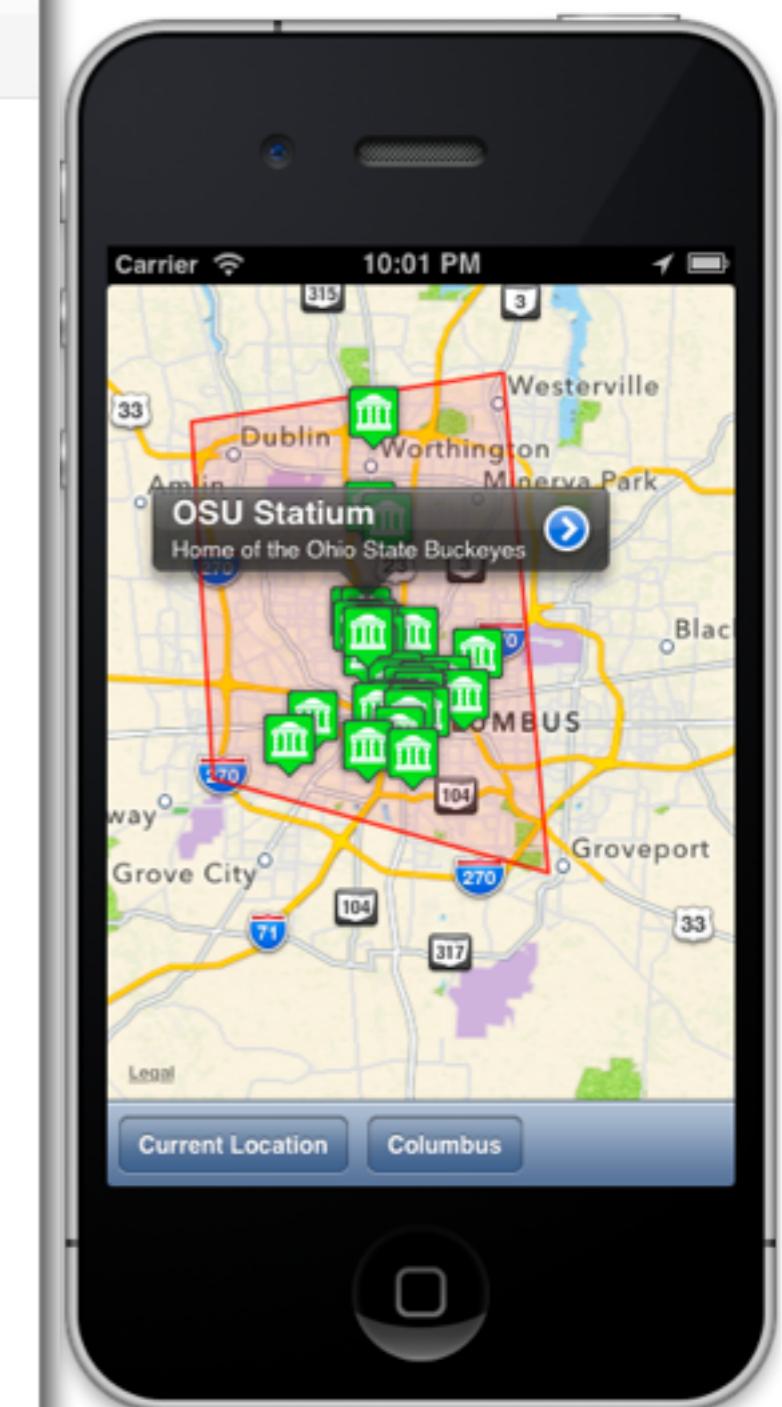


https://github.com/cjudd/ColumbusHistoryMap_iOS

MapKit Basics

MapKit

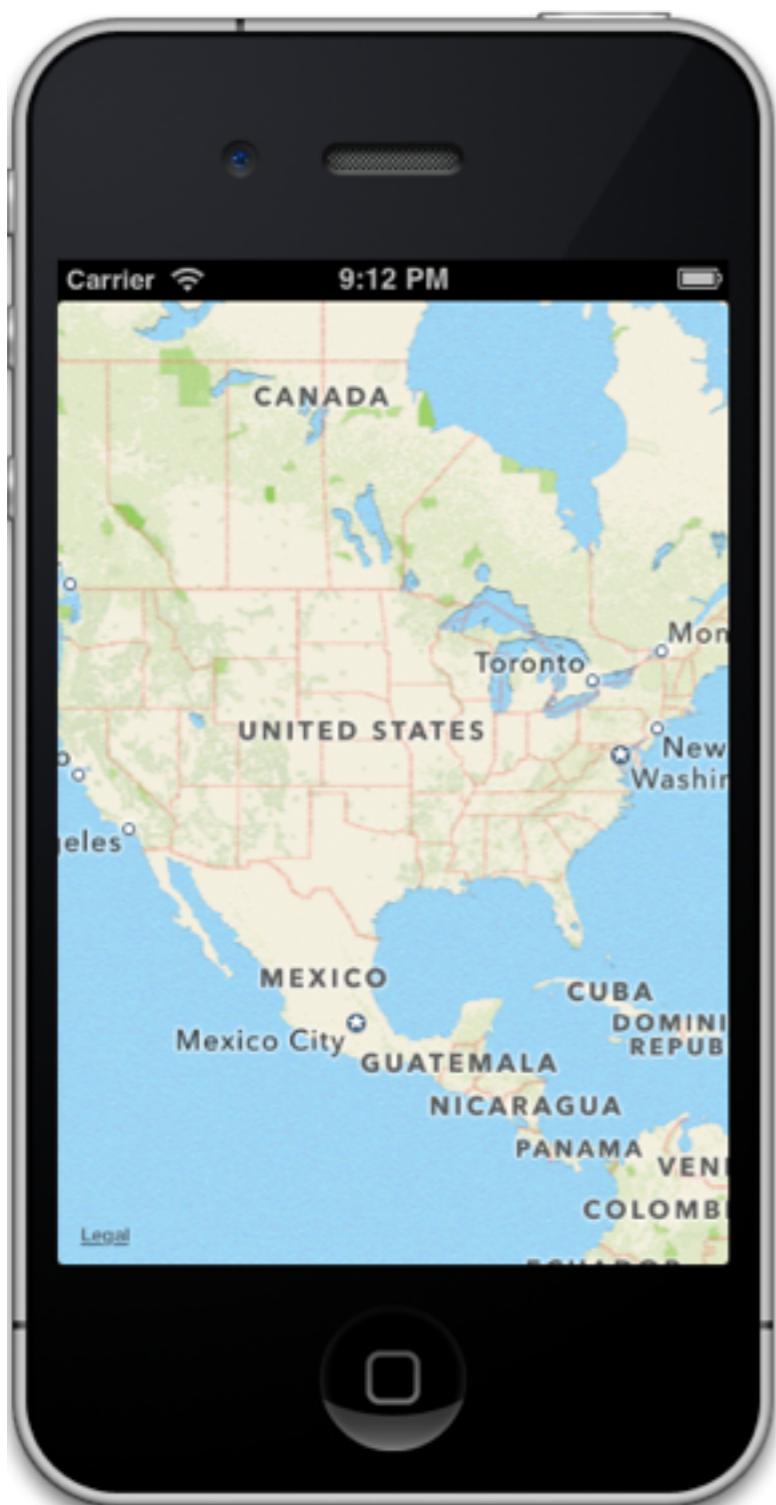


MKMapView

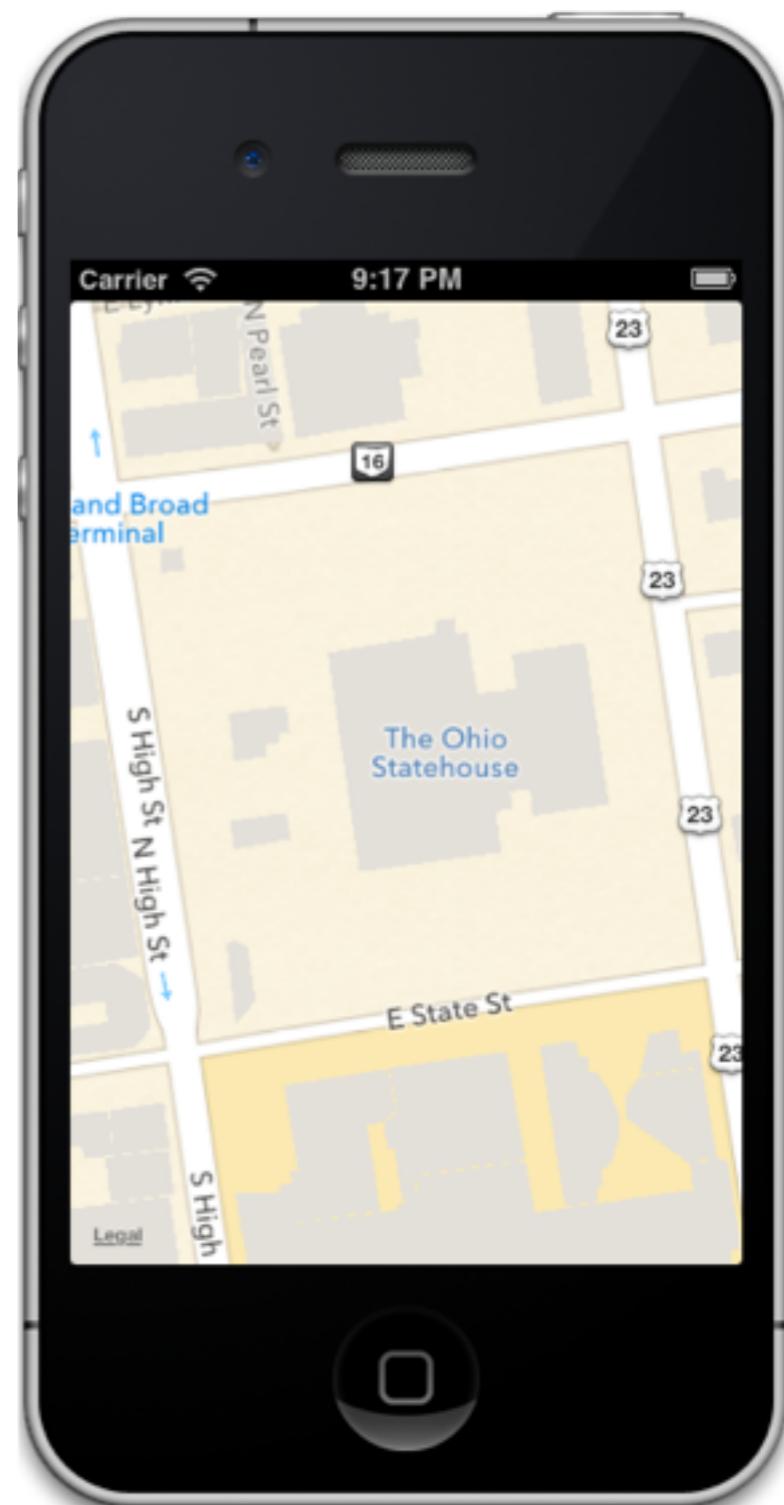

Google maps

Current Location

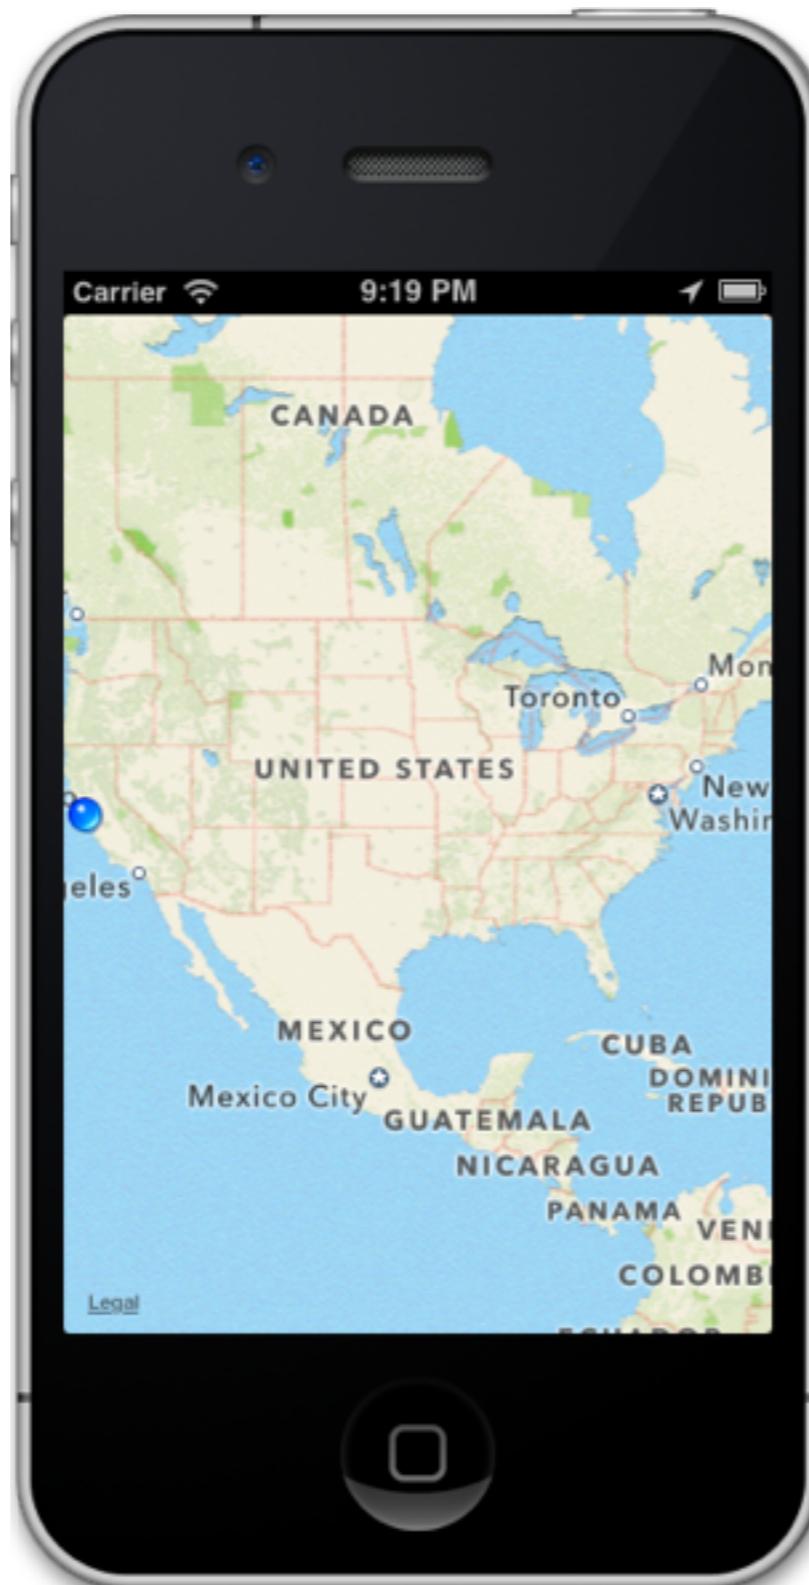

1 kilometer




100 meters




10 meters

Core Location Framework


Map Types

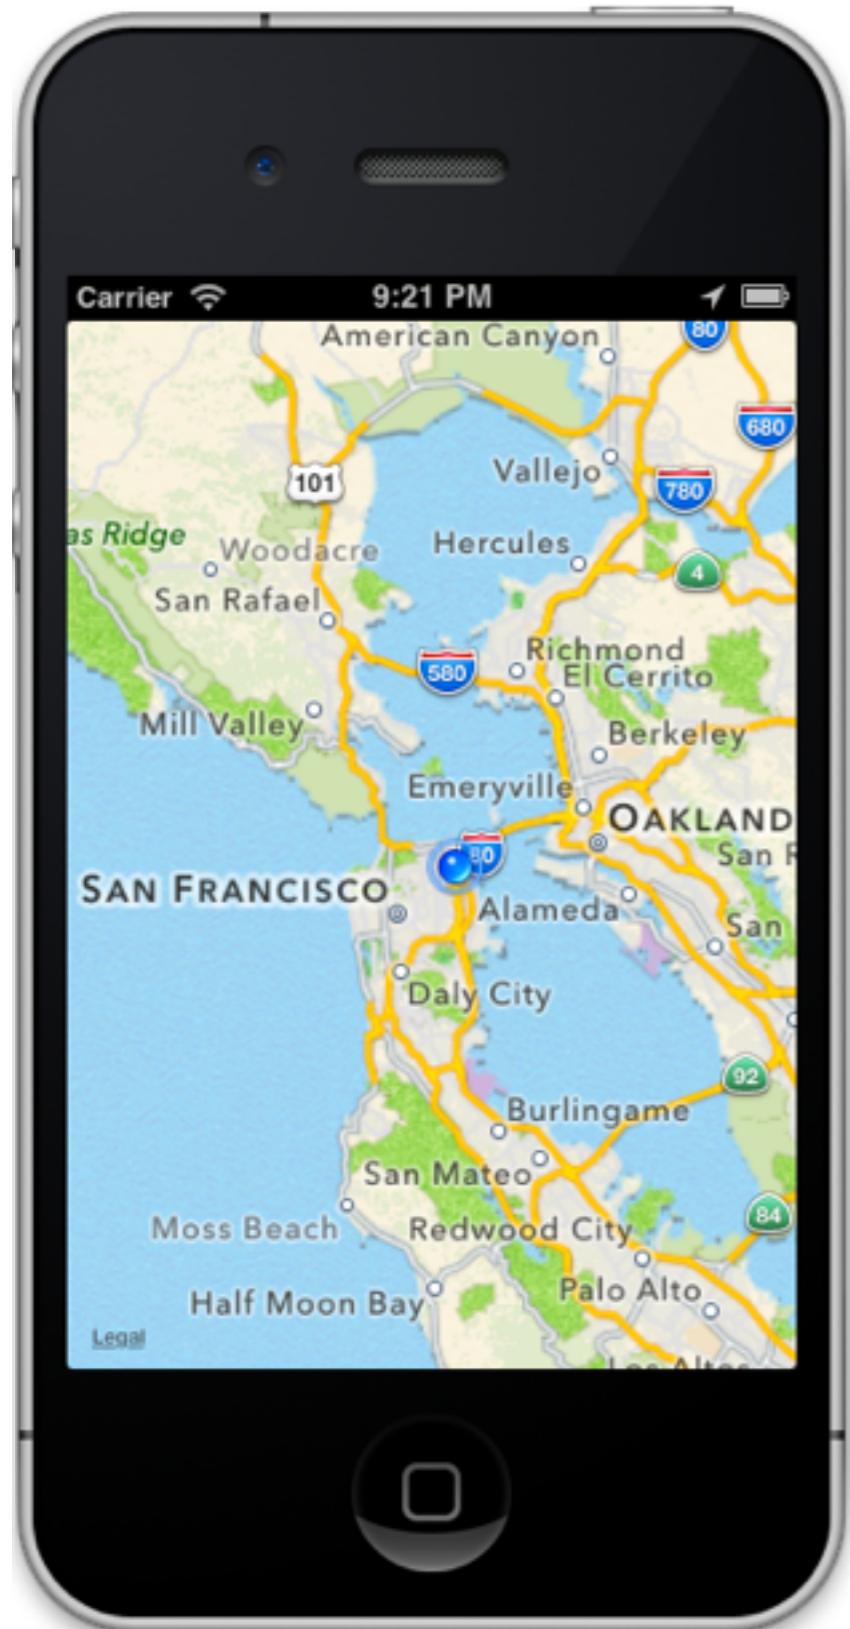

Standard

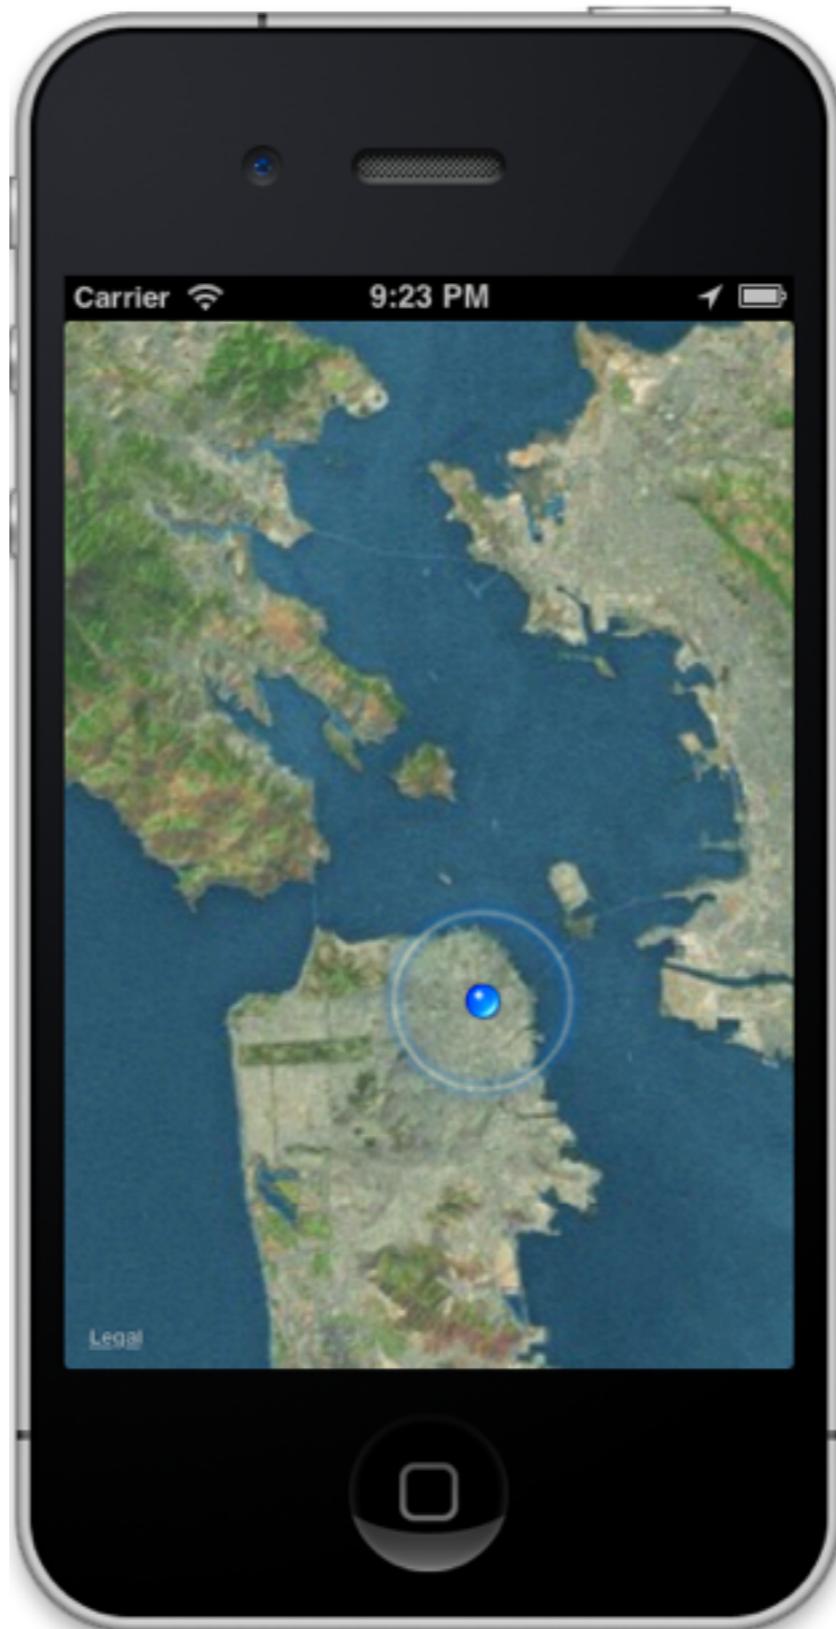


Satellite

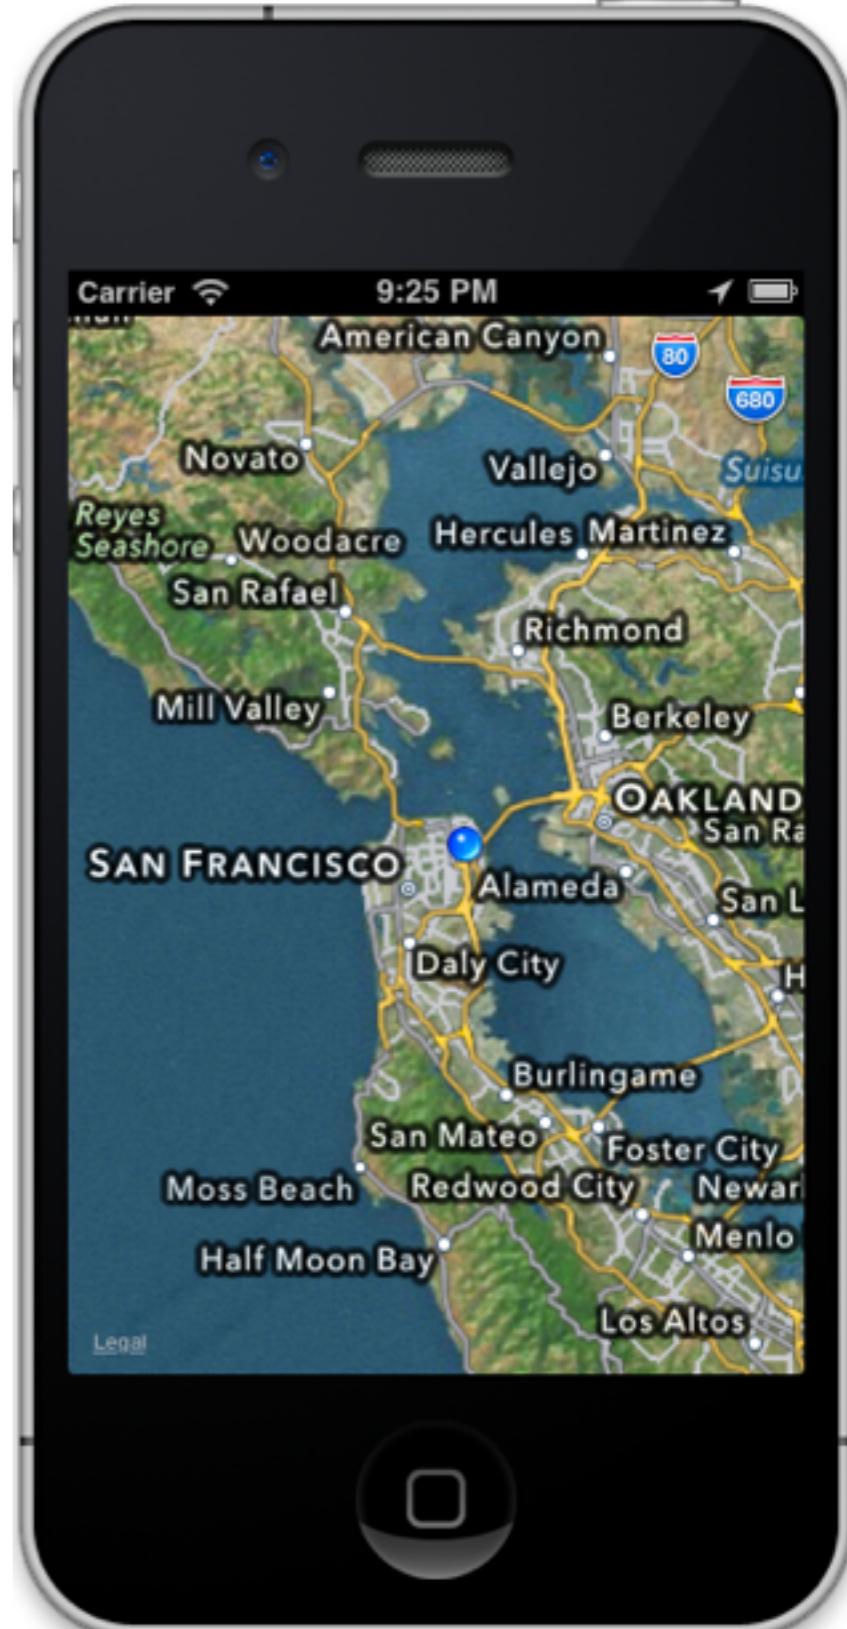


Hybrid

Annotations

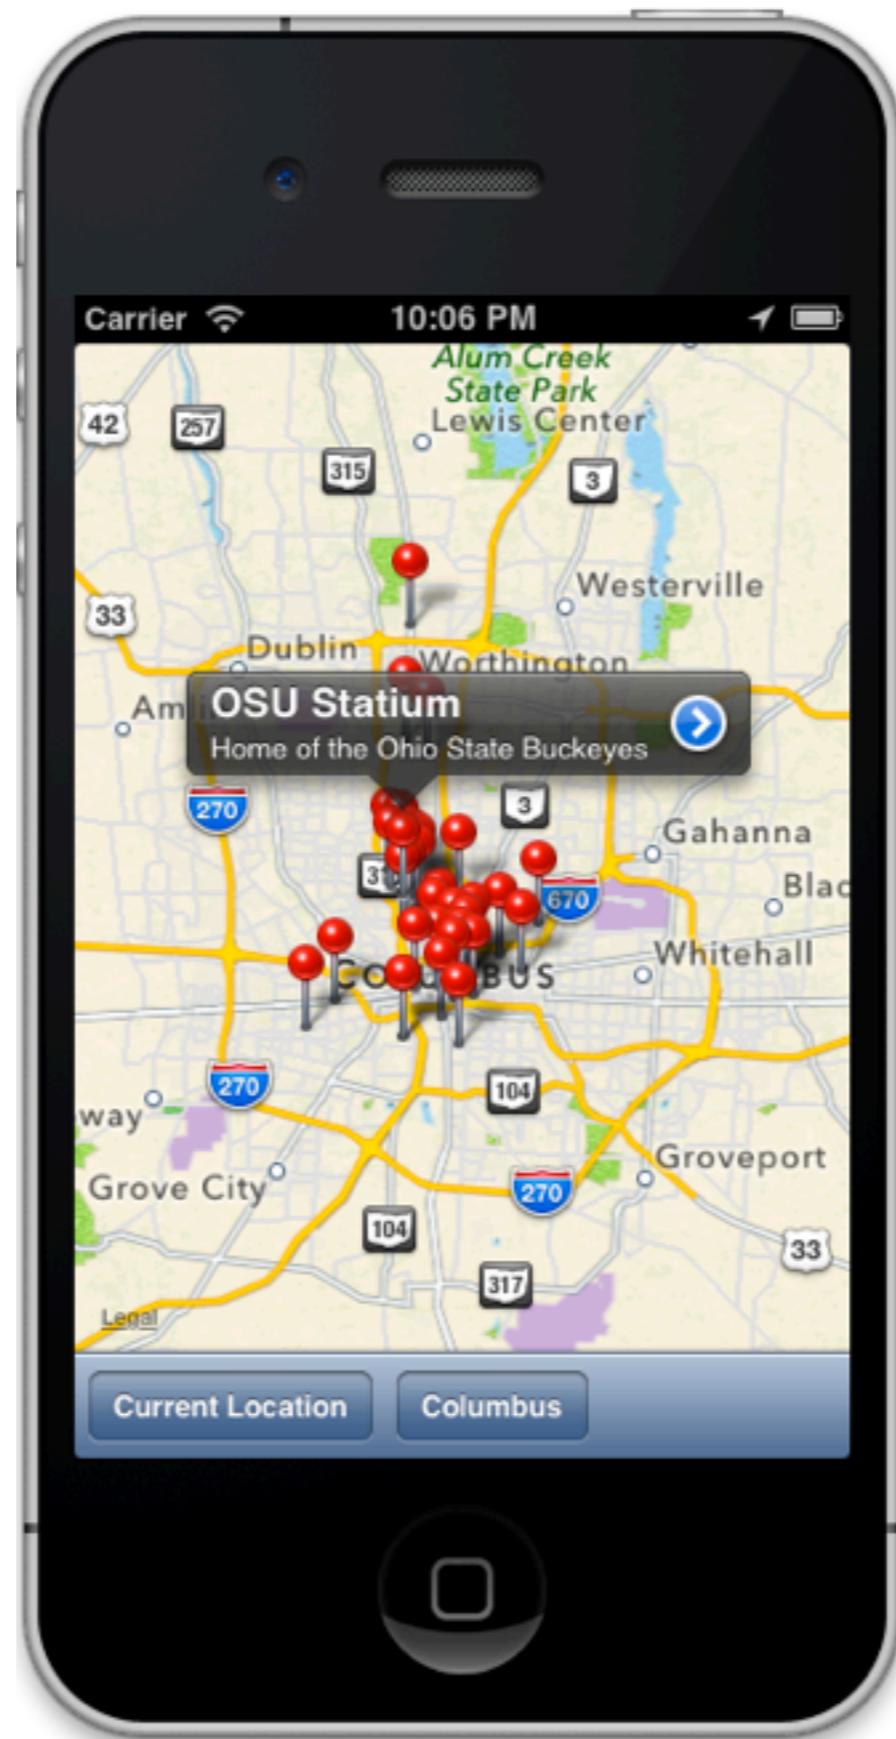

Classes and Protocols

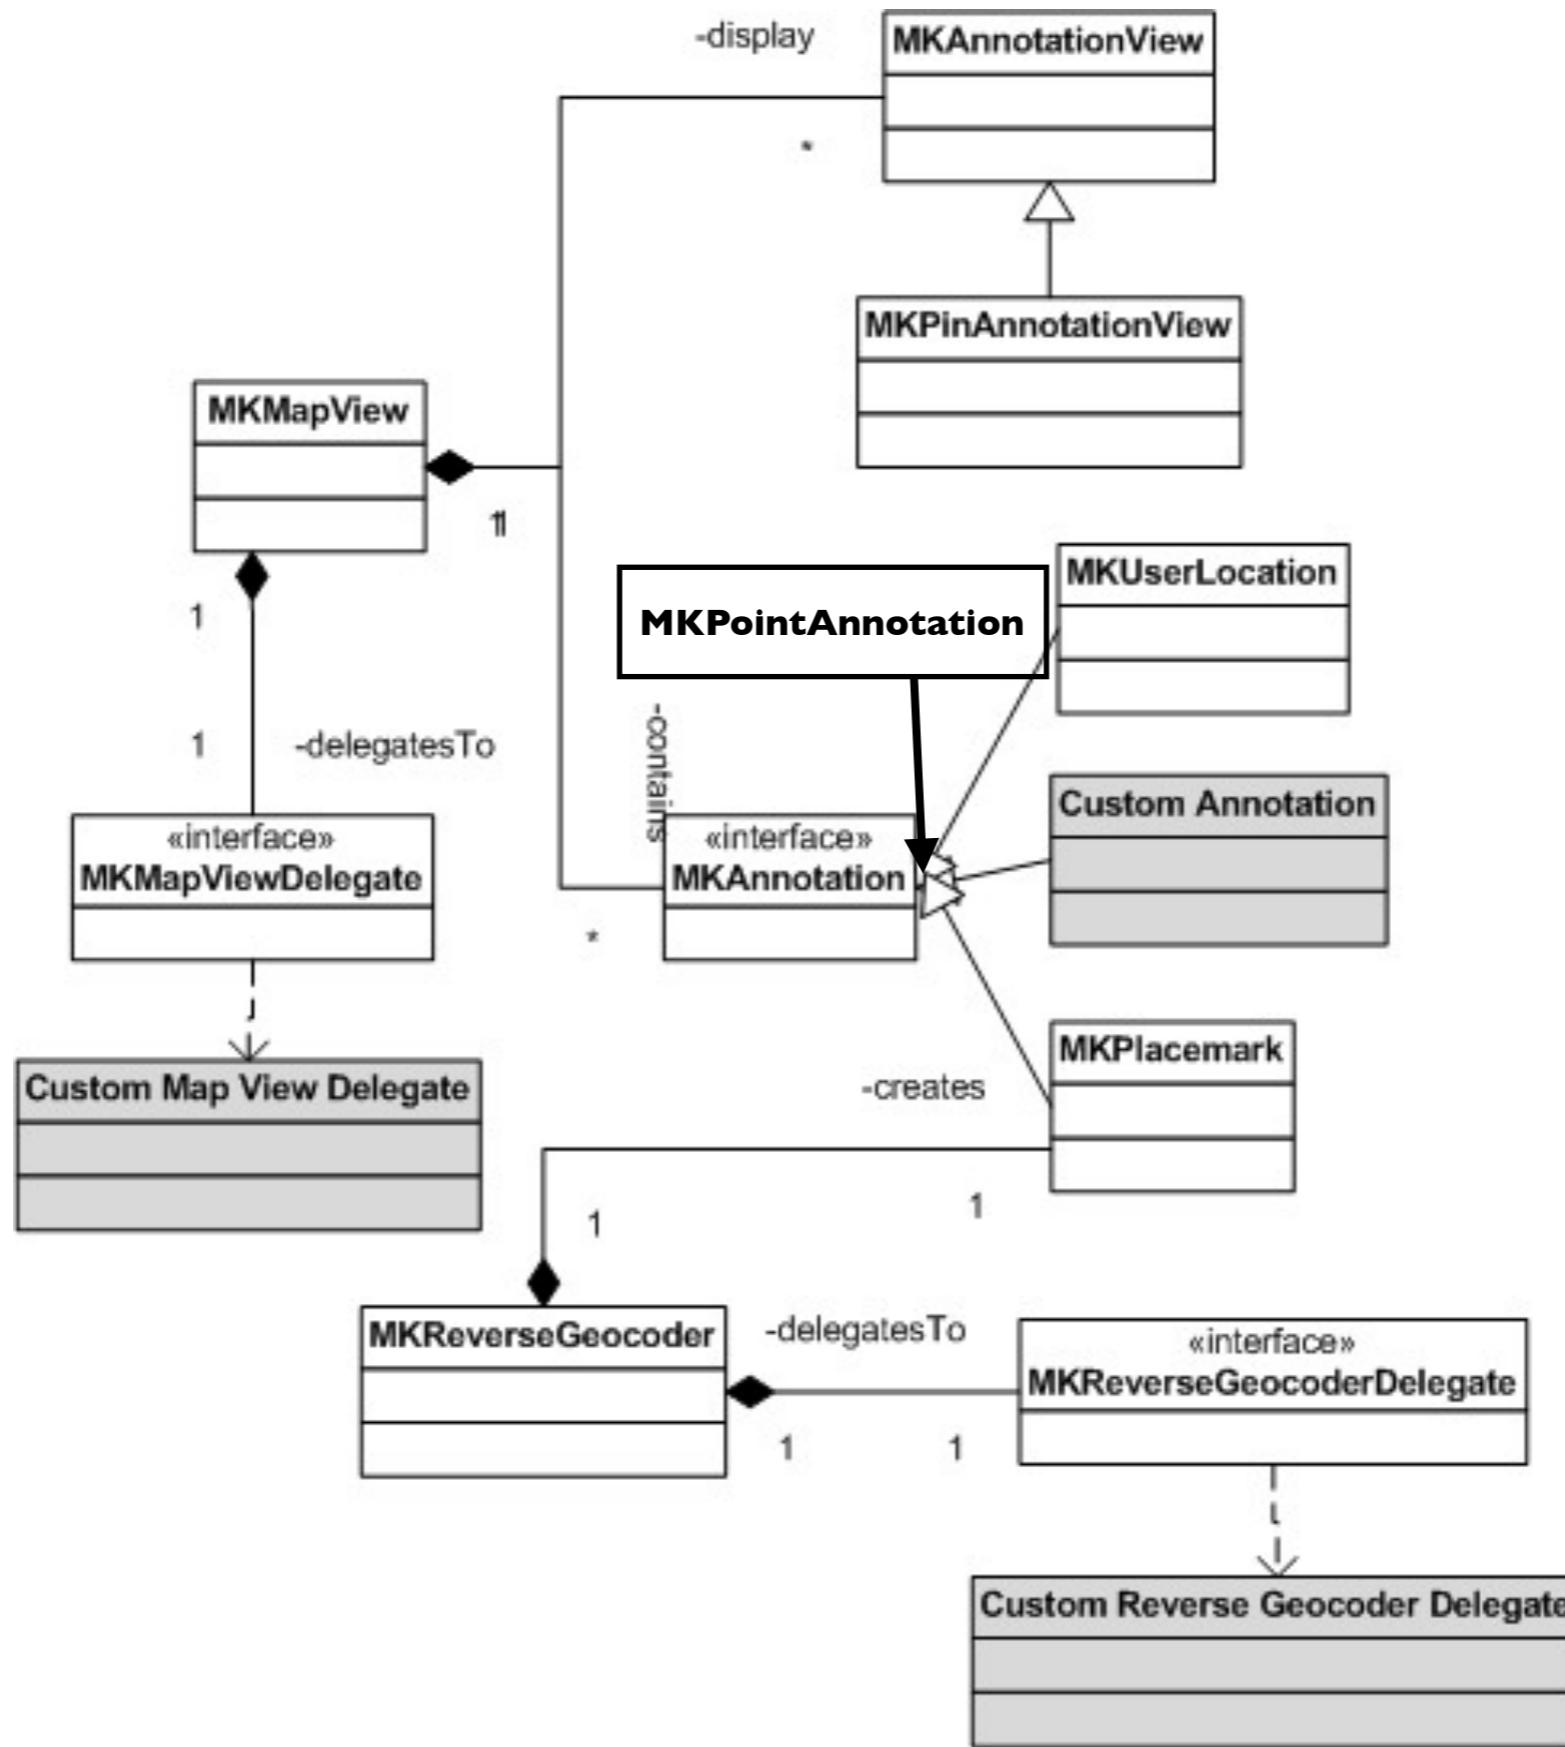



Adding Maps

Adding Maps Steps

1. Add MapView component to view 
2. Add MapKit Framework 
3. Run Application 




Add Map View Component

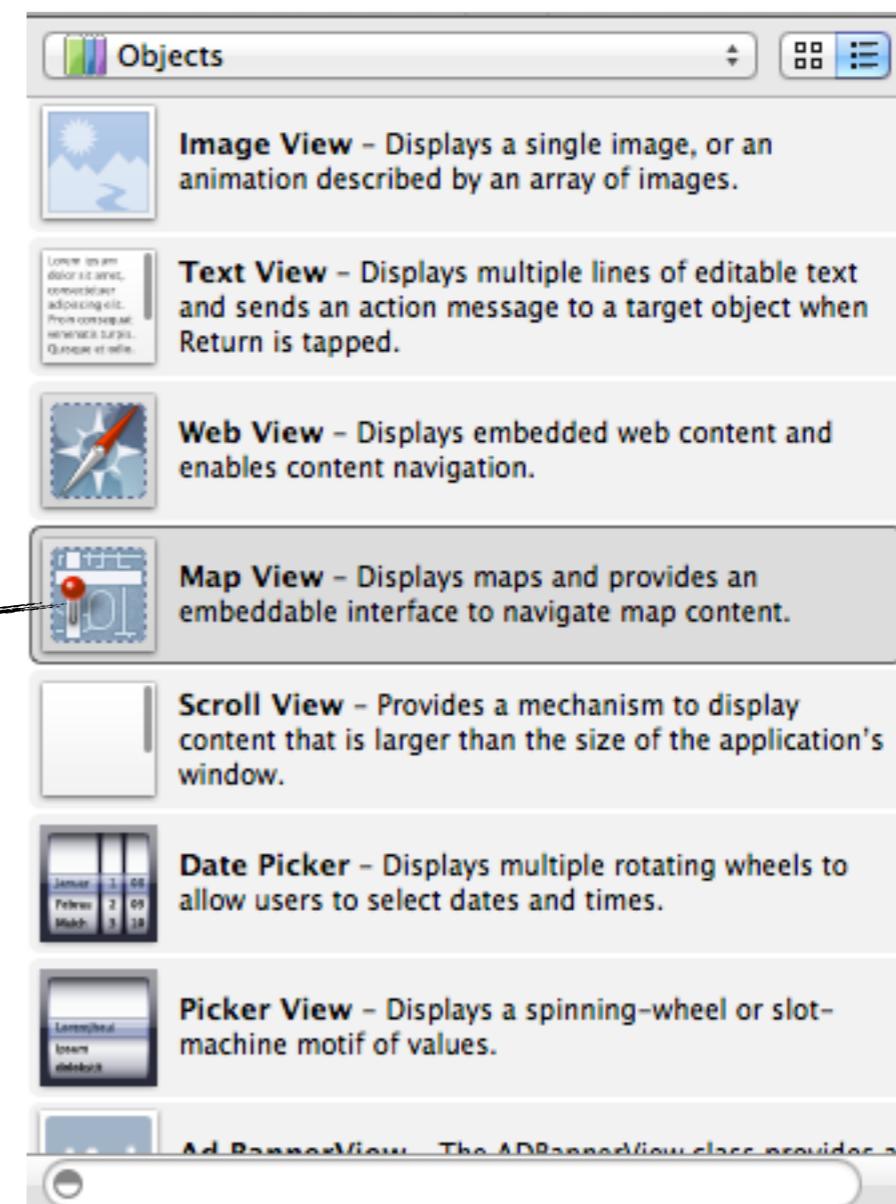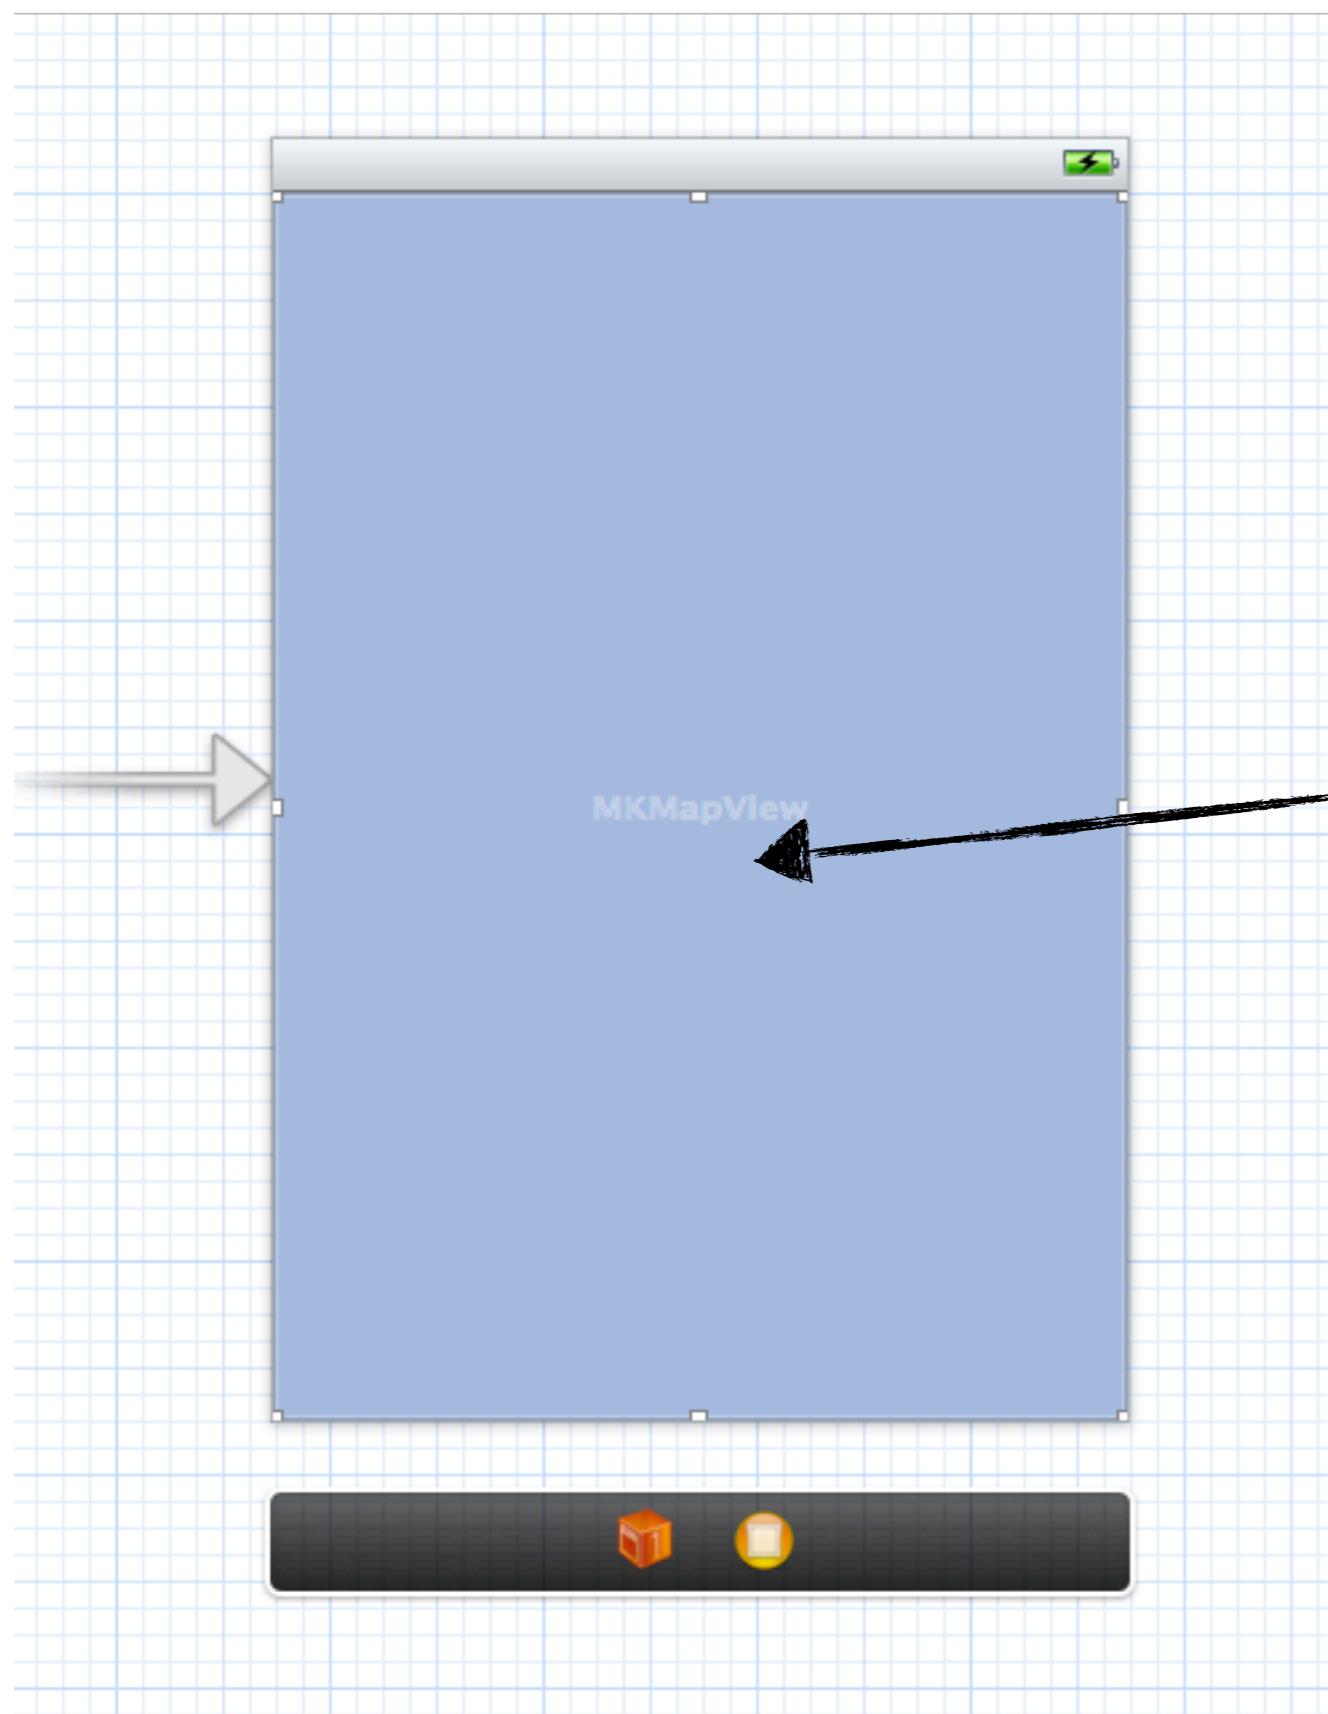

2012-06-29 06:10:37.505 ColumbusMaps[11781:f803] *** Terminating app due to uncaught exception 'NSInvalidUnarchiveOperationException', reason: 'Could not instantiate class named MKMapView'
*** First throw call stack:
(0x13c7022 0x1558cd6 0x136fa48 0x136f9b9 0x3324a3 0x33267b 0x332383
0x43002 0x332c6e 0x332383 0x232cad 0x332c6e 0x33267b 0x332383 0x232105
0xd81fc 0xd8779 0xd899b 0x37401 0x37670 0x37836 0xc881dd8 0x3e72a
0xf596 0x10274 0x1f183 0x1fc38 0x13634 0x12b1ef5 0x139b195 0x12ffff2
0x12fe8da 0x12fdd84 0x12fdc9b 0xfc65 0x11626 0x212d 0x2095 0x1)
terminate called throwing an exception




Add MapKit Framework

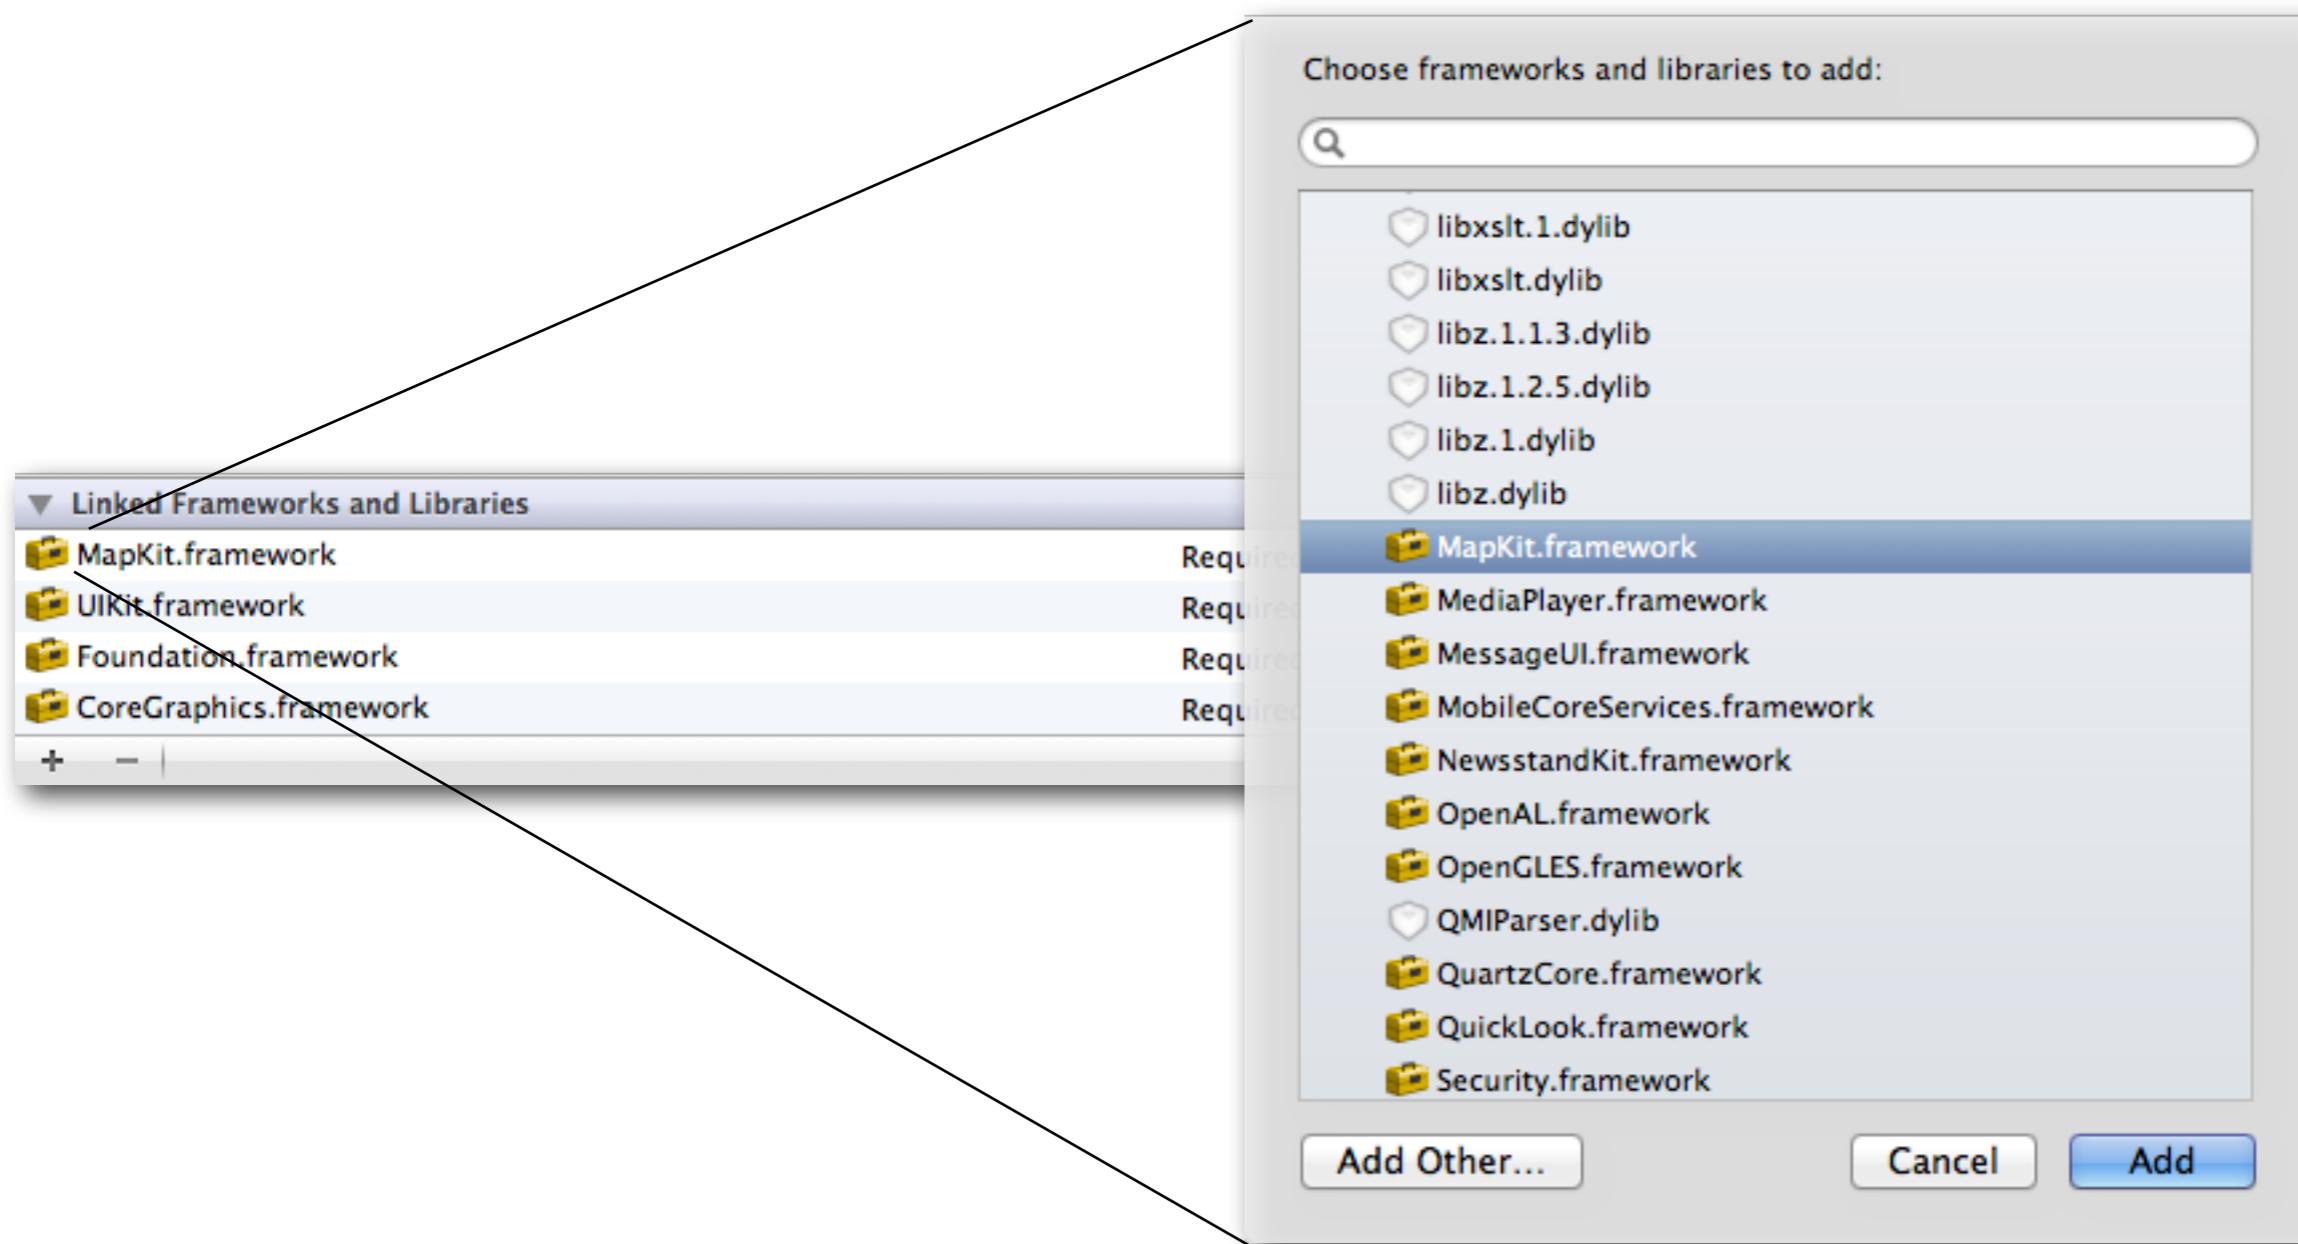





Run Application

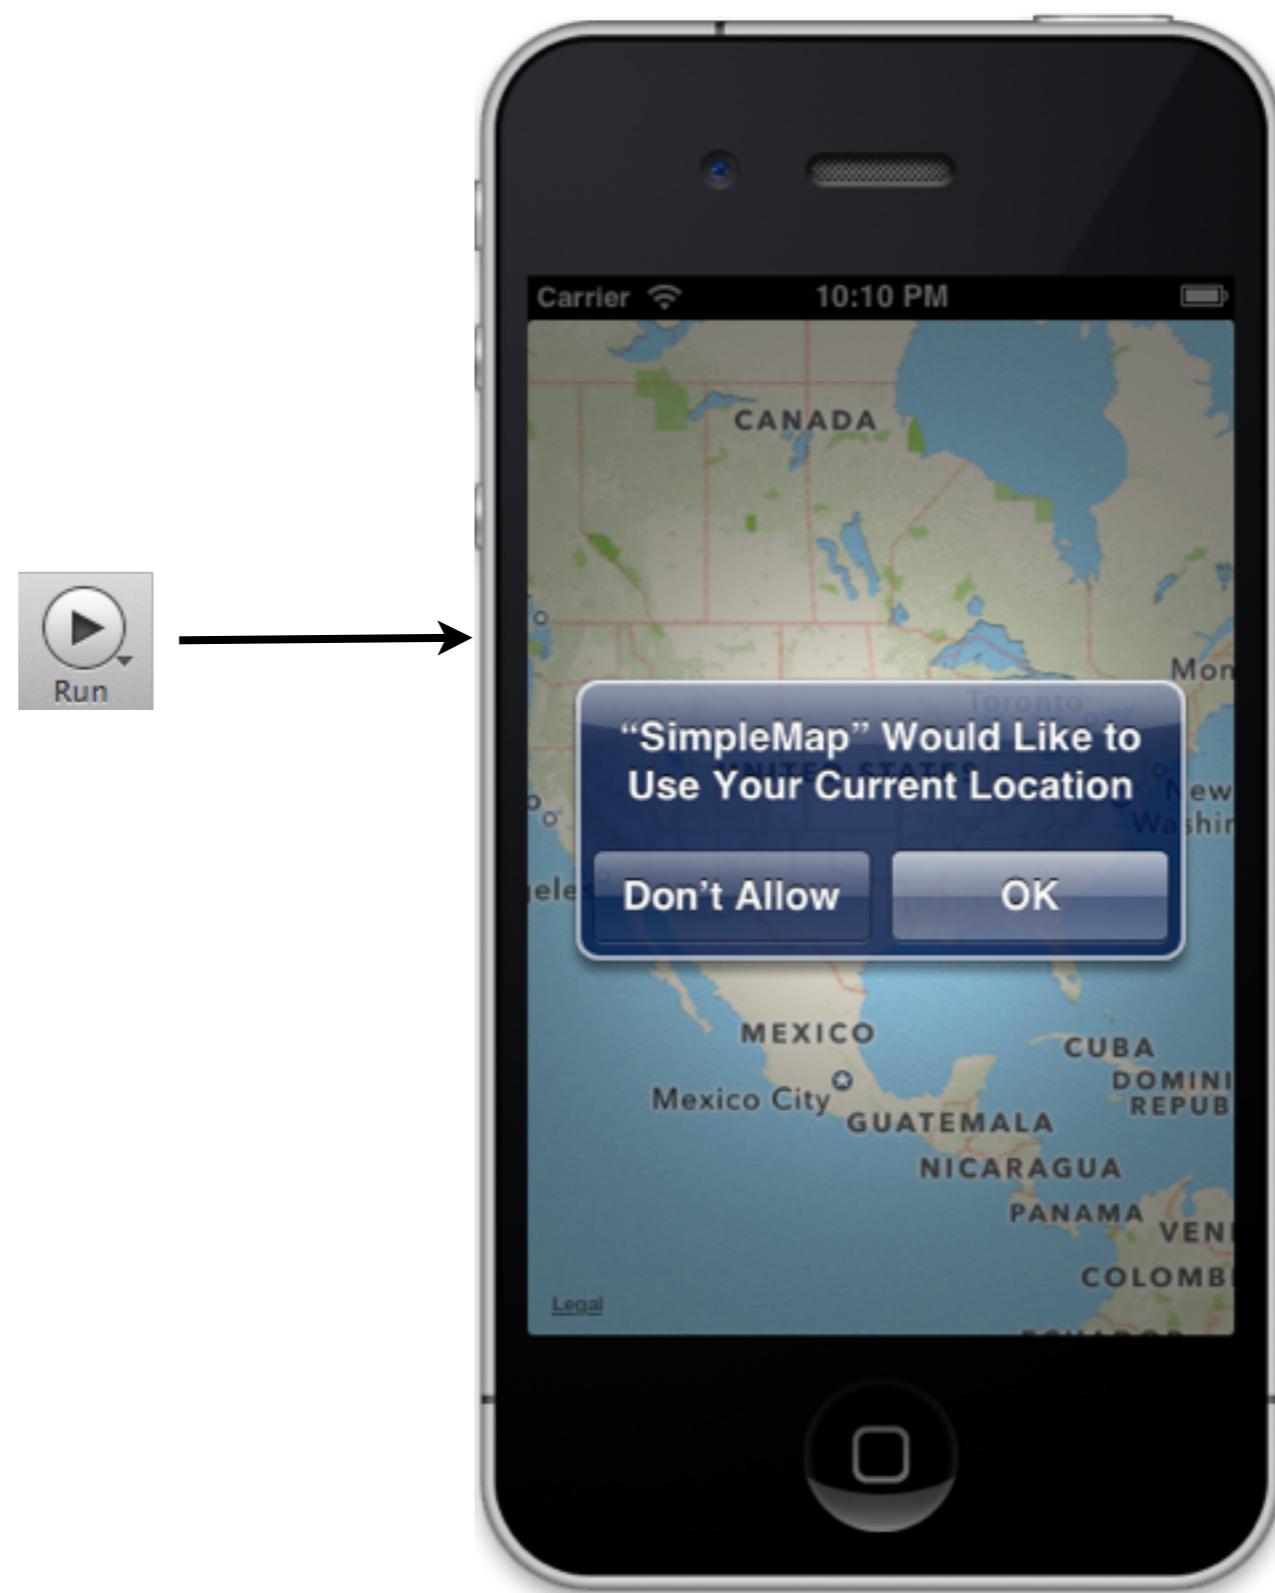

Display Current Location




Show User Location

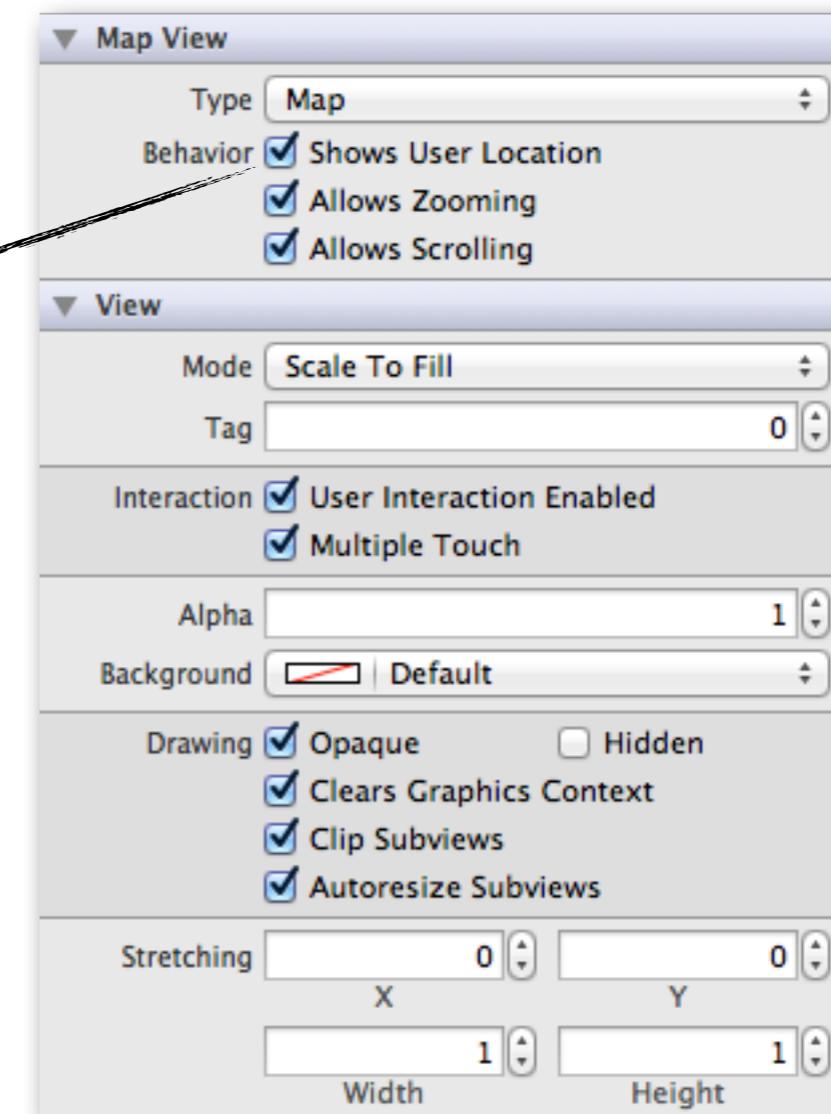
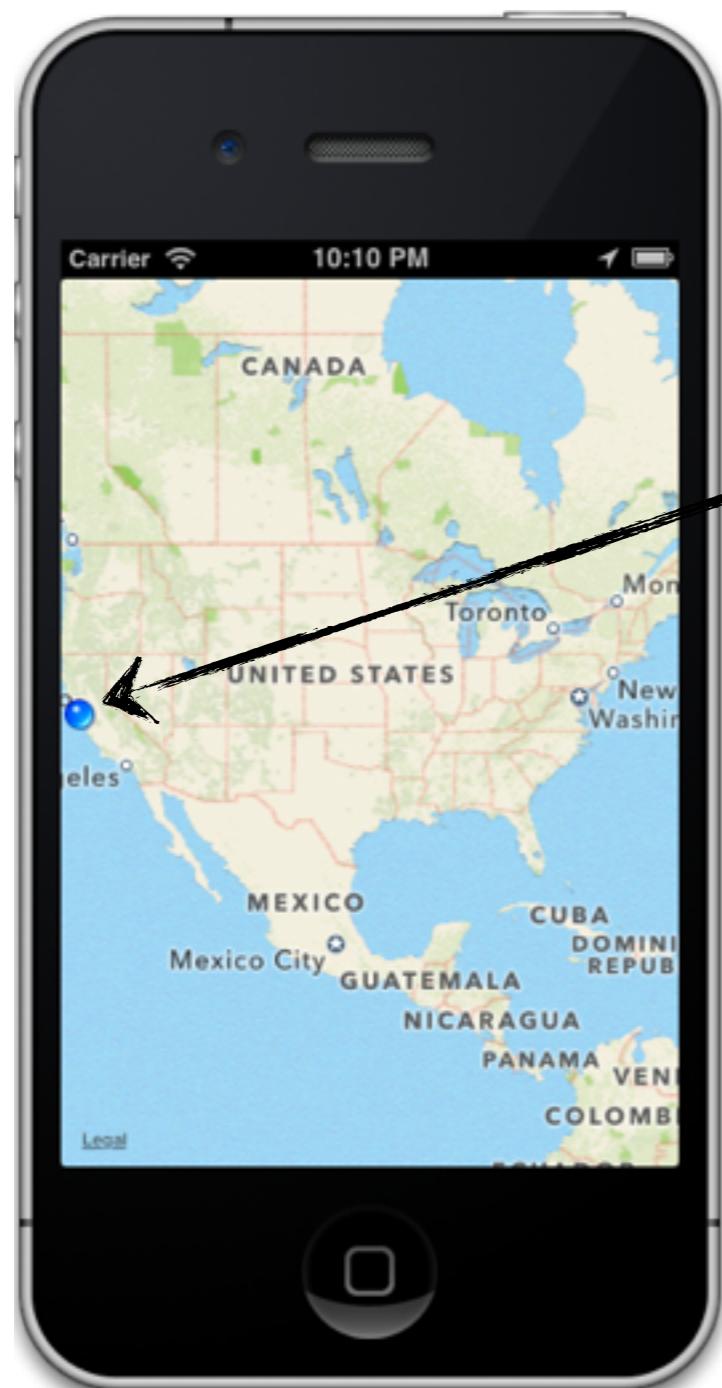





Default Simulator Location

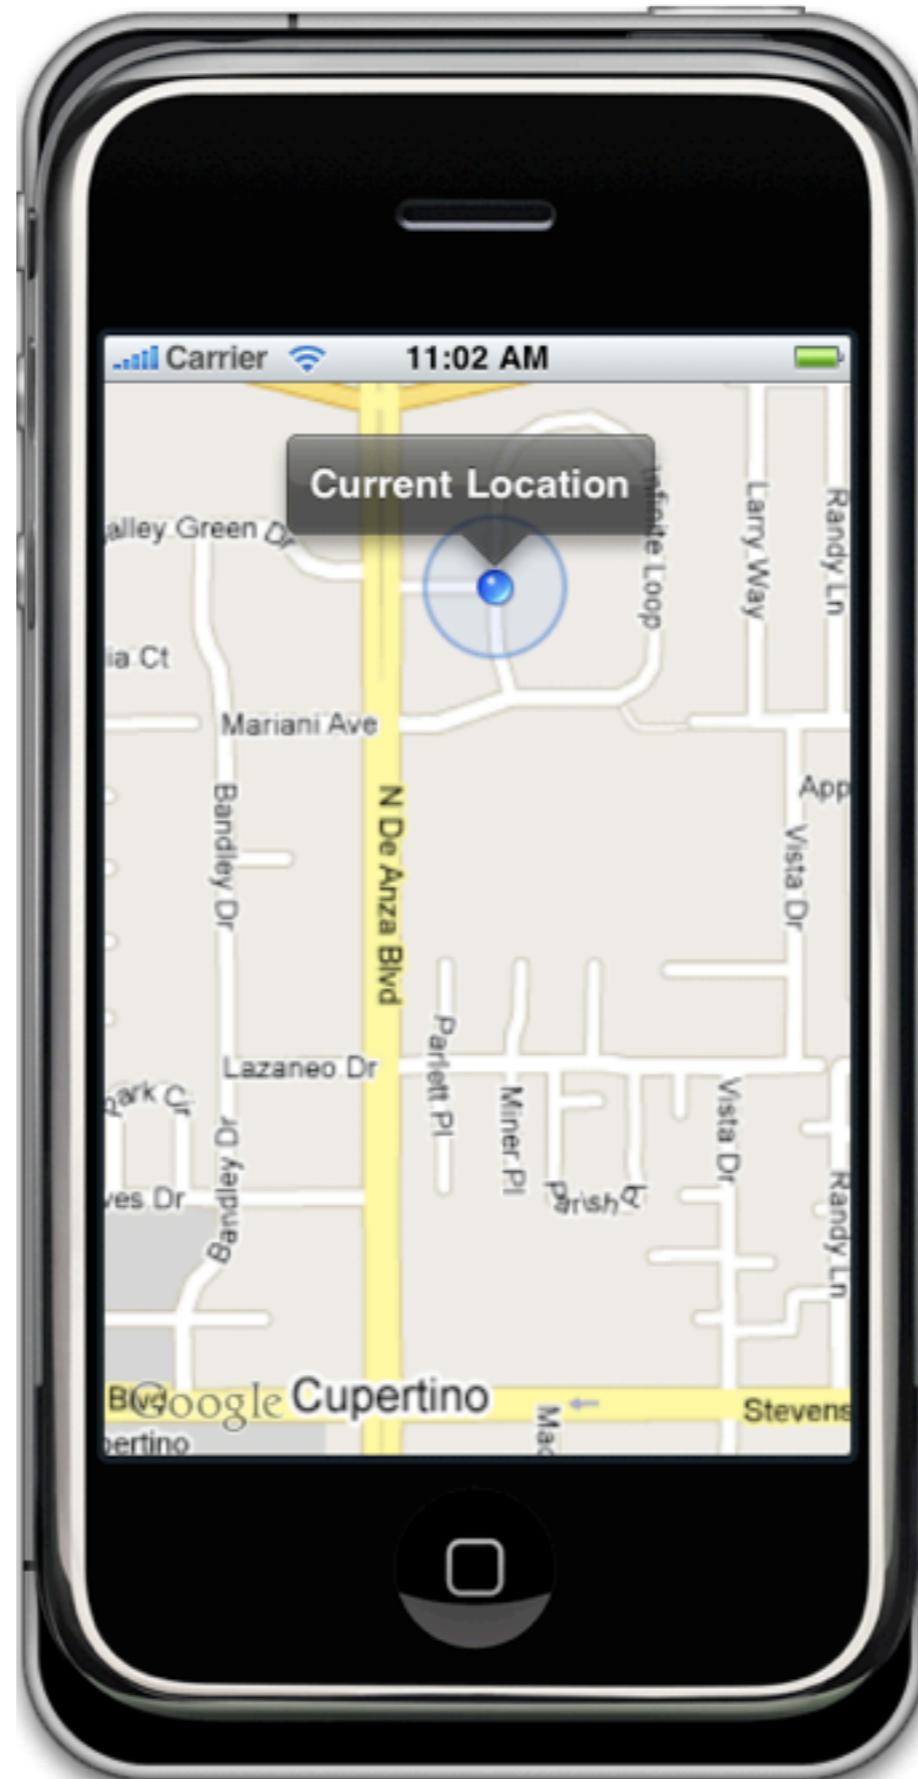

Simulate Location

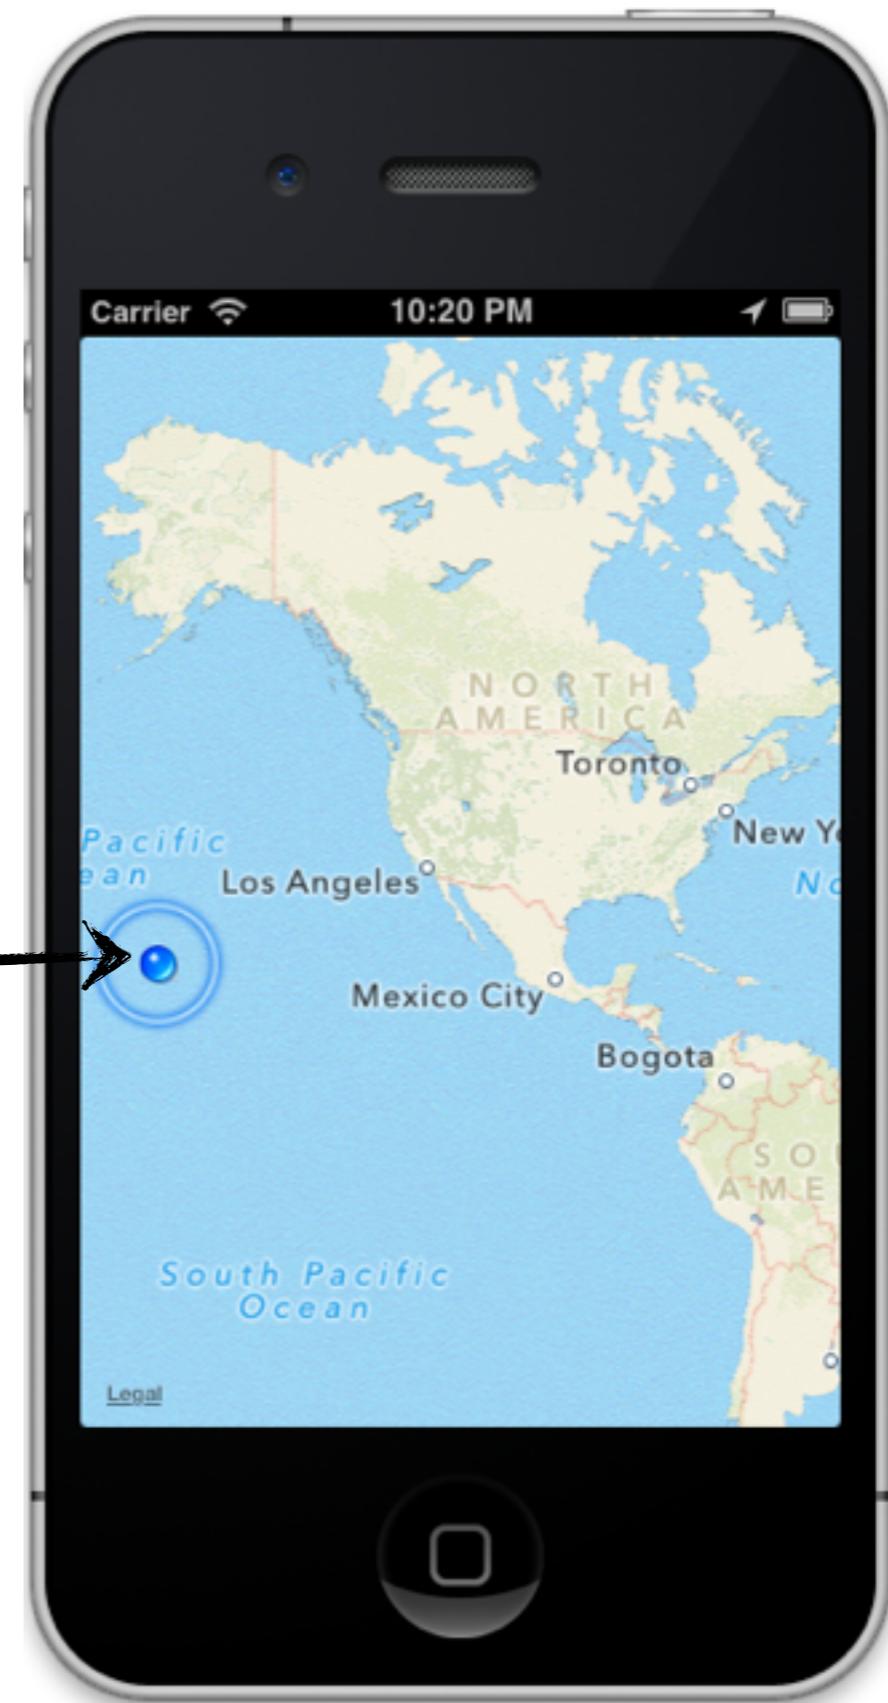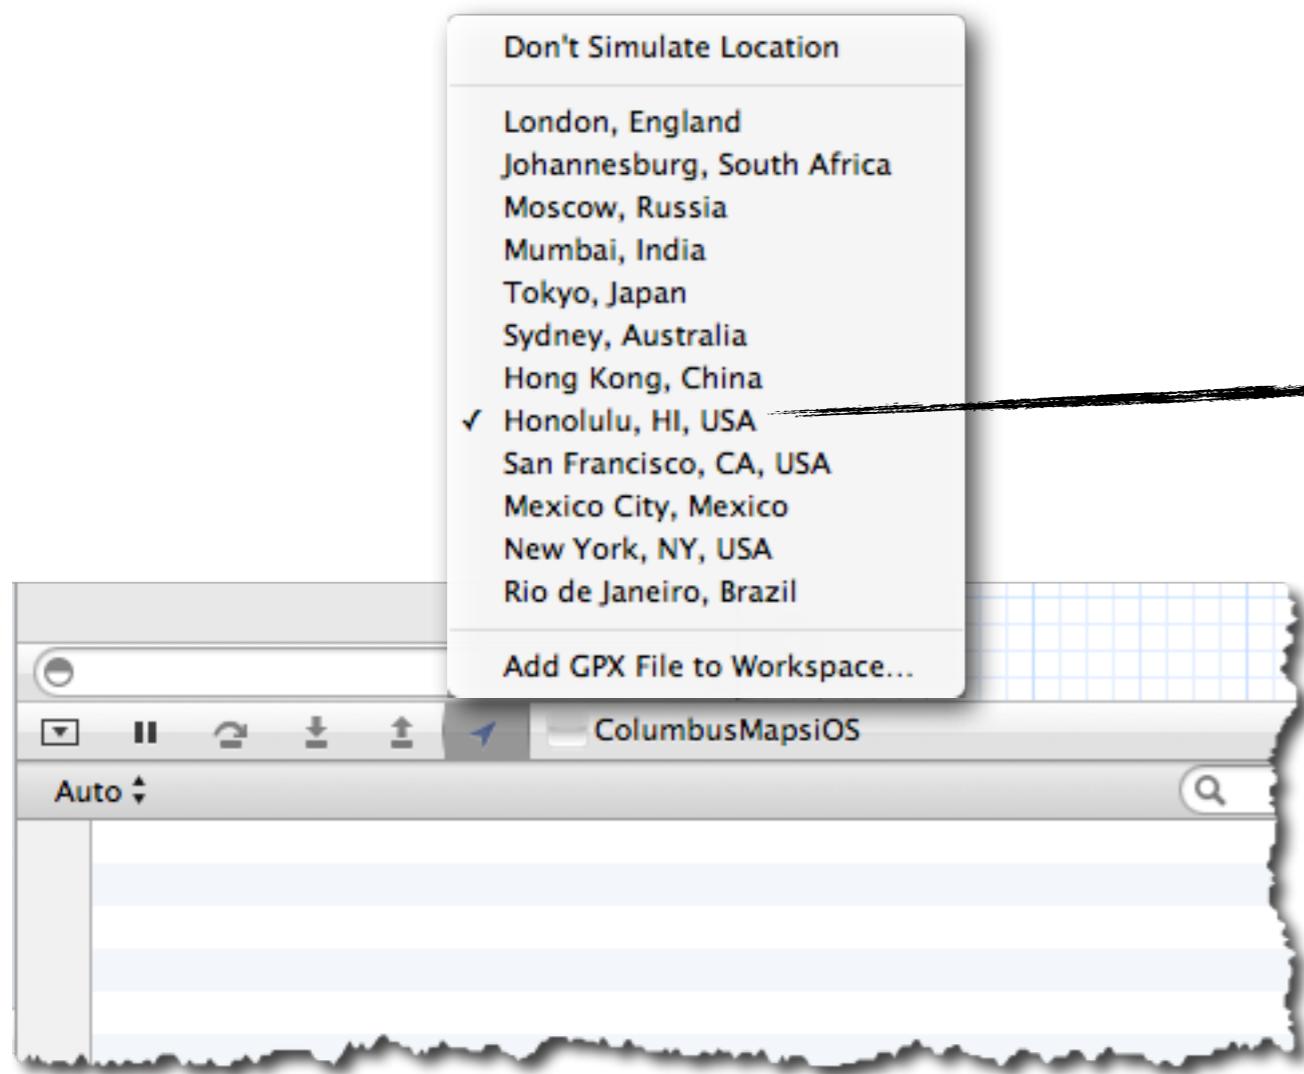

Choose a template for your new file:


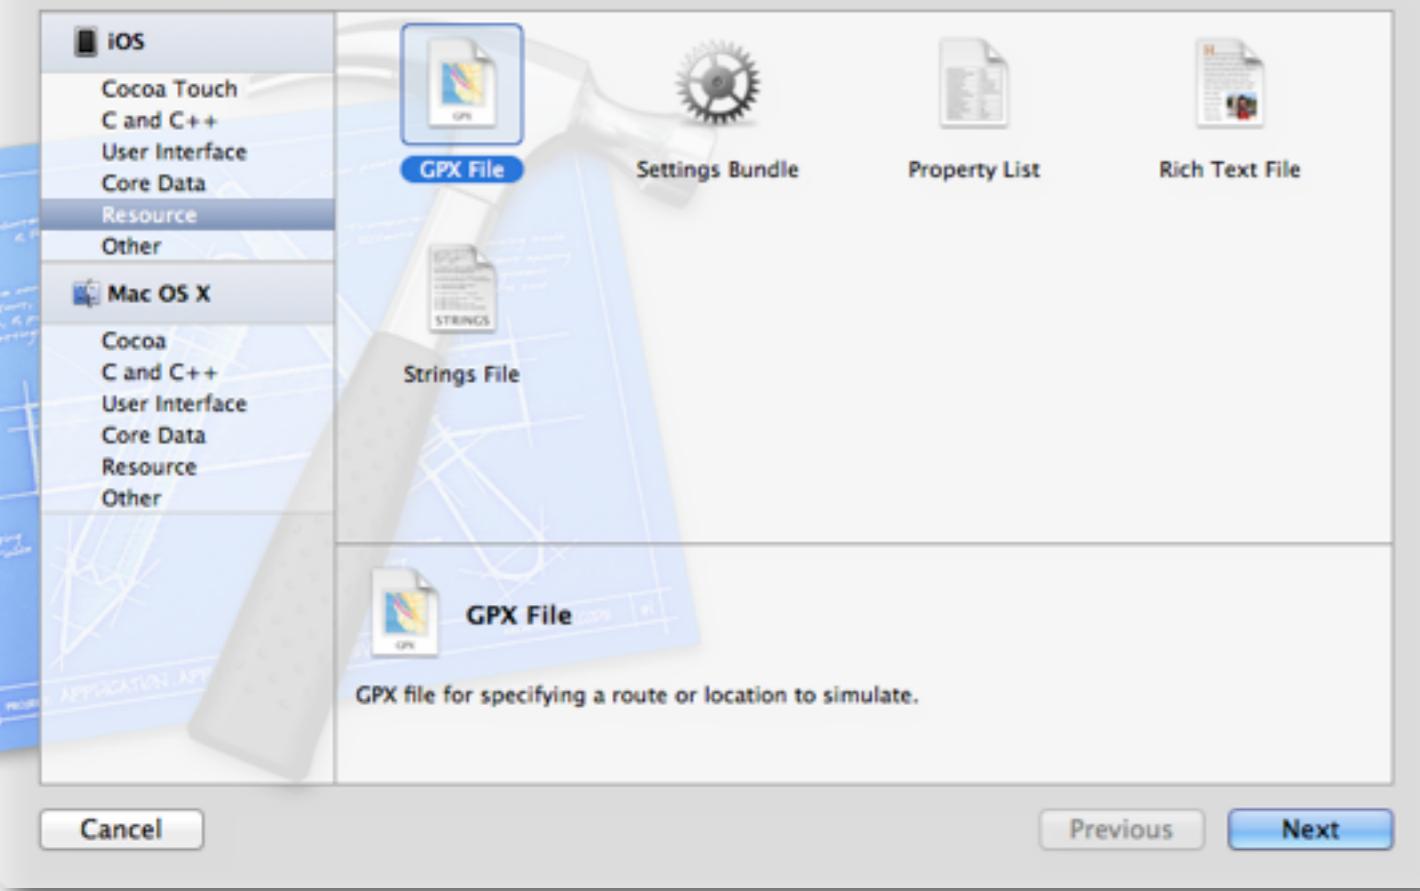


Location.gpx

```
<?xml version="1.0"?>
<gpx version="1.1" creator="Xcode">

    <wpt lat="37.331705" lon="-122.030237">
        <name>Cupertino</name>
    </wpt>

</gpx>
```

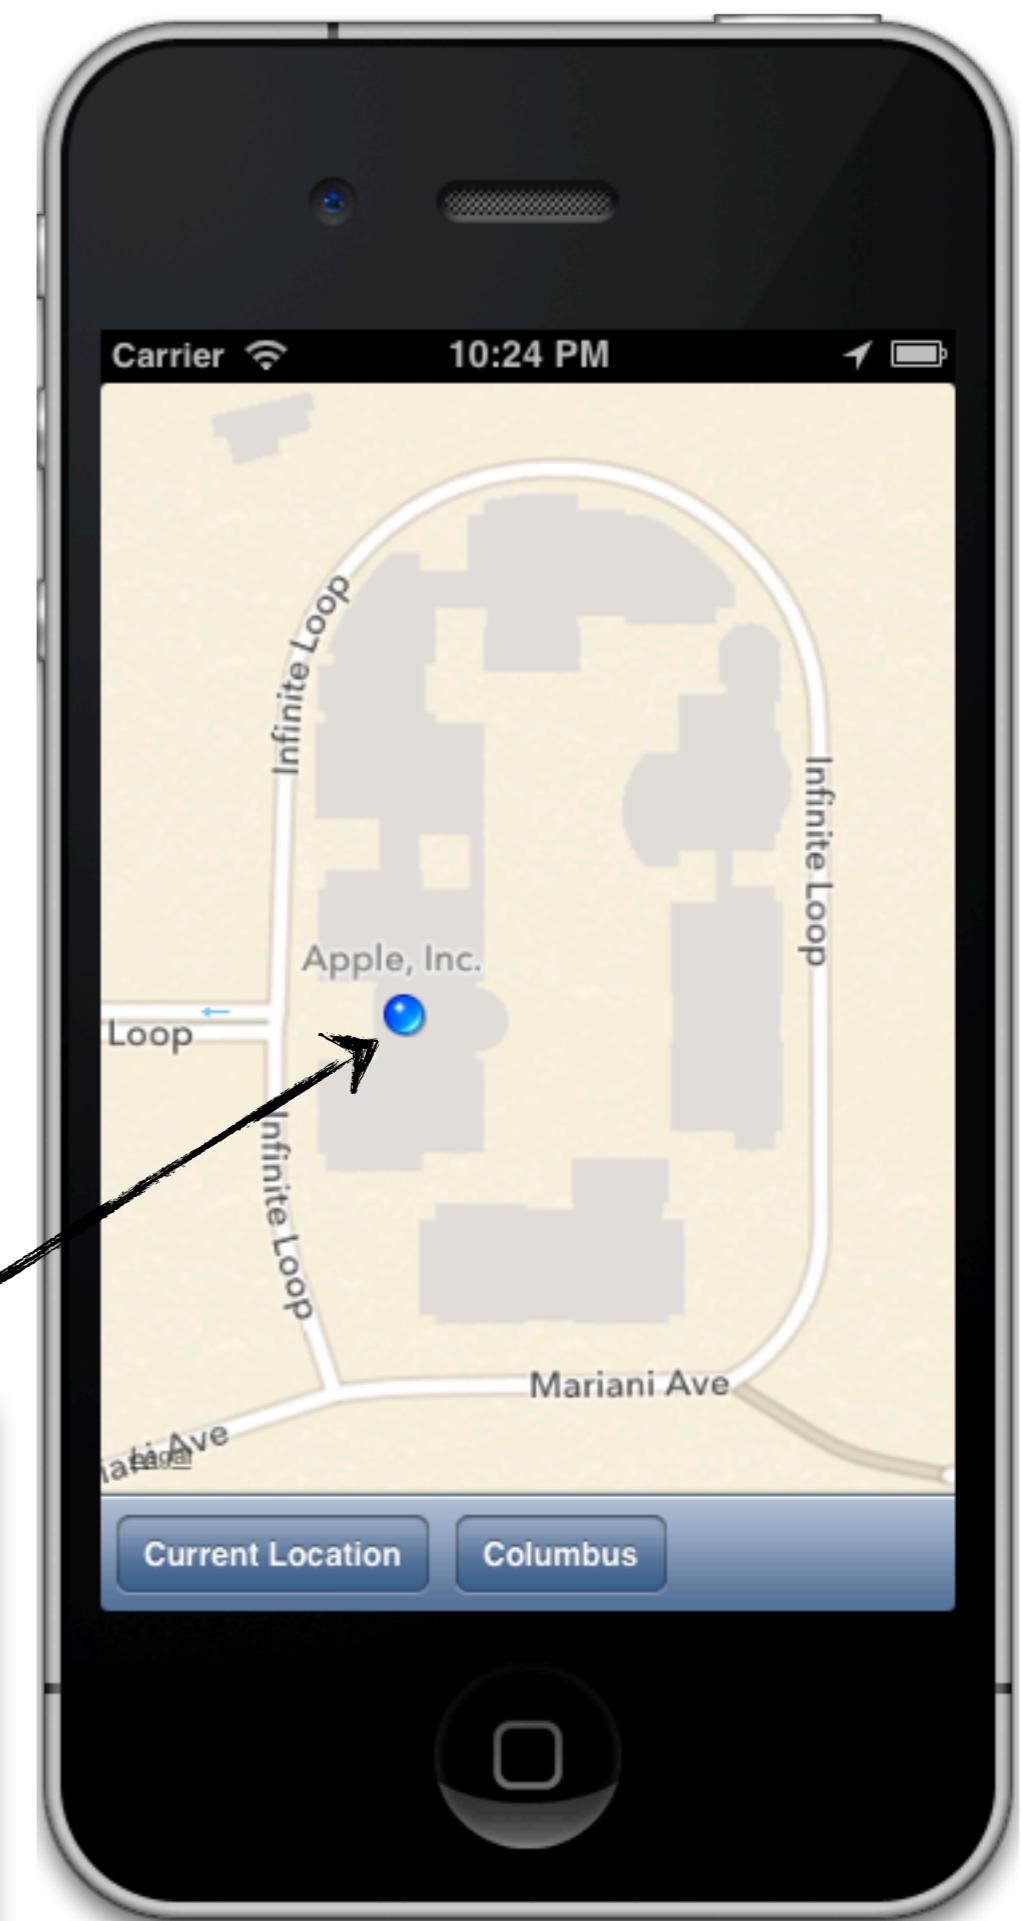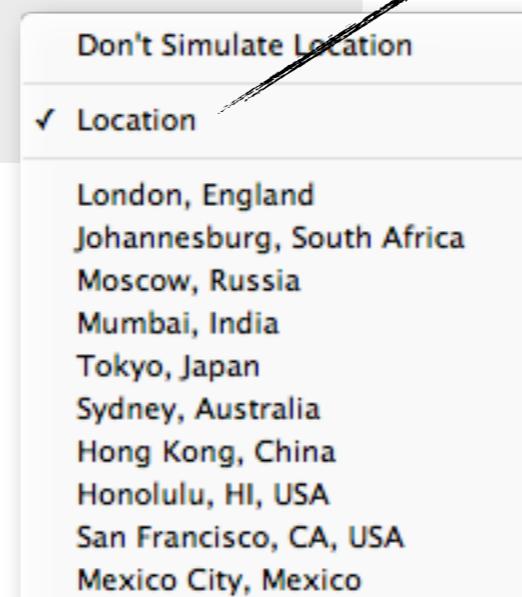



GPX: the GPS Exchange Format

WHAT IS GPX?

GPX (the GPS Exchange Format) is a light-weight XML data format for the interchange of GPS data (waypoints, routes, and tracks) between applications and Web services on the Internet.

CURRENT STATUS

The GPX 1.1 schema was released on August 9, 2004. GPX has been the de-facto XML standard for lightweight interchange of GPS data since the initial GPX 1.0 release in 2002. GPX is being used by **dozens of software programs and Web services for GPS data exchange, mapping, and geocaching.**

GPX FOR DEVELOPERS

If you're a developer, read how GPX can help your application or web service.

View the official GPX 1.1 Schema.

Read the GPX 1.1 Documentation.

Learn how to validate your GPX output.

View the official GPX 1.1 Schema.

GPX is an open development effort. To participate in the future development of GPX, join the **GPX Developers Forum**.



USER BENEFITS OF GPX

If you own a GPS, find out how GPX is helping to make all your favorite applications work together.

COMMENTS



To ask questions about the GPX format or propose changes, please join the **GPX Developers Forum**. If you have a customer support question regarding the GPX brand of CD players, alarm clocks, and other consumer electronics, visit www.gpx.com.

iSimulate

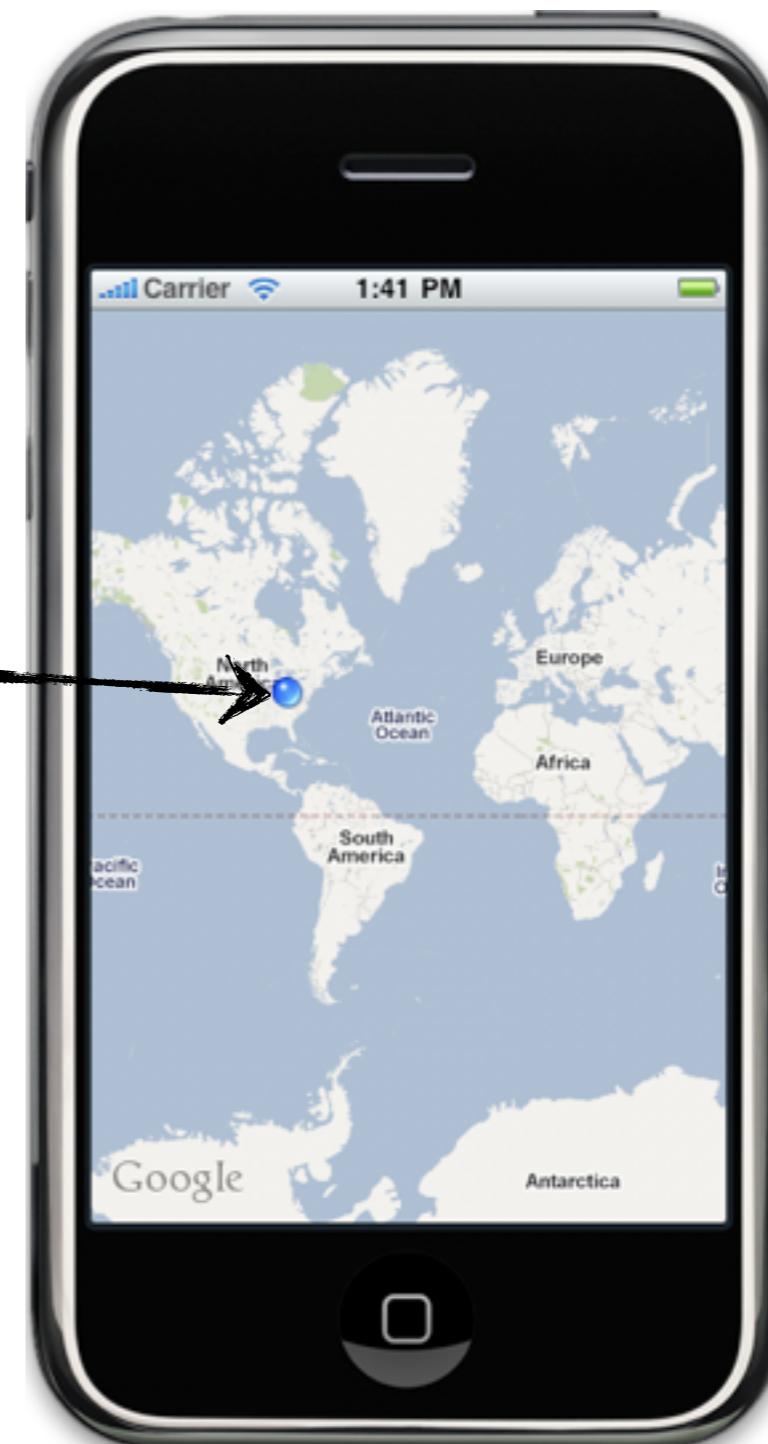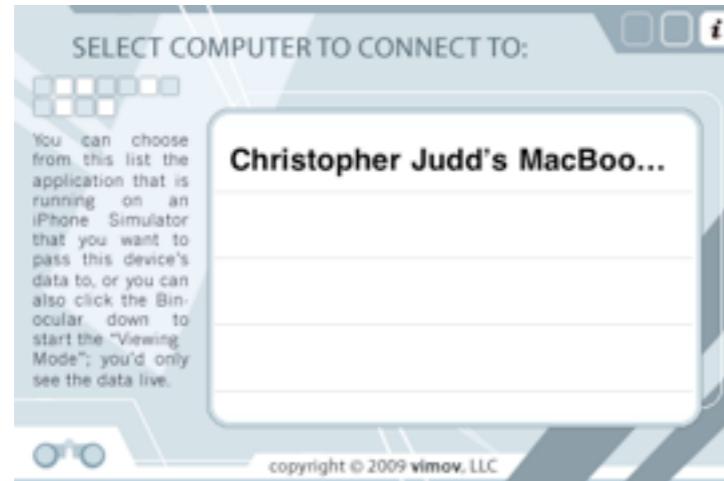


\$15.99 in App Store

Change Map Types

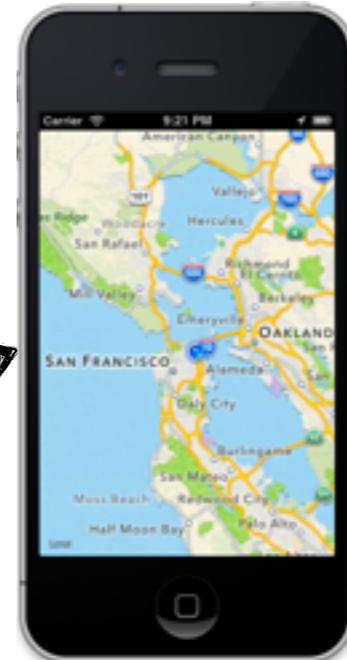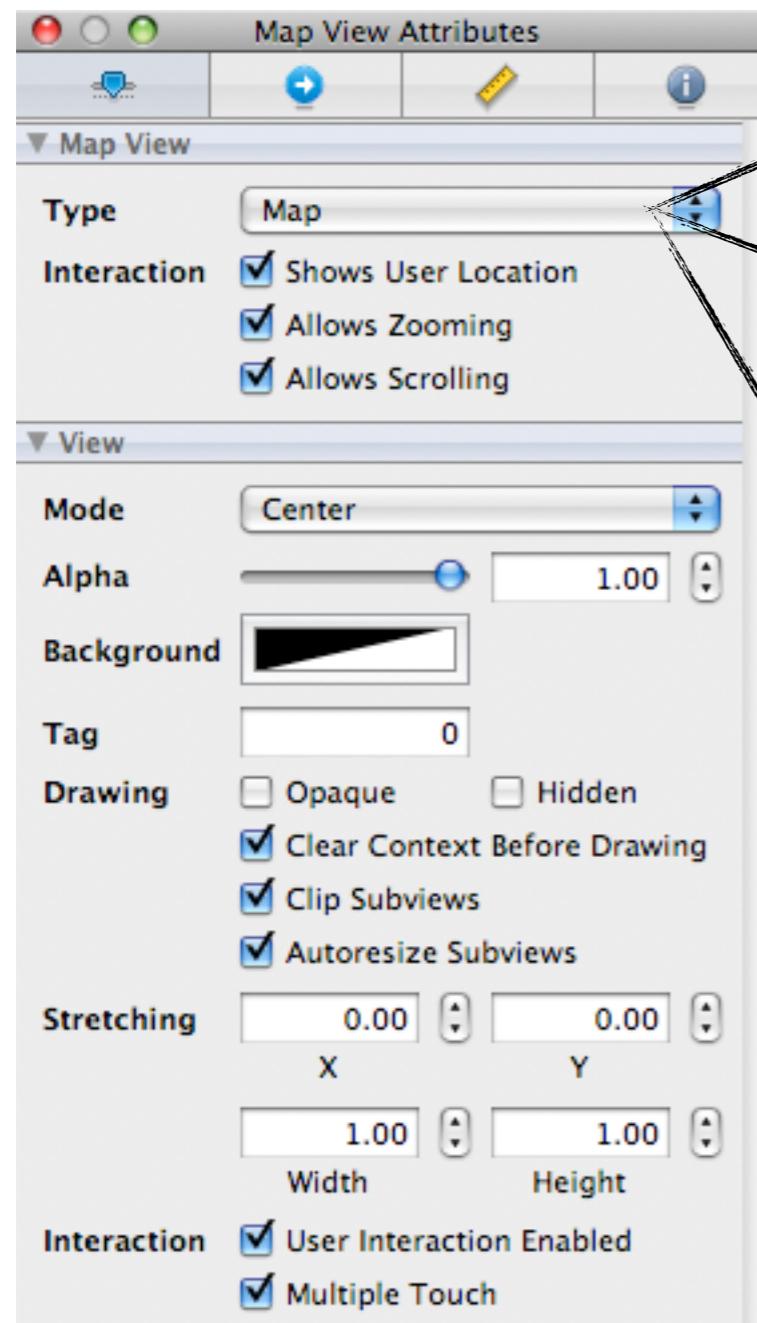

Map

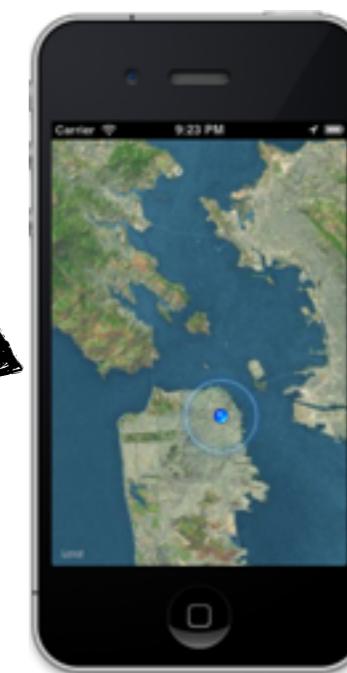


Satellite



Hybrid

```
switch (((UISegmentedControl *)sender).selectedSegmentIndex)
{
    case 0: {
        mapView.mapType = MKMapTypeStandard;
        break;
    }
    case 1: {
        mapView.mapType = MKMapTypeSatellite;
        break;
    }
    default: {
        mapView.mapType = MKMapTypeHybrid;
        break;
    }
}
```

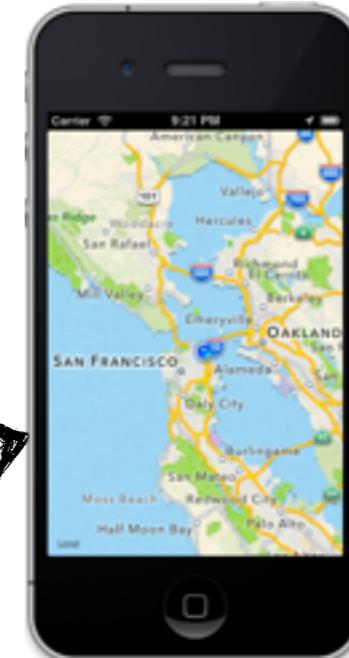

Map



Satellite




Hybrid

Adding Annotations


Add Annotation

```
CLLocationCoordinate2D coordinate = {40.001517, -83.019755};  
MKPointAnnotation* point = [MKPointAnnotation alloc];  
point.coordinate = coordinate;  
  
[mapView addAnnotation:point];
```

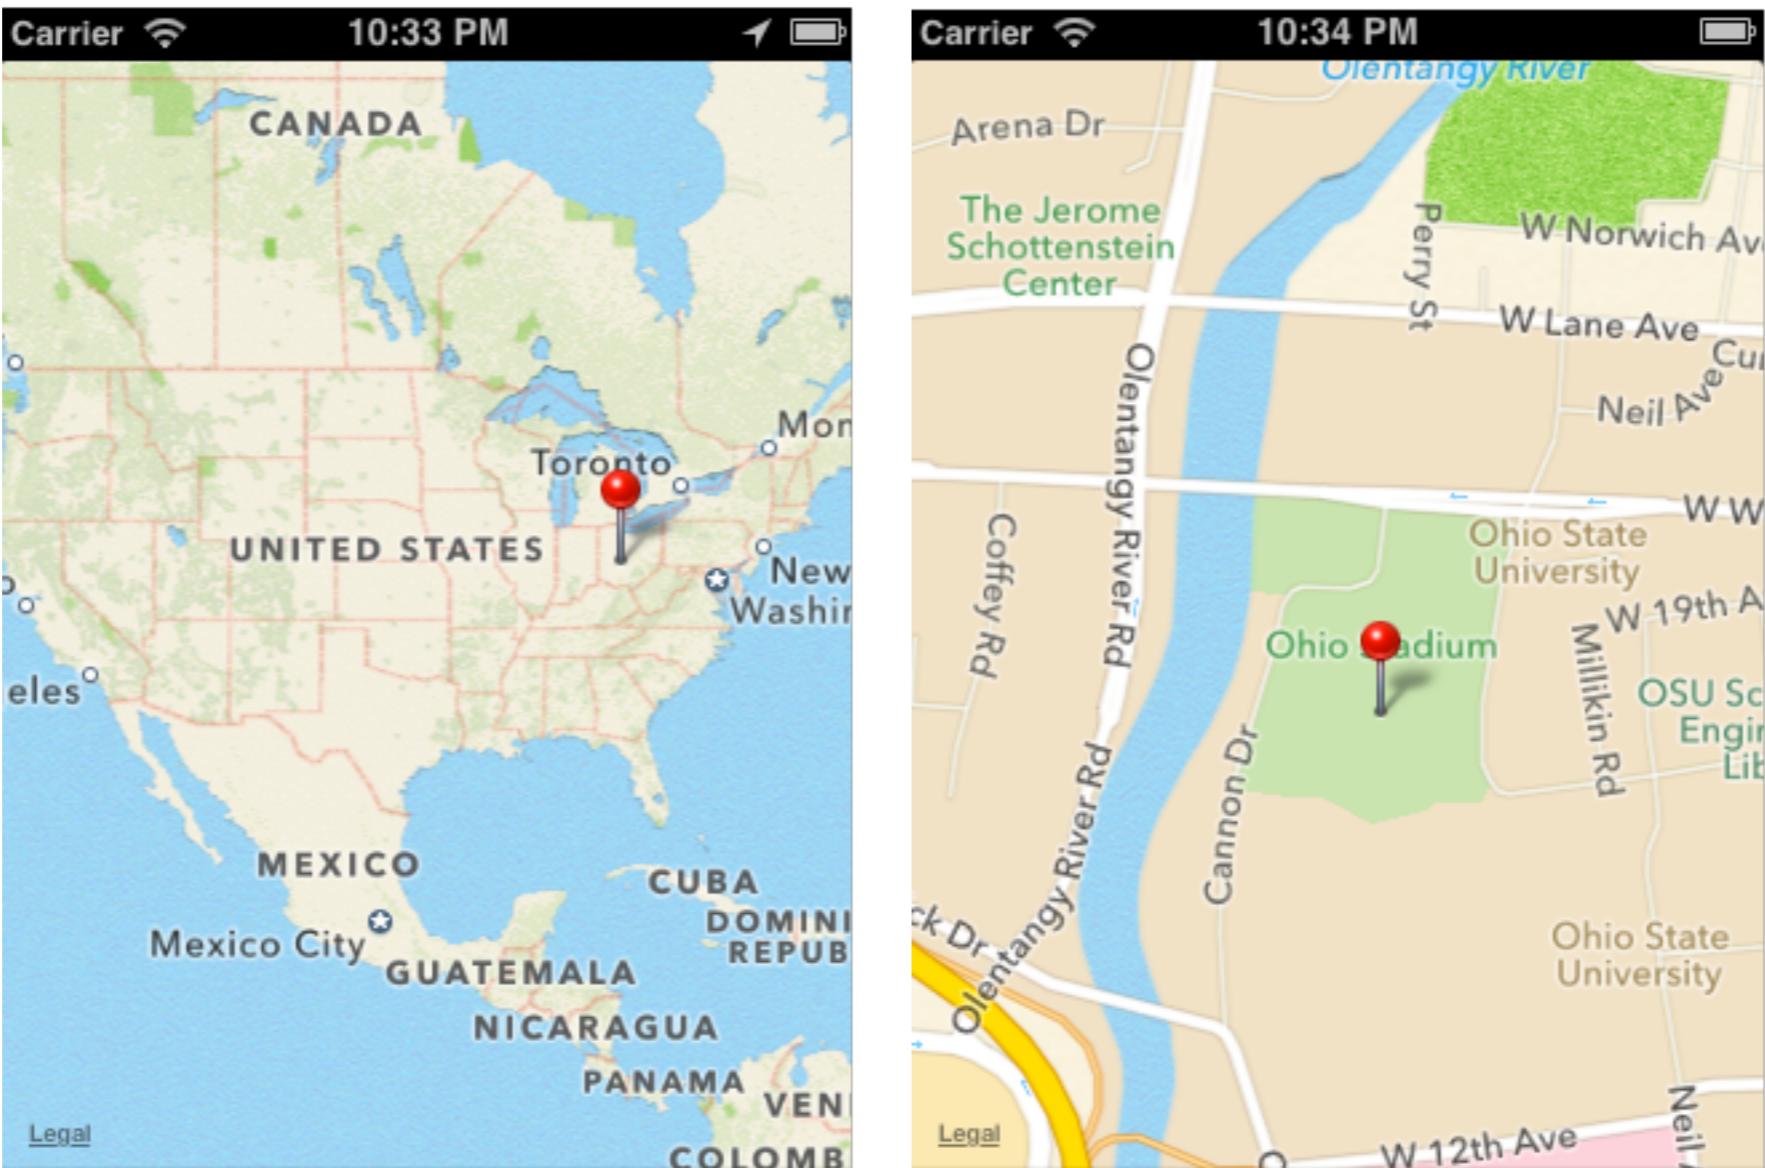


Add Annotation

```
CLLocationCoordinate2D coordinate = {40.001517, -83.019755};  
MKPointAnnotation* point = [MKPointAnnotation alloc];  
point.coordinate = coordinate;  
point.title = @"OSU Statium";  
  
[mapView addAnnotation:point];
```

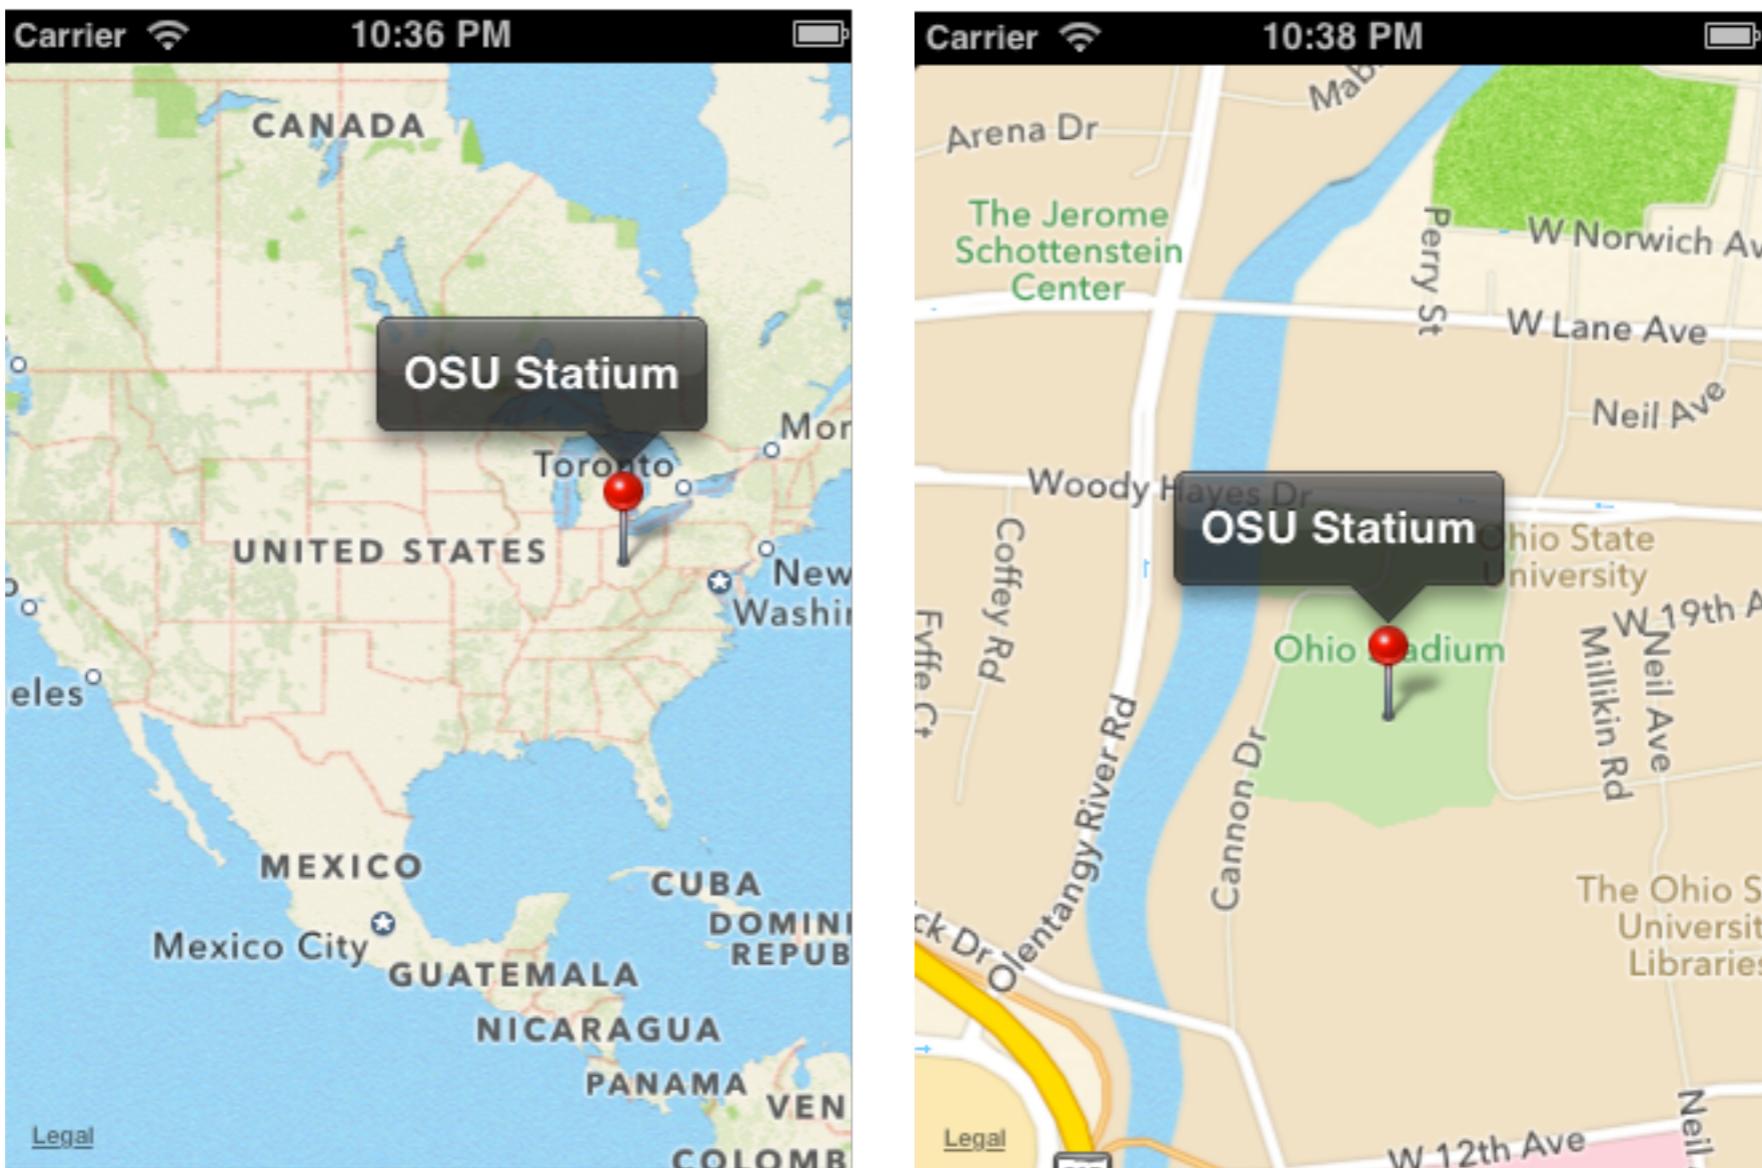

Add Annotation

```
CLLocationCoordinate2D coordinate = {40.001517, -83.019755};  
MKPointAnnotation* point = [MKPointAnnotation alloc];  
point.coordinate = coordinate;  
point.title = @"OSU Stadium";  
point.subtitle = @"Home of the Ohio State Buckeyes";  
  
[mapView addAnnotation:point];
```

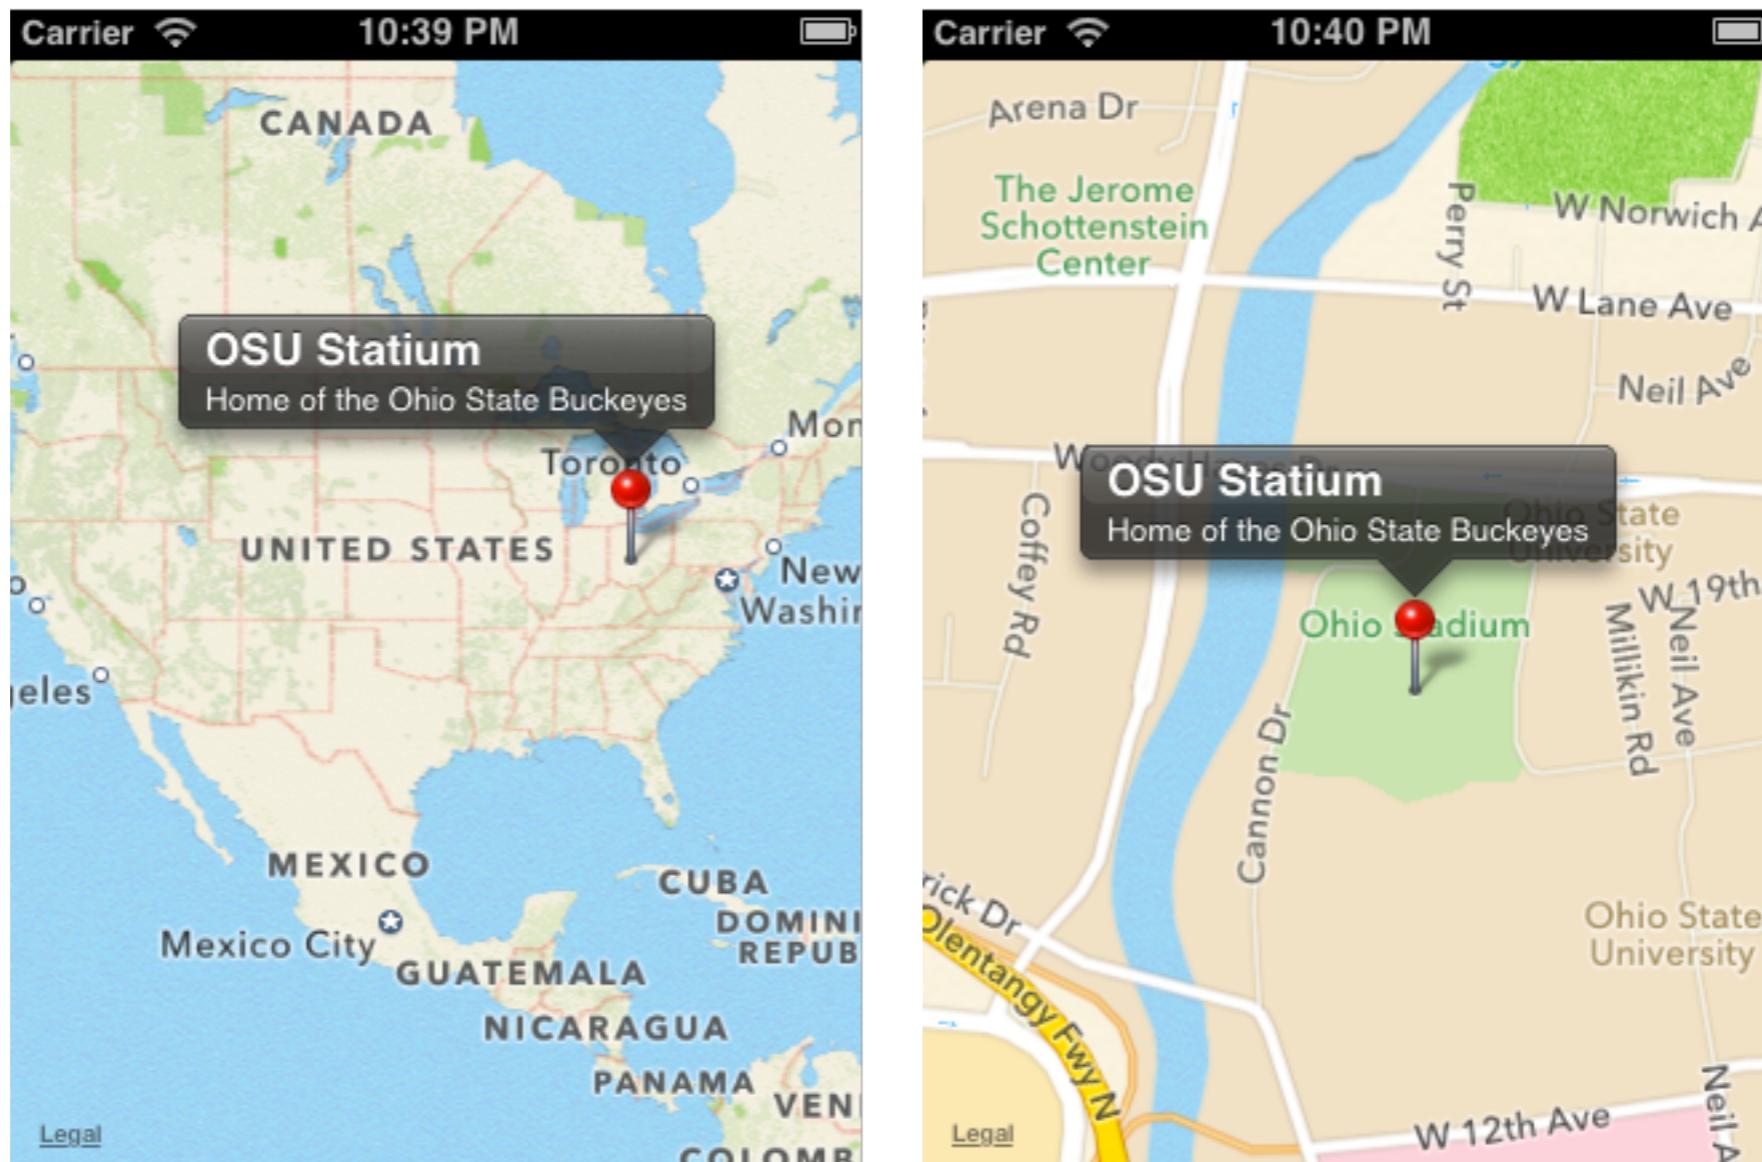

Custom Annotations

```
#import <Foundation/Foundation.h>
#import <MapKit/MapKit.h>

@interface JSCMHistoryMarker : NSObject <MKAnnotation>
    implement MKAnnotation
@property (nonatomic, assign) CLLocationCoordinate2D coordinate; required property
@property (nonatomic, copy) NSString *name;
@property (nonatomic, copy) NSString *description;
@property (nonatomic, assign) BOOL church;

+ (JSCMHistoryMarker*)createHistoryMarker:(NSString*) name latitude: (CLLocationDegrees)lat longitude: (CLLocationDegrees)lng;
+ (JSCMHistoryMarker*)createChurchMarker:(NSString*) name latitude: (CLLocationDegrees)lat longitude: (CLLocationDegrees)lng;

@end
```

```
#import "JSCMHistoryMarker.h"

@implementation JSCMHistoryMarker

@synthesize coordinate;
@synthesize name;
@synthesize description;
@synthesize church;

- (NSString *)title {
    return name;
}
- (NSString *)subtitle {
    return description;
}

// code removed for brevity
@end
```

optional properties

```
NSMutableArray* markers = [[NSMutableArray alloc] initWithCapacity:35];


[markers addObject:[JSCMHistoryMarker createHistoryMarker:@"Jesse Owens"
                                              latitude: 40.012314 longitude: -83.02796]];
[markers addObject:[JSCMHistoryMarker createHistoryMarker:@"Ohio State School for the Blind"
                                              latitude: 40.068763 longitude: -83.019]];
[markers addObject:[JSCMHistoryMarker createChurchMarker:@"St. Paul African Methodist Episcopal Church"
                                              latitude: 39.966964 longitude: -82.9834]];
[markers addObject:[JSCMHistoryMarker createHistoryMarker:@"The Ohio State Fair"
                                              latitude: 40.000943 longitude: -82.98899]];

[mapView addAnnotations: markers];
```




Positioning Map

Multiple Pins Can be hard to see from far away

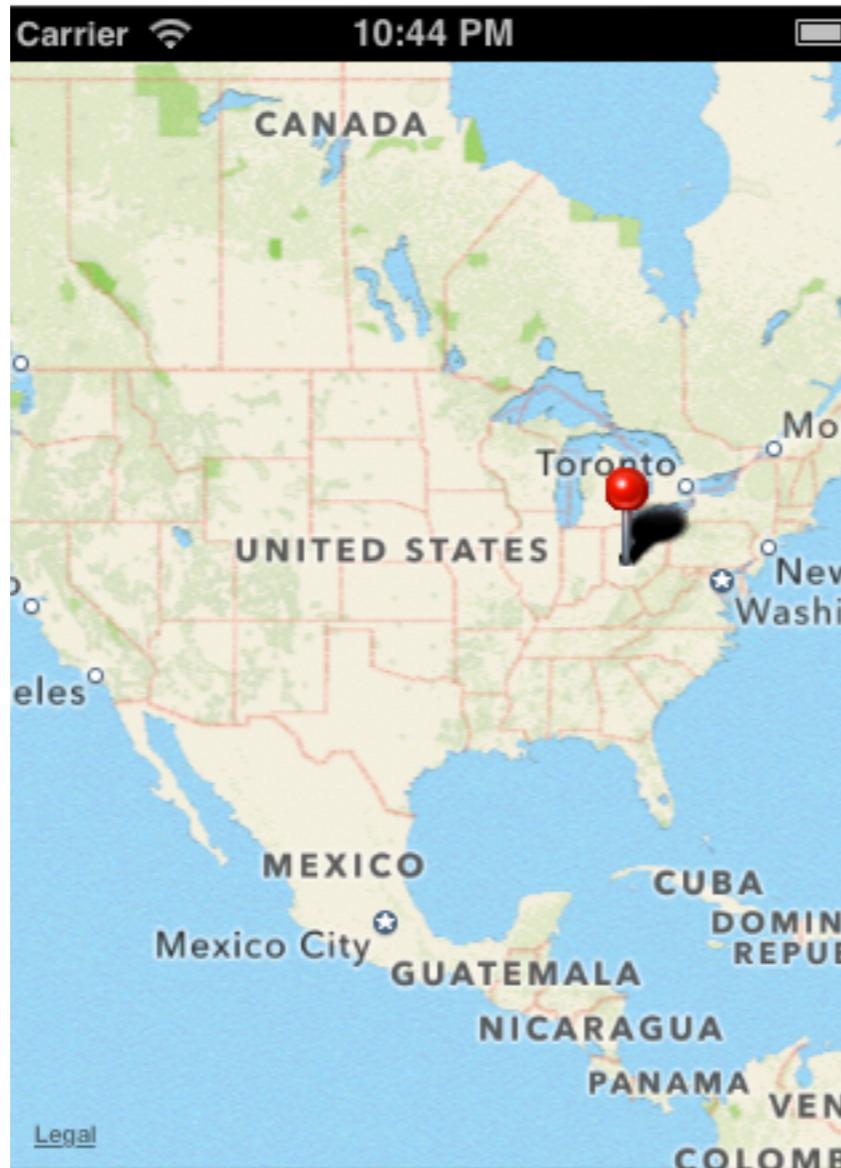

Applications with a geographical focus should frame the region


Zooming

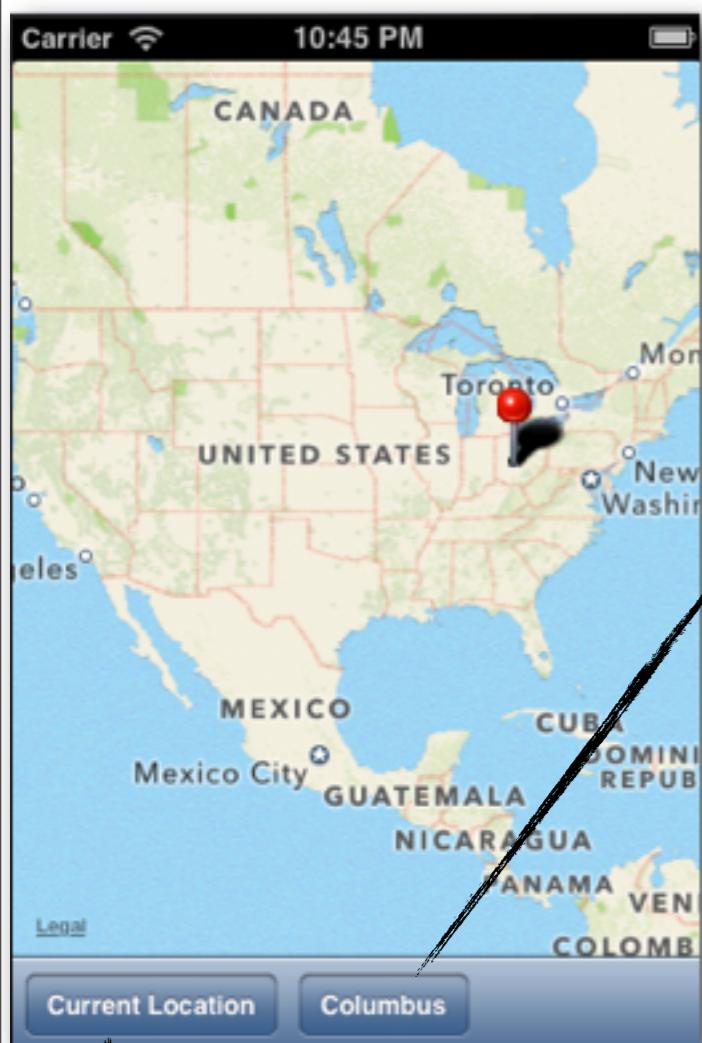

```
- (IBAction)zoomColumbus:(id)sender {
```

```
    CLLocationCoordinate2D columbusCenterCoordinate = {39.971793, -82.983396};  
    MKCoordinateSpan span = MKCoordinateSpanMake( 0.390456, 0.390456);  
    MKCoordinateRegion region = MKCoordinateRegionMake(columbusCenterCoordinate, span);  
    [mapView setRegion:region animated:TRUE];  
}
```


delta in
degrees

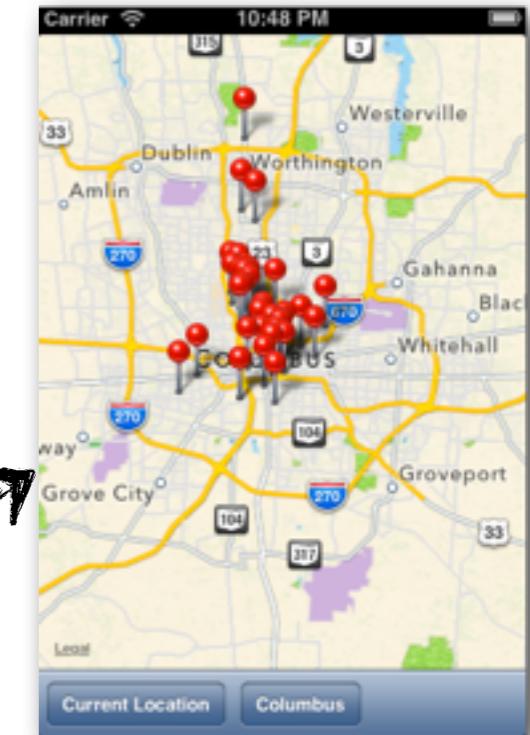

```
- (IBAction)zoomCurrentLocation:(id)sender {
```

```
    MKCoordinateRegion region = MKCoordinateRegionMakeWithDistance(  
        mapView.userLocation.location.coordinate, 500, 500);  
    [mapView setRegion:region animated:TRUE];
```

↑↑
meters

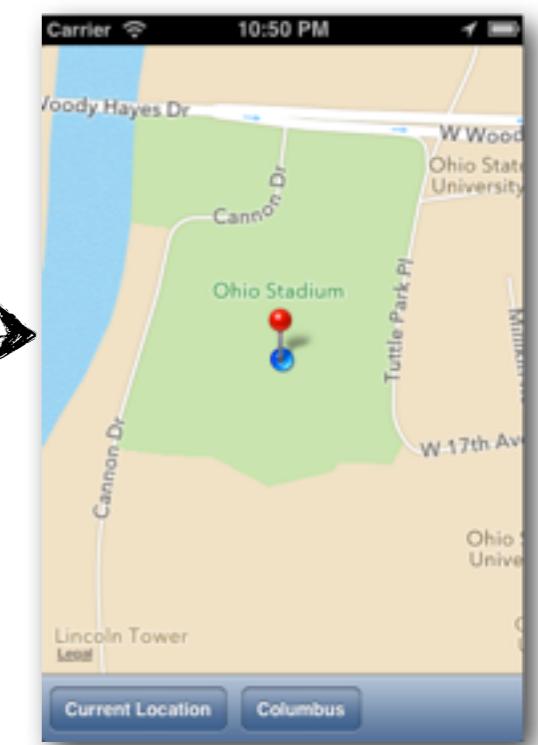

Decorating Annotations

Changing Annotation Appearance

*Controller.h

```
#import <UIKit/UIKit.h>
#import <MapKit/MapKit.h>

@interface JSCMViewController : UIViewController <MKMapViewDelegate>

@end
```

Add MapKit header

Implement MKMapViewDelegate protocol

*Controller.m

```
@interface JSCMViewController ()  
@property (weak, nonatomic) IBOutlet MKMapView *mapView;  
@end
```

```
@implementation JSCMViewController  
@synthesize mapView;
```

```
- (void)viewDidLoad {  
    [super viewDidLoad];  
    mapView.delegate = self;  
}
```

Assign delegate



Implement viewForAnnotation

```
- (MKAnnotationView *)mapView:(MKMapView *)aMapView viewForAnnotation:(id < MKAnnotation >)annotation {  
    return nil;  
}
```

Returning nil will perform default behavior

```
// Details removed for brevity
```

```
@end
```


MKAnnotation = data

MKAnnotationView = presentation

Default Annotations


```
- (MKAnnotationView *)mapView:(MKMapView *)aMapView viewForAnnotation:(id < MKAnnotation >)annotation {  
    return nil;  
}
```

red pins
current location blue dot

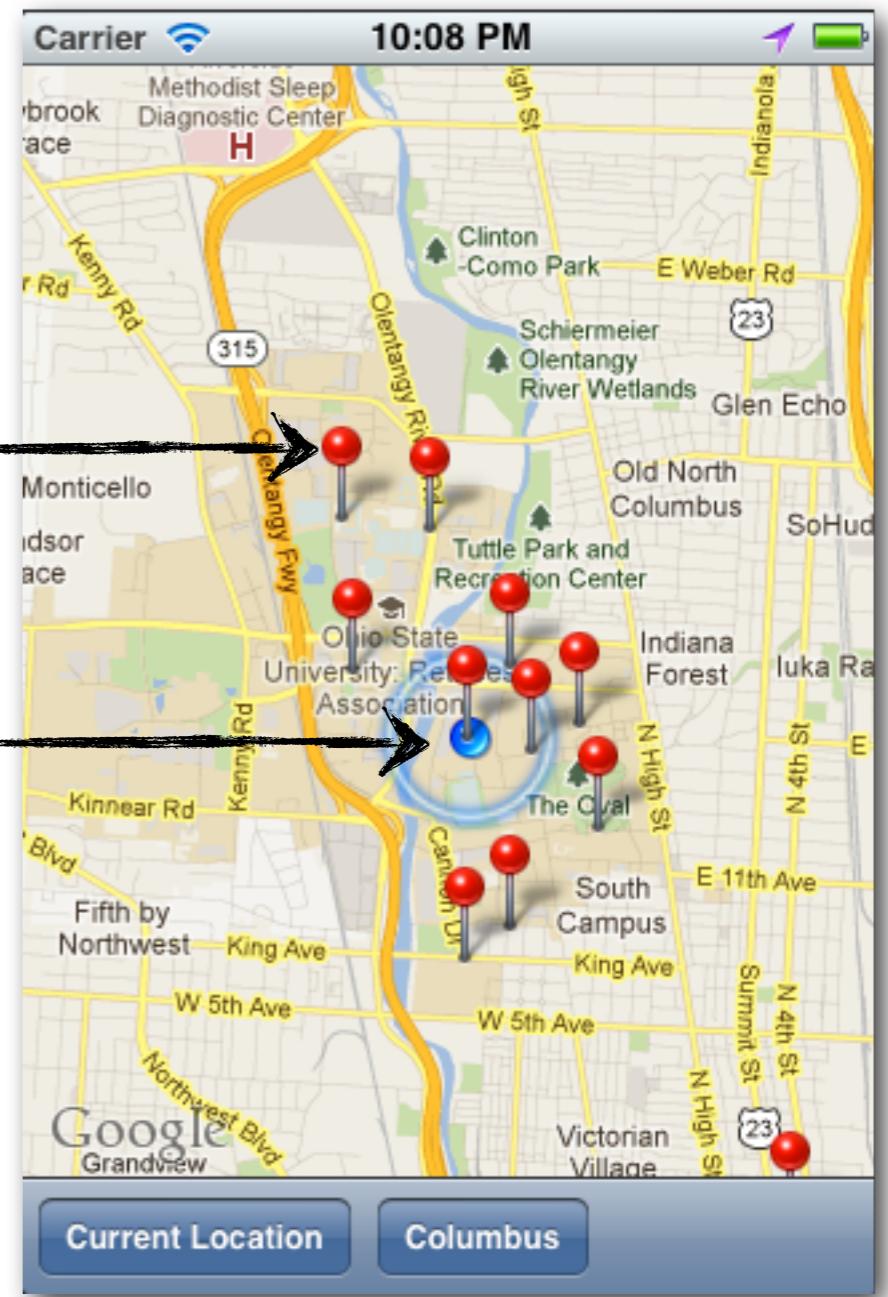

Coloring Pins

```
- (MKAnnotationView *)mapView:(MKMapView *)aMapView viewForAnnotation:(id < MKAnnotation >)annotation {
    if(annotation == mapView.userLocation) {return nil;}
    MKPinAnnotationView *annotationView =
        (MKPinAnnotationView*)[mapView dequeueReusableCellWithIdentifier:@"marker"];
    if(nil == annotationView) {
        annotationView = [[MKPinAnnotationView alloc] initWithAnnotation:annotation reuseIdentifier:@"marker"];
        annotationView.pinColor = MKPinAnnotationColorPurple;
    }
    return annotationView;
}
```

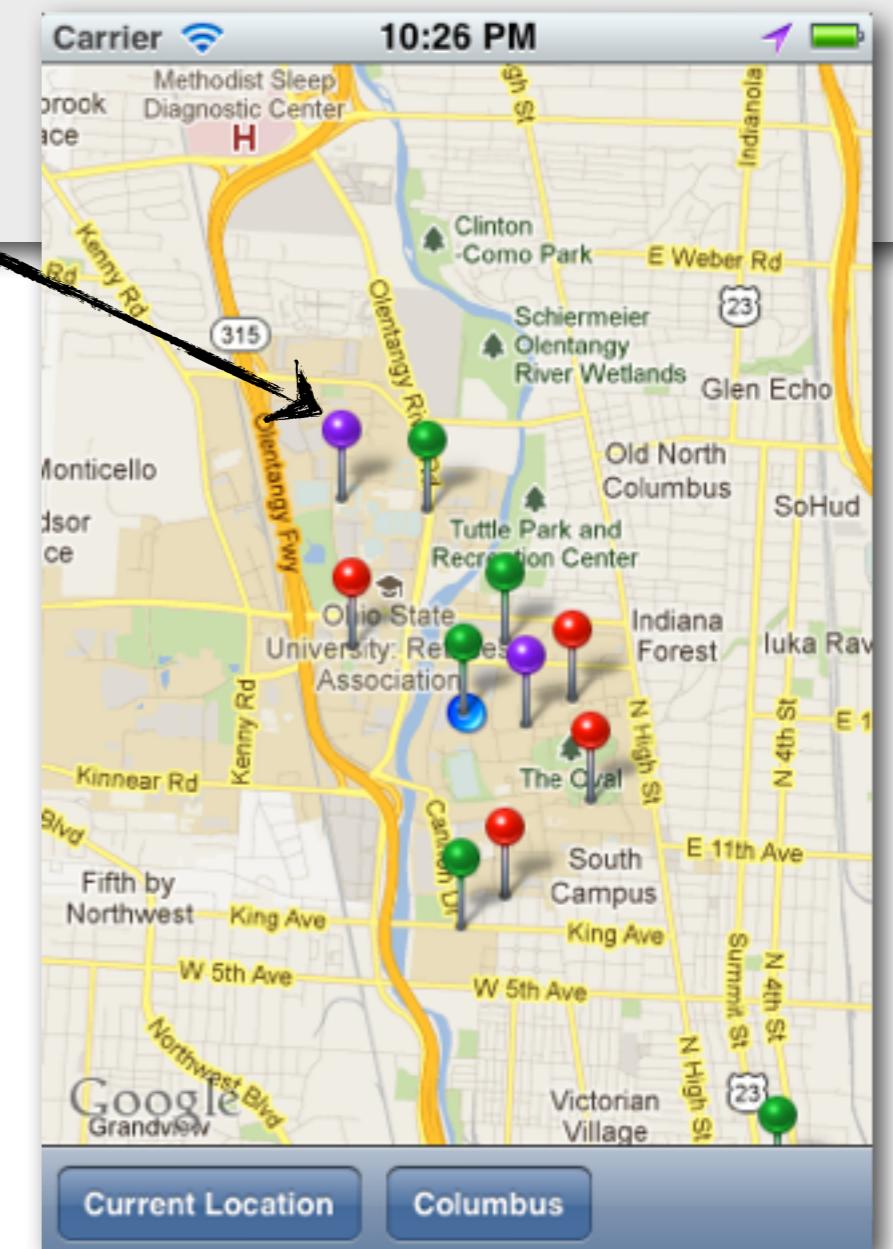


Limited to 3 colors

MKPinAnnotationColorPurple
MKPinAnnotationColorRed
MKPinAnnotationColorGreen

Annotation Images

```
- (MKAnnotationView *)mapView:(MKMapView *)aMapView viewForAnnotation:(id < MKAnnotation >)annotation {
    if(annotation == mapView.userLocation) {return nil;}
    MKAnnotationView *annotationView =
        (MKAnnotationView*)[mapView dequeueReusableCellWithIdentifier:@"marker"];
    if(nil == annotationView) {
        annotationView = [[MKAnnotationView alloc] initWithAnnotation:annotation reuseIdentifier:@"marker"];
        annotationView.image = [UIImage imageNamed:@"history.png"];
    }
    return annotationView;
}
```

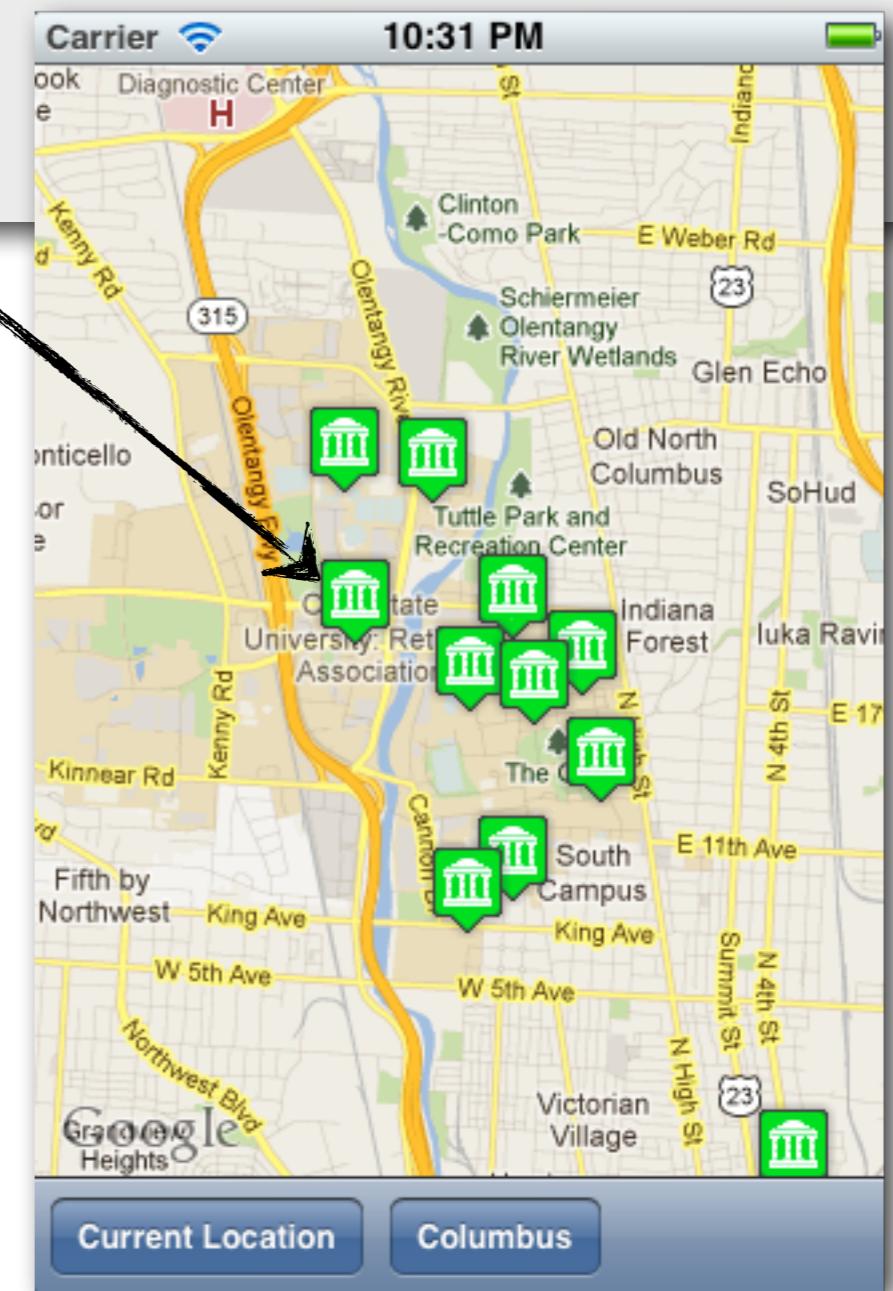


Center Offset

```
- (MKAnnotationView *)mapView:(MKMapView *)aMapView viewForAnnotation:(id < MKAnnotation >)annotation {
    if(annotation == mapView.userLocation) {return nil;}

    MKAnnotationView *annotationView =
        (MKAnnotationView*)[mapView dequeueReusableCellWithIdentifier:@"marker"];
    if(nil == annotationView) {
        annotationView = [[MKAnnotationView alloc] initWithAnnotation:annotation reuseIdentifier:@"marker"];
        annotationView.image = [UIImage imageNamed:@"history.png"];

        CGPoint offsetPoint = CGPointMake(-8, 0);
        [annotationView setCenterOffset:offsetPoint];
    }

    return annotationView;
}
```

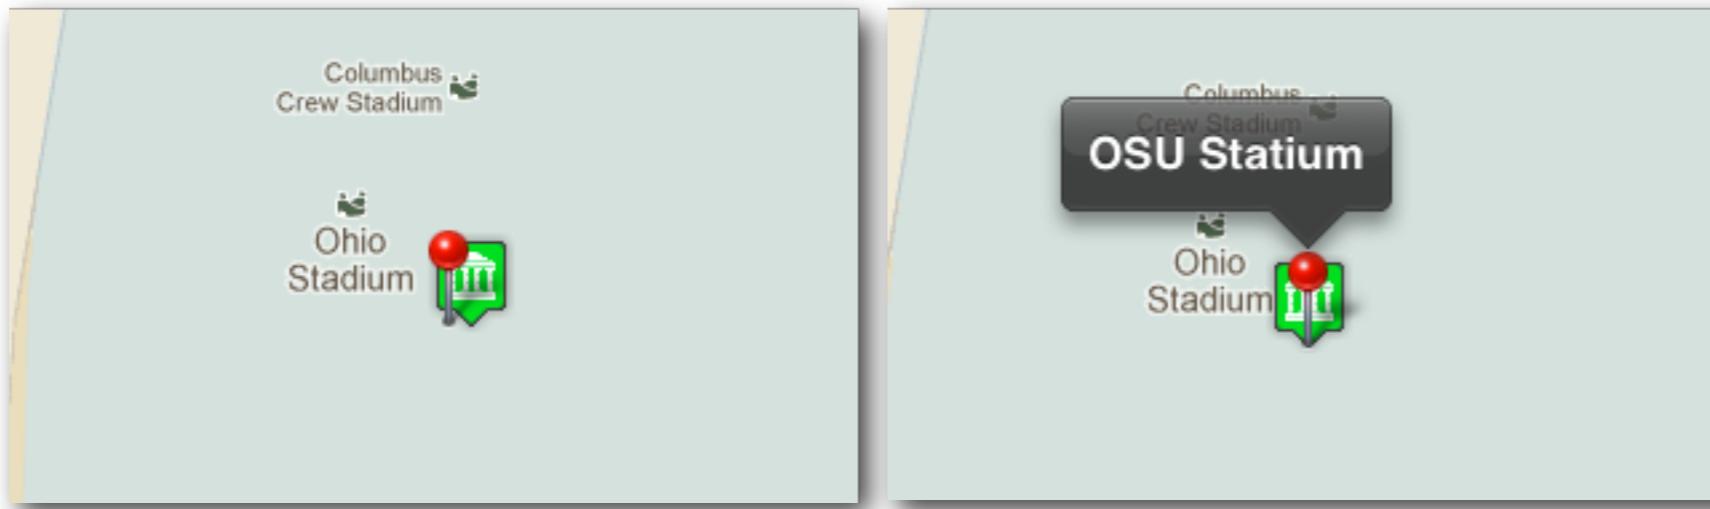

pins are placed using the center point

Free Map Icons

<http://code.google.com/p/google-maps-icons/>

Administration, Office & Industry



Culture & Entertainment



Education & Kids



All the icons [described and tagged](#).


Events & Weather



All the icons in this Icon Category [described and tagged](#).


All the icons [described and tagged](#).

All the icons [described and tagged](#).

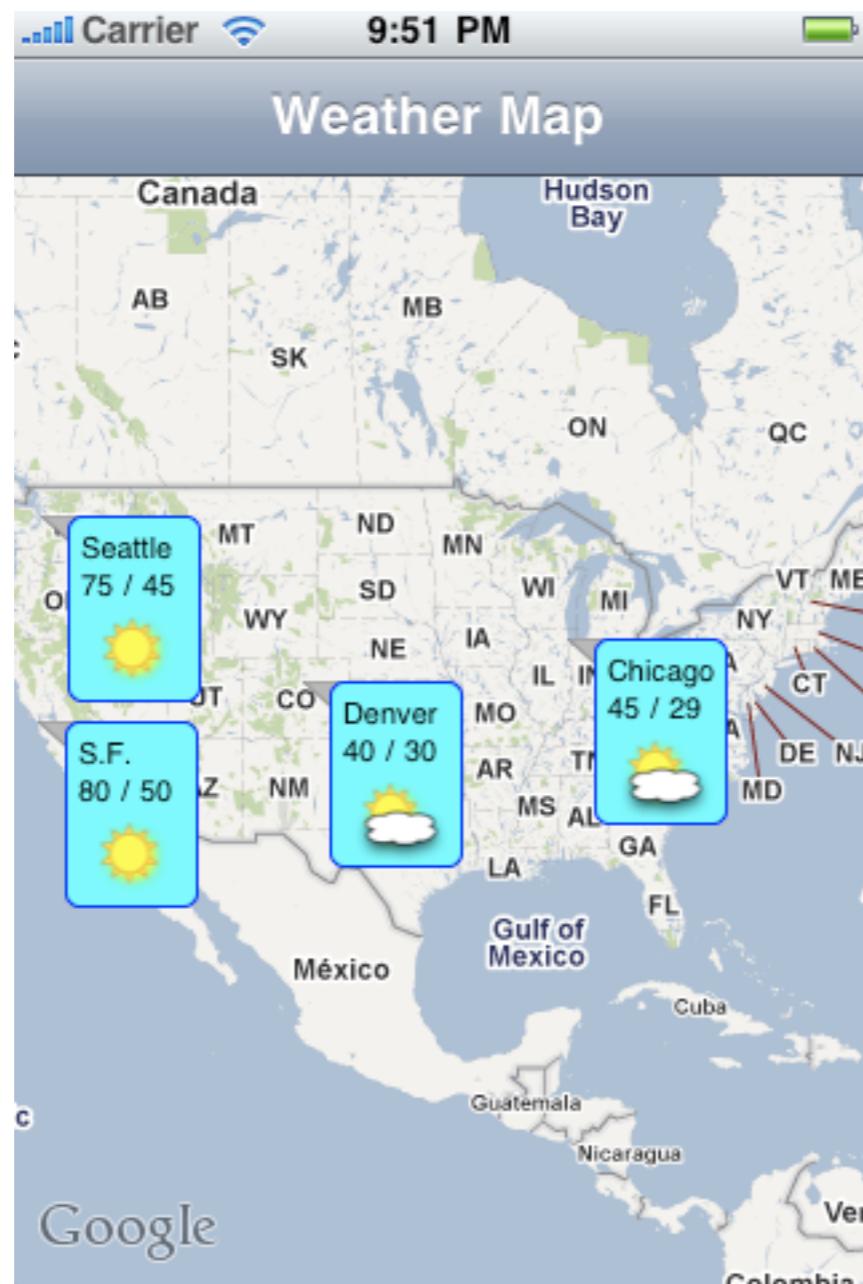


Be Creative

Precision

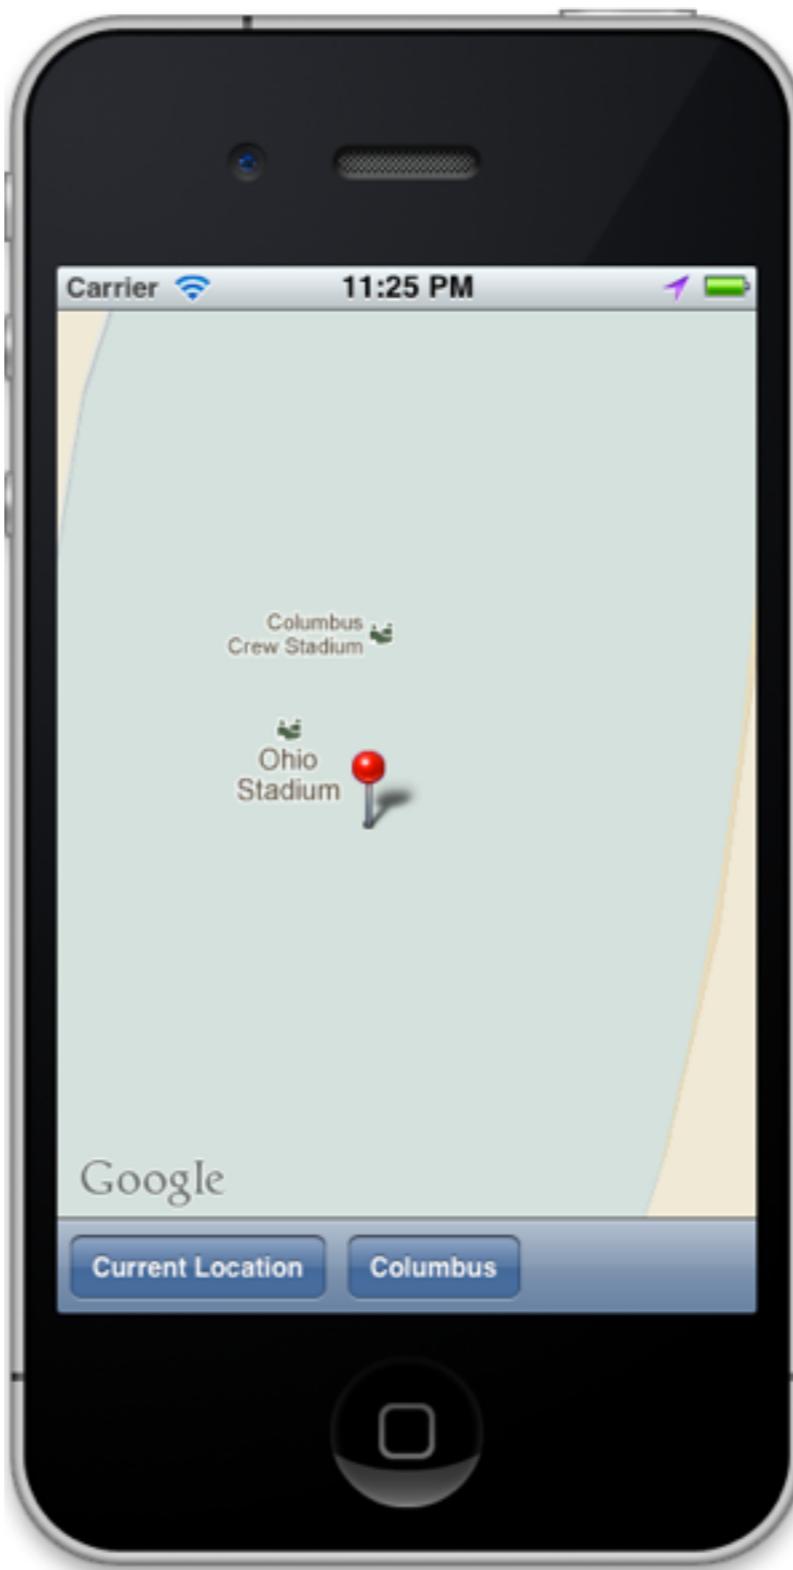


{40.001517, -83.019755}

Precision

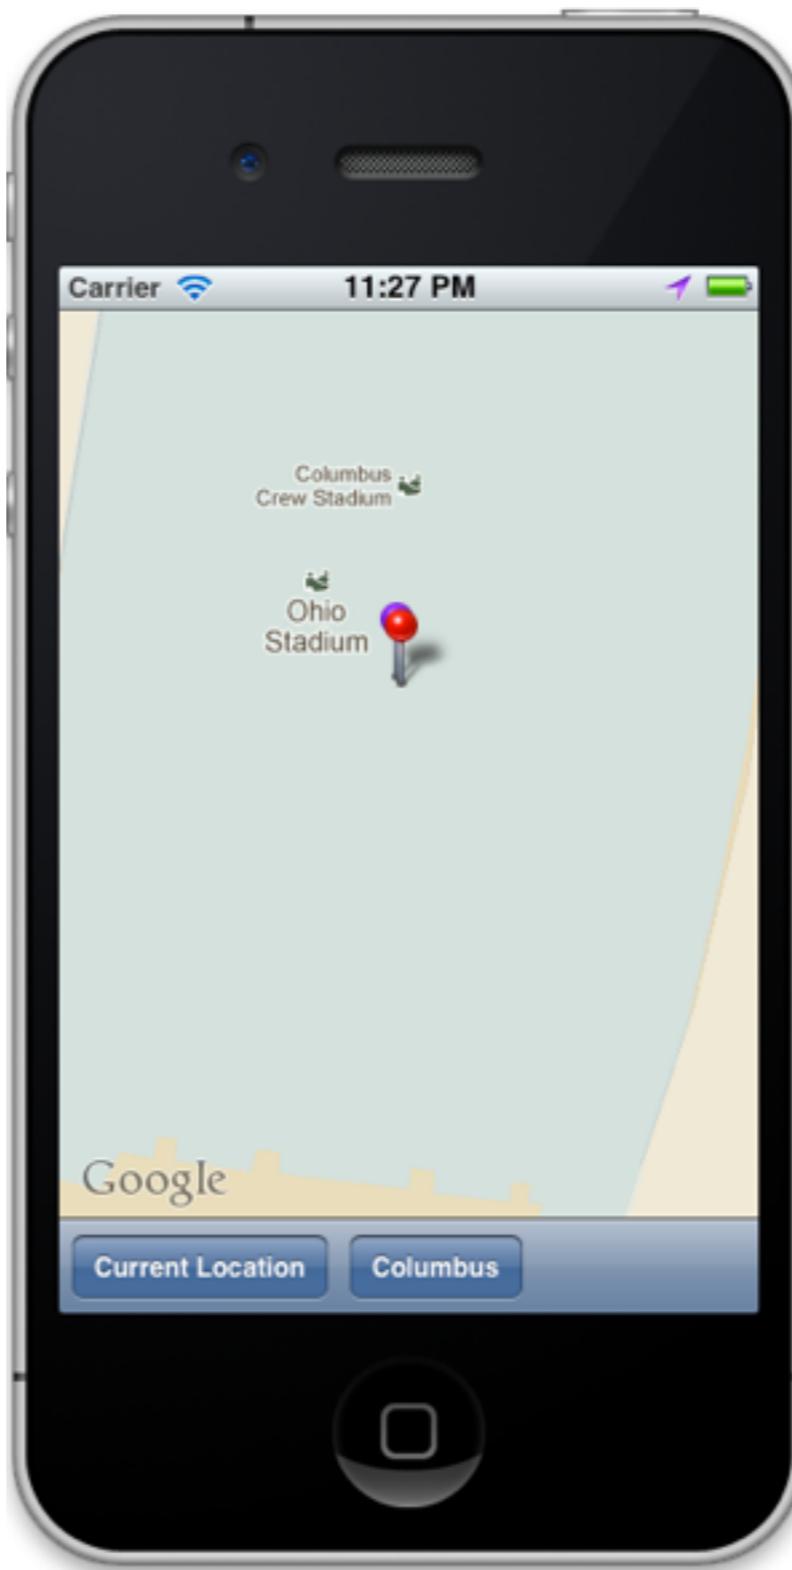


{40.00151, -83.01975}

Precision

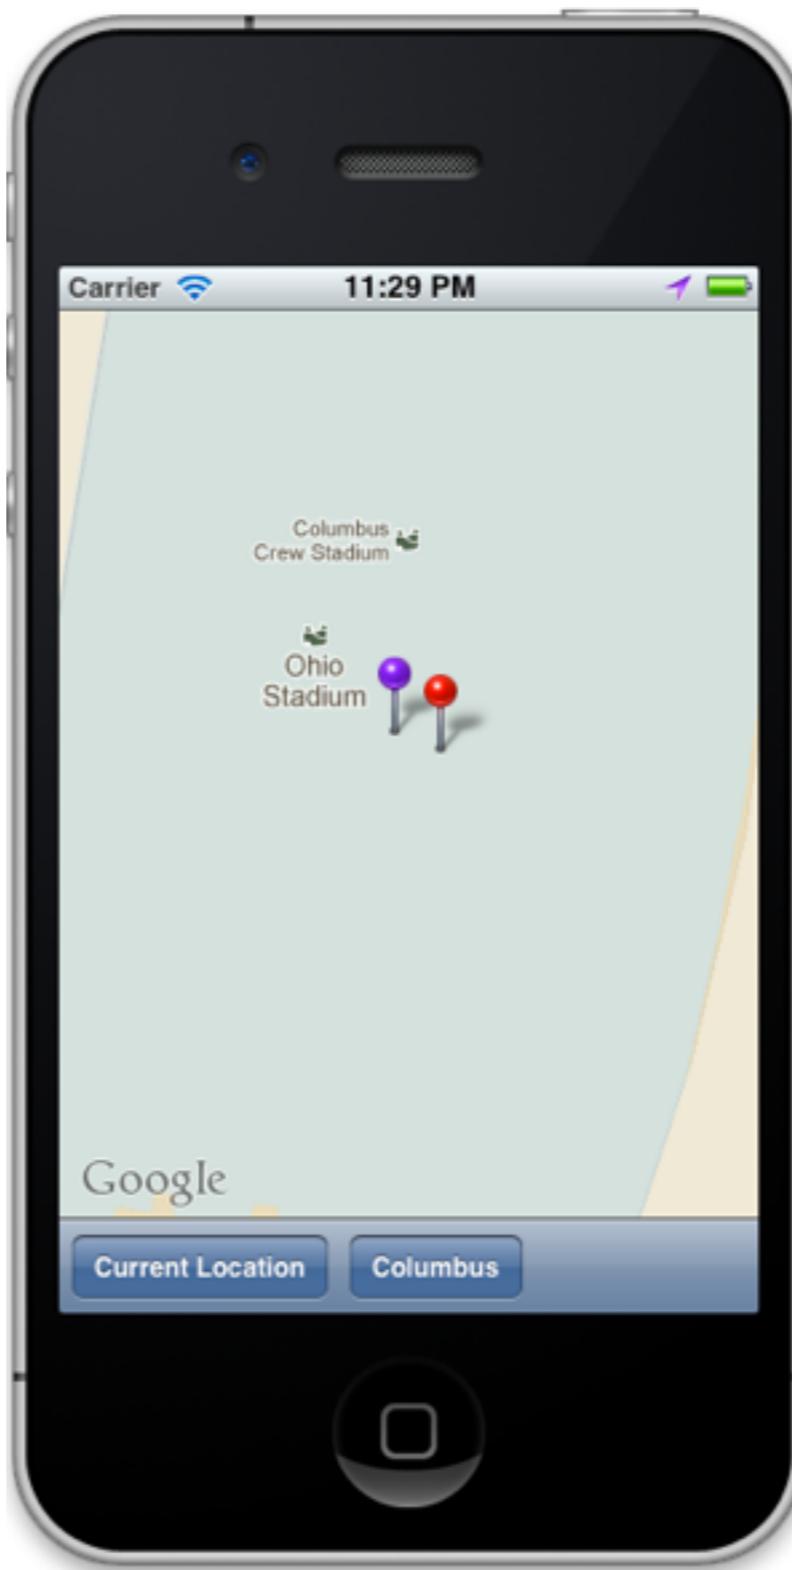


{40.0015, -83.0197}

Precision

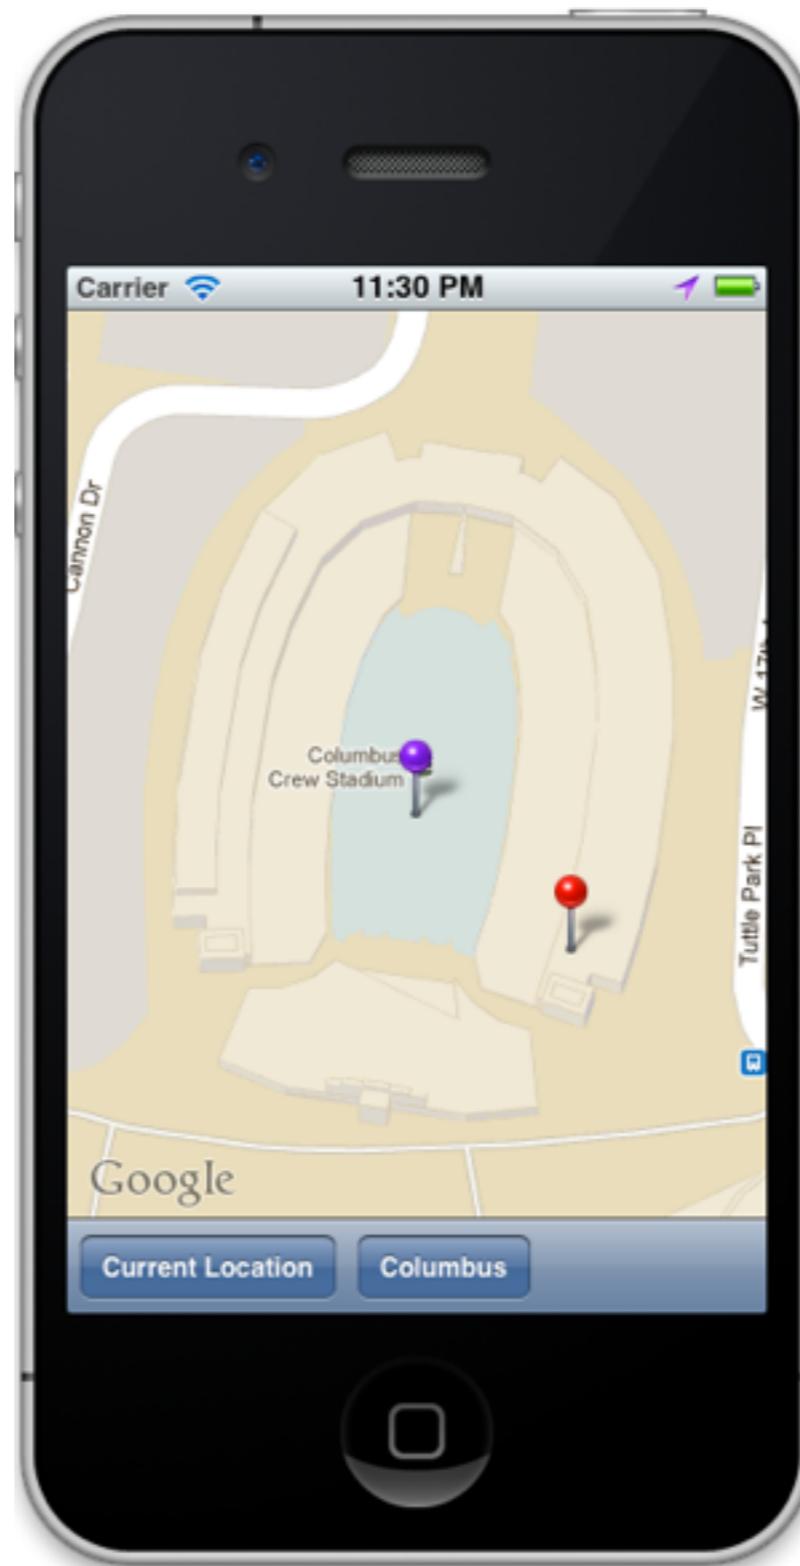

{40.001, -83.019}

Precision

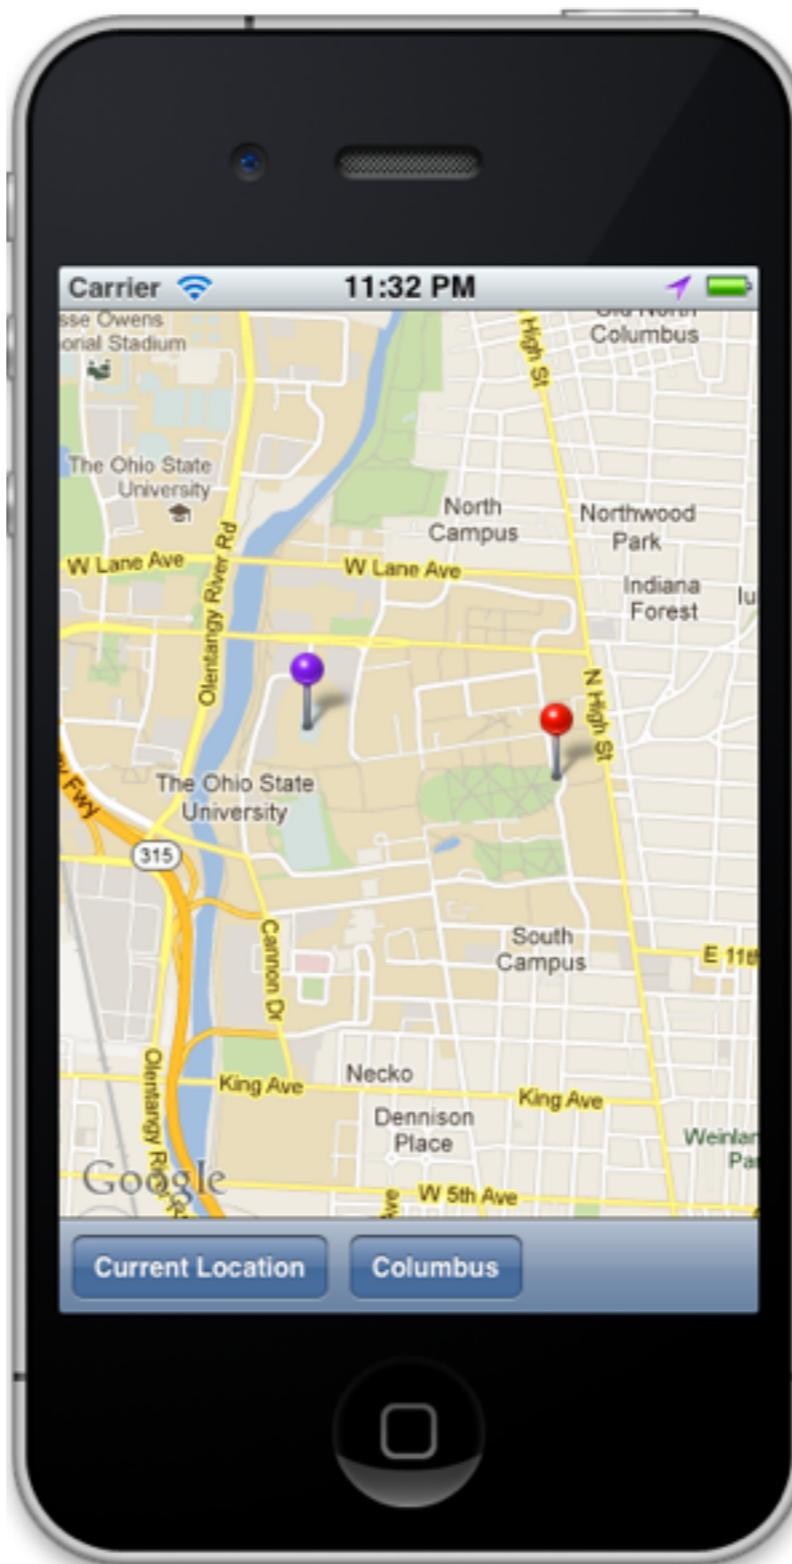


{40.00, -83.01}

Precision

make sure the incoming data is as qualified as possible

don't loose precision

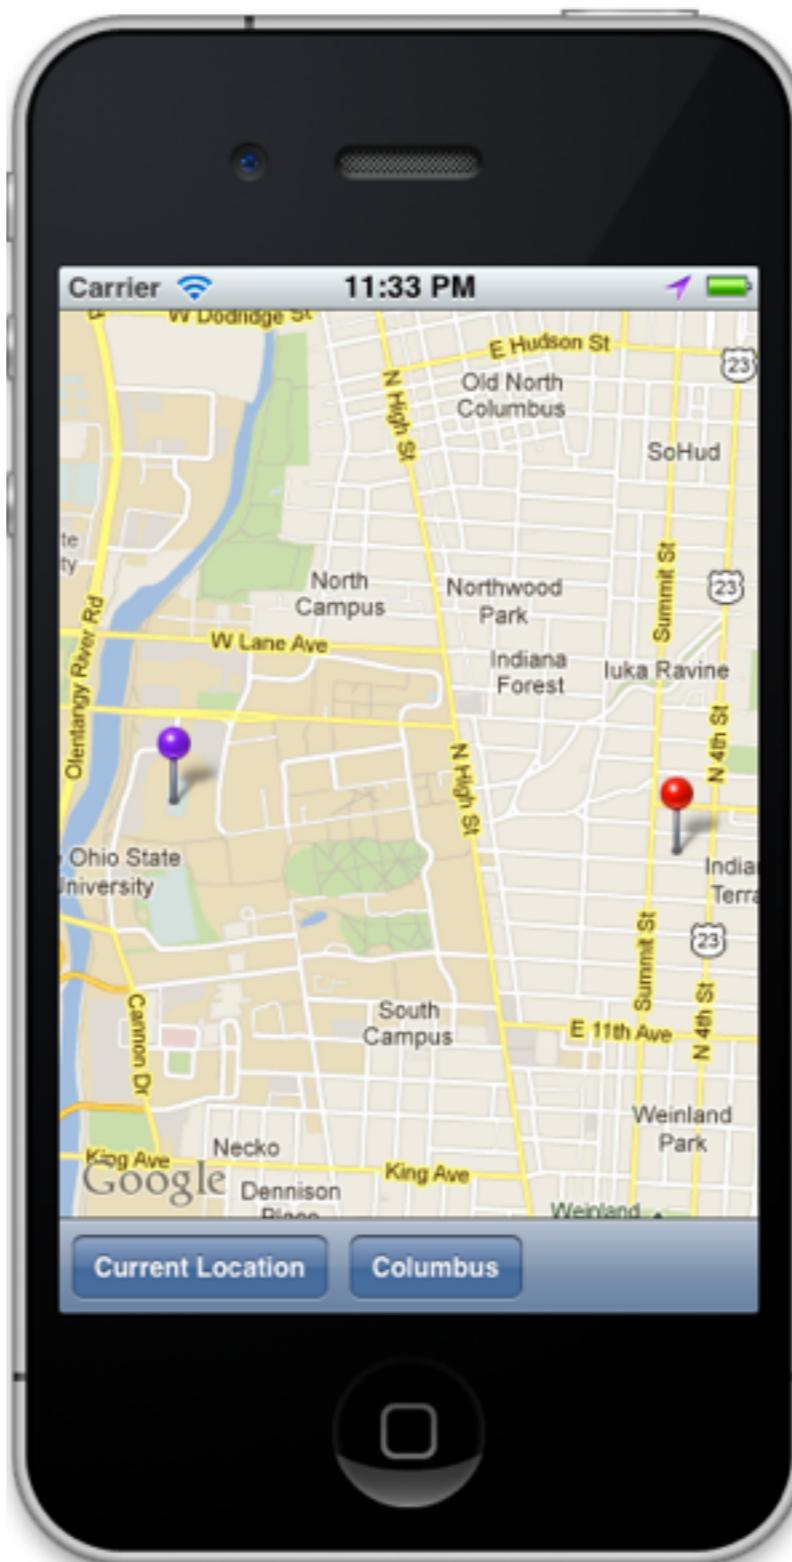


{40.0, -83.0}

Callouts

Enable Callouts

```
- (MKAnnotationView *)mapView:(MKMapView *)aMapView viewForAnnotation:(id < MKAnnotation >)annotation {  
    if(annotation == mapView.userLocation) {return nil;}  
  
    MKAnnotationView *annotationView =  
        (MKAnnotationView*)[mapView dequeueReusableCellWithIdentifier:@"marker"];  
    if(nil == annotationView) {  
        annotationView = [[MKAnnotationView alloc] initWithAnnotation:annotation reuseIdentifier:@"marker"];  
        annotationView.image = [UIImage imageNamed:@"history.png"];  
        annotationView.canShowCallout = YES;  
    }  
    Set canShowCallout  
    return annotationView;  
}
```

```
CLLocationCoordinate2D coordinate = {40.001517  -83.019755};  
MKPointAnnotation* point = [MKPointAnnotation alloc];  
point.coordinate = coordinate;  
point.title = @"OSU Stadium";  
point.subtitle = @"Home of the Ohio State Buckeyes";
```

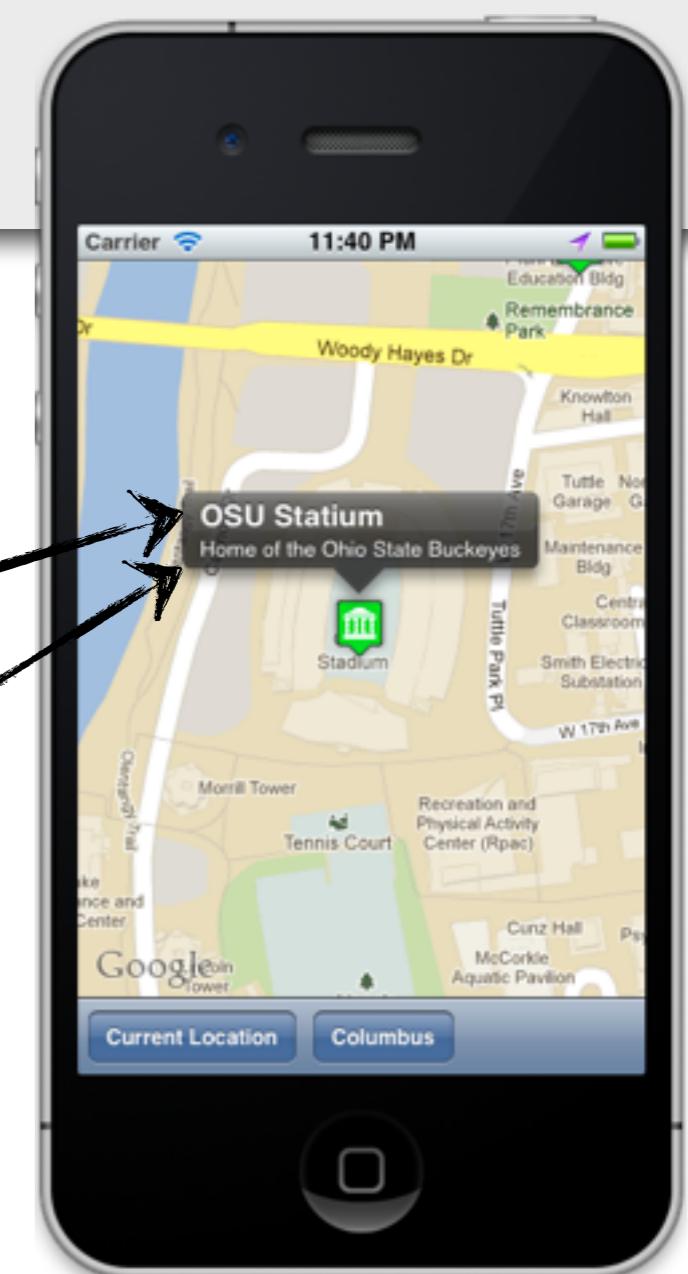


Add Behavior to Callouts

```
- (MKAnnotationView *)mapView:(MKMapView *)aMapView viewForAnnotation:(id < MKAnnotation >)annotation {  
    if(annotation == mapView.userLocation) {return nil;}  
  
    MKAnnotationView *annotationView =  
        (MKAnnotationView*)[mapView dequeueReusableCellWithIdentifier:@"marker"];  
    if(nil == annotationView) {  
        annotationView = [[MKAnnotationView alloc] initWithAnnotation:annotation reuseIdentifier:@"marker"];  
        annotationView.rightCalloutAccessoryView = [UIButton buttonWithType:UIButtonTypeDetailDisclosure];  
        annotationView.image = [UIImage imageNamed:@"history.png"];  
        annotationView.canShowCallout = YES;  
    }  
  
    return annotationView;  
}
```



Implement calloutAccessoryControlTapped



```
- (void)mapView:(MKMapView *)mapView annotationView:  
    (MKAnnotationView *)view  
calloutAccessoryControlTapped:(UIControl *)control  
{  
  
    NSLog(@"%@", view.annotation.title);  
    //Could open a detail view, navigate to a website, call, etc.  
}
```

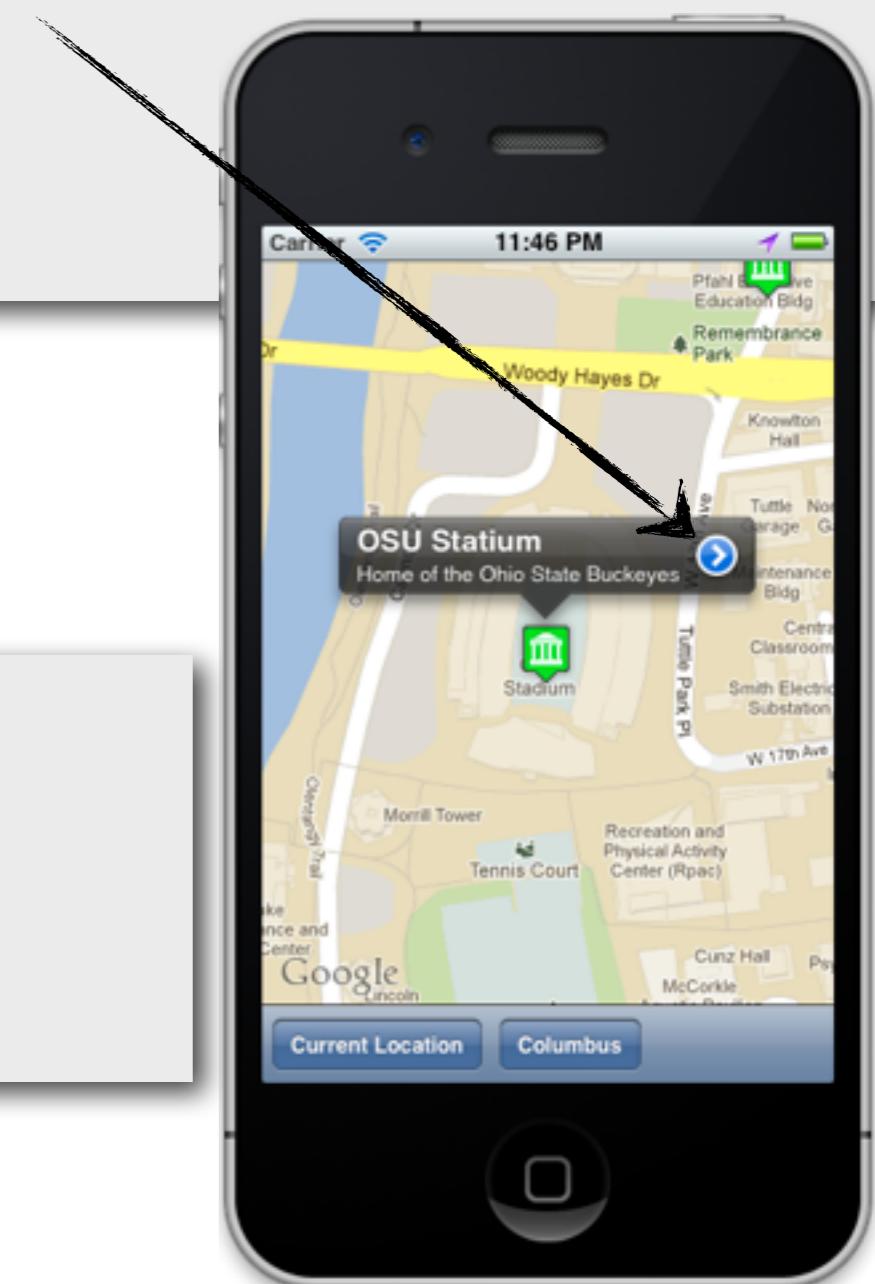

Directions

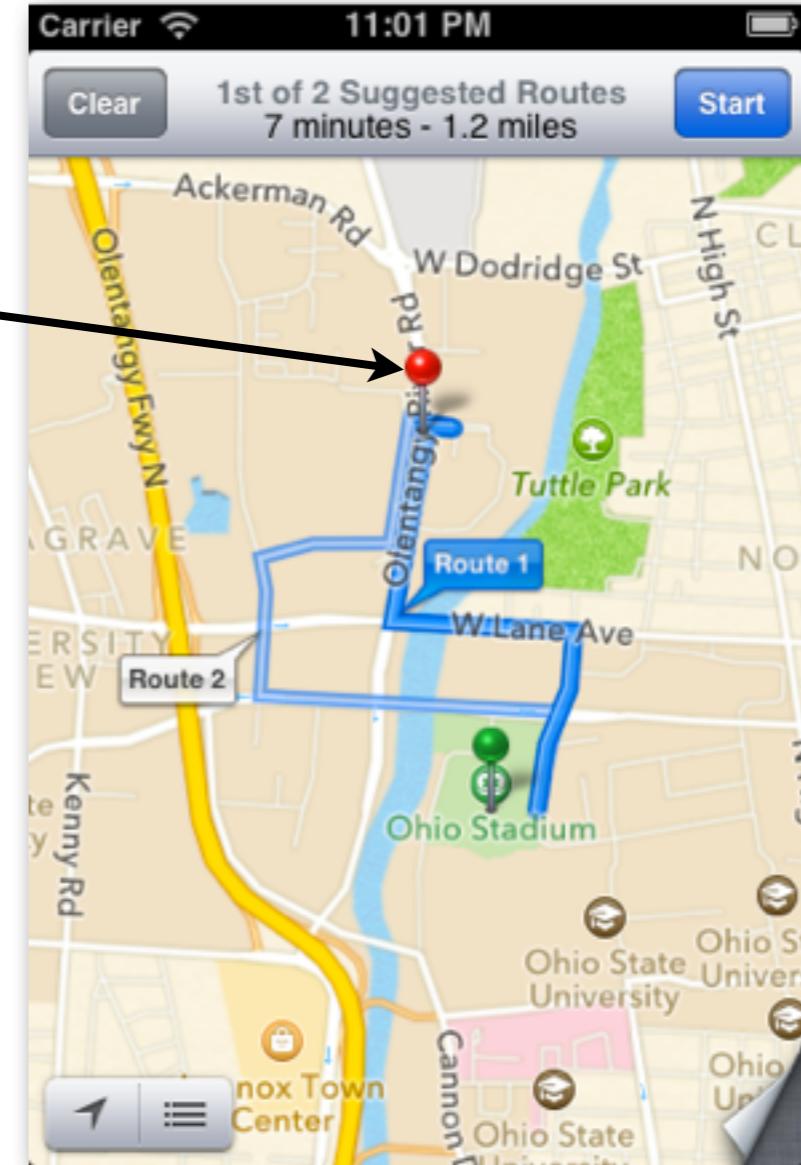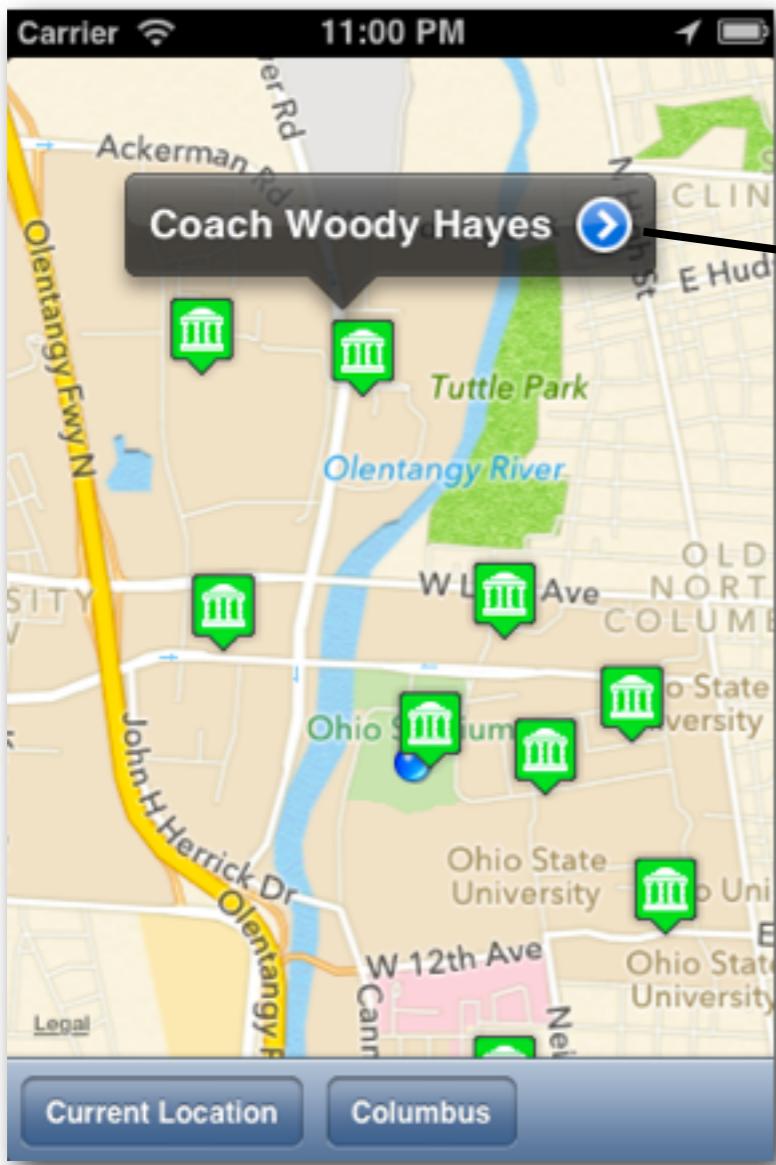

```
- (void)mapView:(MKMapView *)mapView annotationView:(MKAnnotationView *)view calloutAccessoryControlTapped:(UIControl *)control {  
  
    HistoryMarker* historyMarker = (HistoryMarker*)view.annotation;  
  
    NSString* url = [NSString stringWithFormat:@"http://maps.apple.com/maps?daddr=%f,%f&saddr=%f,%f",  
                     historyMarker.coordinate.latitude, historyMarker.coordinate.longitude,  
                     mapView.userLocation.location.coordinate.latitude,  
                     mapView.userLocation.location.coordinate.longitude];  
    [[UIApplication sharedApplication] openURL:[NSURL URLWithString:url]];  
}
```


https://developer.apple.com/library/ios/#featuredarticles/iPhoneURLScheme_Reference/Articles/MapLinks.html

Overlays

Overlays

```
CLLocationCoordinate2D topLeftLatLong = {40.116940, -83.144531};  
MKMapPoint topLeftPoint = MKMapPointForCoordinate(topLeftLatLong);  
CLLocationCoordinate2D topRightLatLong = {40.143190, -82.926178};  
MKMapPoint topRightPoint = MKMapPointForCoordinate(topRightLatLong);  
CLLocationCoordinate2D bottomLeftLatLong = {39.925535, -83.129425};  
MKMapPoint bottomLeftPoint = MKMapPointForCoordinate(bottomLeftLatLong);  
CLLocationCoordinate2D bottomRightLatLong = {39.874966, -82.894592};  
MKMapPoint bottomRightPoint = MKMapPointForCoordinate(bottomRightLatLong);  
  
MKMapPoint points[4] = { topLeftPoint, topRightPoint, bottomRightPoint, bottomLeftPoint };  
  
MKPolygon* columbusOverlay = [MKPolygon polygonWithPoints:points count:4];  
[mapView addOverlay:columbusOverlay];
```

```
- (MKOverlayView *)mapView:(MKMapView *)mapView  
    viewForOverlay:(id <MKOverlay>)overlay  
{  
    MKPolygonView* view = nil;  
    if ([overlay isKindOfClass:[MKPolygon class]]) {  
        view = [[MKPolygonView alloc] initWithPolygon:(MKPolygon*)overlay];  
        view.fillColor = [[UIColor redColor] colorWithAlphaComponent:0.1];  
        view.strokeColor = [[UIColor redColor] colorWithAlphaComponent:0.8];  
        view.lineWidth = 2;  
    }  
    return view;  
}
```

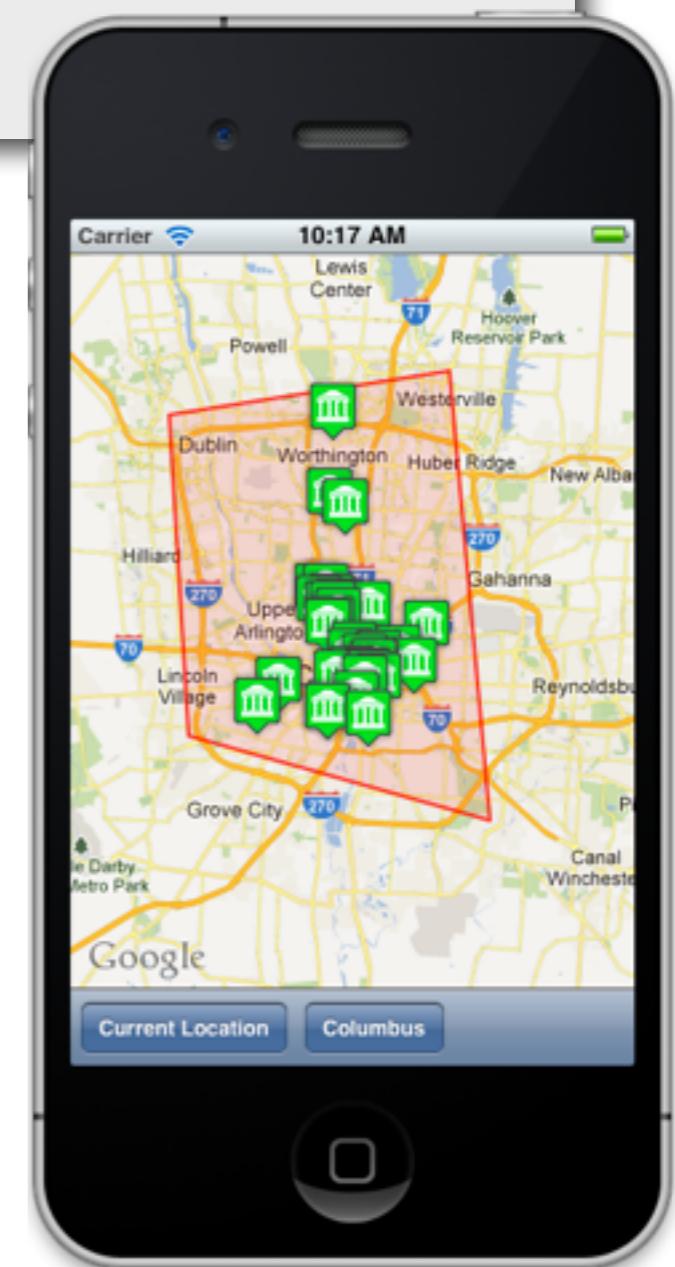

Alternatives

Why MapKit

- easy to implement
- apple support
 - WWDC videos
- well documented
- Demos Actually Compile!

Why Not MapKit

- area required is not well covered
- routing and turn-by-turn needed
- alternative tiles desired
- advertising or other data sets
- offline use




route-me

Open source iPhone-native slippy map.

New Free BSD



OpenStreetMap



The Free Wiki World Map

bing™



<http://code.google.com/p/route-me/>



[See some examples](#)

New Release Coming Soon...

Includes:

- Native support
- Sponsored Points of Interest and more...



Bring your own maps? Bring **CloudMade** Maps.

The iPhone Maps Library lets you build interactive mapping applications for the iPhone. With this API you can:

- Build applications that give users a rich mapping experience on the iPhone
- Benefit from our tile servers which deliver mobile optimized maps to your users
- Easily integrate with the iPhone's location API to show your user's position in real time
- Get more with CloudMade maps than with Google

Feature	Google	CloudMade
Multiple map styles	✗	✓
Customizable map styles	✗	✓
Vehicle, Pedestrian, Cycle Routing	✗	✓
Forward Geocoding	✗	✓
Reverse Geocoding	✓	✓
Open source, user extendable library	✗	✓

<http://developers.cloudmade.com/projects/show/iphone-api>



No Preset Limit on Free Maps



BUSINESS MANAGERS

[Why MapQuest?](#)

MapQuest has been providing business solutions for nearly 15 years, combining top-notch service and support with easy-to-use technology. As we continue to invest in our services, we consider our clients' needs first. If you're looking for a reliable platform backed by a trusted organization, partner with MapQuest.

- [Why MapQuest?](#)



DEVELOPERS

[Resources & Documentation](#)

Our APIs and Web Services enable powerful mapping applications on the desktop, web or mobile. You can choose between commercial data providers or crowdsourced OpenStreetMap data. Take advantage of easy mobile mapping tools to enable rich mobile web or native applications.

- [Quick Start for Developers](#)




BLOGGERS & WEB DESIGNERS

[Easy Mapping Tools](#)

Adding a map to your website or blog is easy as copy and paste. Grab a custom map, driving directions or even a whole day's errands and link or embed it in your own website - for FREE.

- [Quick Start for Easy Mapping Tools](#)

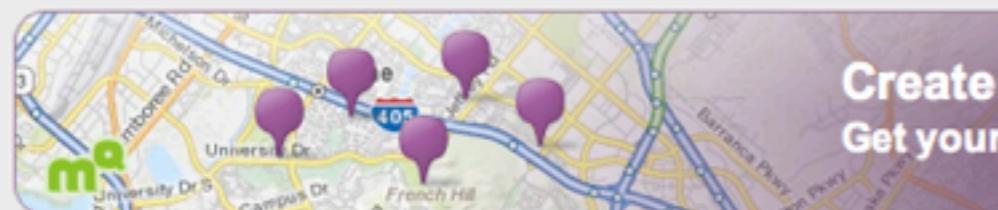

Create a MapQuest Developer Account
Get your AppKey and start developing today.

[Join Now](#)

<http://developer.mapquest.com/>

Download Center

[Products](#) [Categories](#) [Security](#) [Support](#)

Bing Maps Control for iOS



Quick links

- [↓ Overview](#)
- [↓ System requirements](#)
- [↓ Instructions](#)

Looking for support?

[Visit the Microsoft Support site now >](#)

Add Bing maps to your native iOS apps

Quick details

Version:	1.1	Date published:	5/3/2011
Language:	English		

File name	Size	
BingMapsiOS-1.1.dmg	6.5 MB	DOWNLOAD

Overview

The Bing Maps iOS Control is an Objective-C control for embedding maps directly into native iOS apps. With a rich, gesture-based UI provided by Seadragon, the Bing Maps iOS Control provides support for adding pushpins and other overlays to the map, allows your device location to be displayed, and provides the ability to retrieve contextual information for a given map location.

[↑ Top of page](#)

System requirements

Supported operating systems: Mac OS X

Mac OS X Snow Leopard, version 10.6.4 or later on a Macintosh computer with an Intel x86 processor.

- Xcode version 4.0 or later
- The latest version of the iOS SDK. (This SDK is available from <http://developer.apple.com>. An Apple Developer account is required.)

[↑ Top of page](#)

<http://www.microsoft.com/en-us/download/details.aspx?id=1112>



iOS SDK

If you've found yourself on this page, we're assuming you've

- ⊕ Signed up for a MapBox account and [logged in](#).
- ⊕ Created or [uploaded](#) a map to MapBox.
- ⊕ Customized your map style to your liking (optional).
- ⊕ Familiarized yourself with basic iOS development in Xcode 4.
- ⊕ Ensured that your project supports iOS 5.0 or greater.

The [MapBox iOS SDK](#) is based on the [Route-Me](#) open source project ([Alpstein fork](#)) and is quite similar in behavior to Apple's [MapKit](#) framework, but with much greater flexibility for visual styling, offline use, and general customizability – plus it's open source!

SDK Installation (Binary)

Follow these steps in order to use the MapBox iOS SDK within your own Xcode 4 project in the fastest way possible.

1. Obtain the TileJSON URL for your map by going to the [Info](#) tab, clicking [Embed](#), and copying the [TileJSON](#) URL. This URL contains all the metadata needed by the SDK in order to serve your map.
2. Download the latest SDK binary release from the [downloads](#) and drag `MapBox.framework` into your project's `Frameworks` section, adding it to your target.

Mobile

+ Developers

iOS SDK

Offline use


Retina

+ Guide

+ Apps

<http://mapbox.com/mobile/docs/sdk/>

Google maps

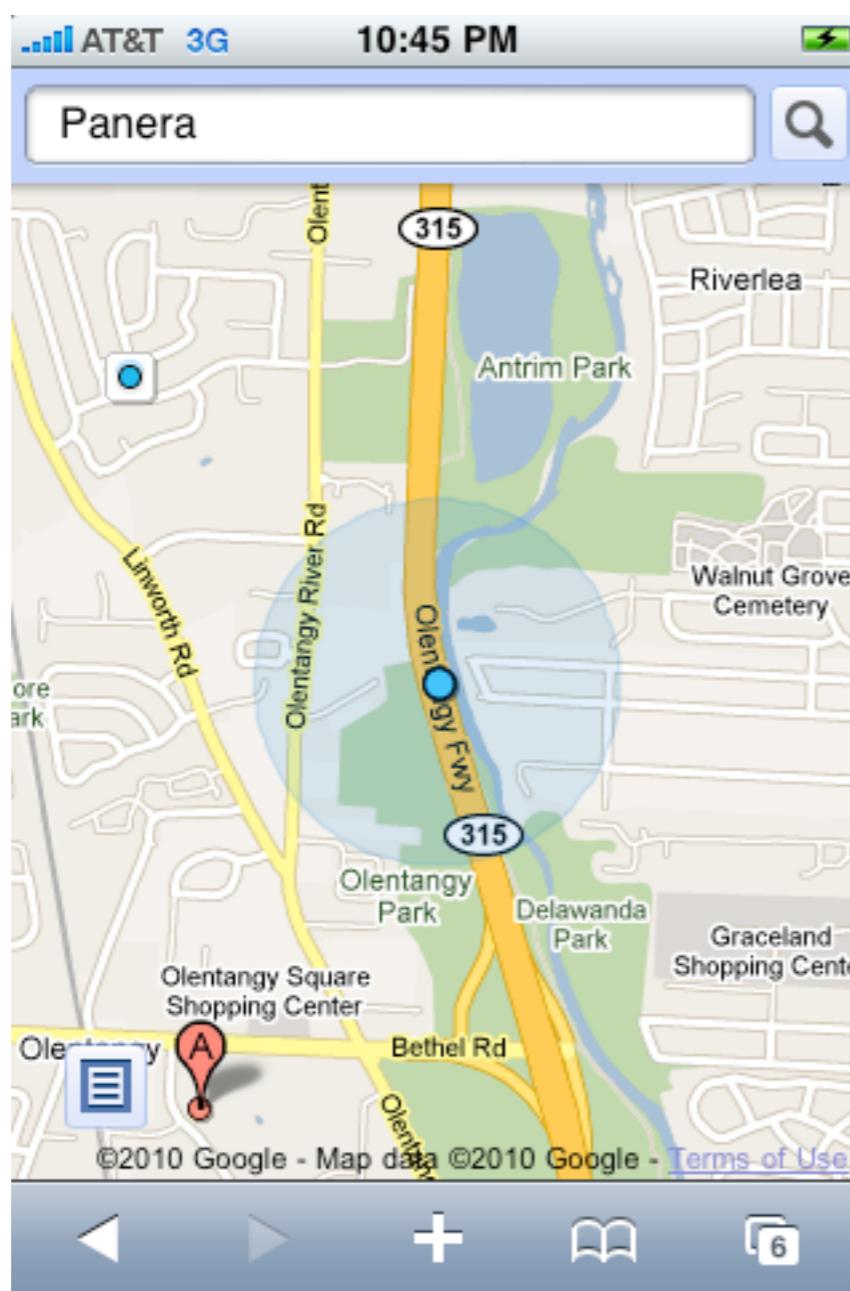

A screenshot of a Google Maps search result for "Panera" on an AT&T 3G mobile device at 10:46 PM. The result for "Panera Bread: Northwest" is displayed, showing a 5-star rating from 10 reviews. The address is 875 Bethel Road, Columbus, OH 43214-1903, with phone number (614) 457-6800 and website panerabread.com. A small image of a sandwich is shown. Below the listing are links for "Directions", "Search nearby", "Save to...", and "more". The map below shows the location of the store at the intersection of Bethel Rd and Olentangy Rd, with a red marker and letter 'A' indicating its position. Other landmarks like Olentangy Square Shopping Center, Delawanda Park, and Graceland Shopping Center are visible.

ArcGIS Runtime SDK for iOS

Resource Center

Home Concepts Samples API Reference

What is ArcGIS Runtime SDK for iOS?

The Runtime SDK for iOS allows you to add maps and spatial functionality to your custom iOS applications.

[Learn More... ▶](#)



Quick Links

Download & Install

- [Requirements & Installation](#)
- [Get the latest SDK \(v2.3\)](#)

Resources

- [Concepts](#)
- [Samples](#)
- [API Reference](#)
- [Esri Training Courses](#)

Support

- [Forums](#)
- [Esri Support](#)

Other links

- [ArcGIS for iOS Application](#)
- [ArcGIS Ideas](#)

Gallery

[More Gallery posts ▶](#)



Macau GeoGuide



Health Indicators



FindAControl for iOS



geoParole



경기도교통정보

<http://resources.arcgis.com/en/communities/runtime-ios-sdk/>

**Apache
Soir**



Apache Lucene - Apache Solr X

lucene.apache.org/solr/

rampart manifest aws altair imsafe soccer ecot.html RegExr Reflection.app - AirP » Other Bookmarks

Search with Apache select provider

Apache Solr

SOLR NEWS DOWNLOAD MAILING LISTS WIKI TUTORIAL ISSUE TRACKER LUCENE TLP

Ultra-fast Lucene-based Search Server

Apache Solr

Apache Solr offers Lucene's capabilities in an easy to use, fast search server with additional features like faceting, scalability and much more

Apache Solr

Solr is the popular, blazing fast open source enterprise search platform from the Apache Lucene project. Its major features include powerful full-text search, hit highlighting, faceted search, dynamic clustering, database integration, rich document (e.g., Word, PDF) handling, and geospatial search. Solr is highly scalable, providing distributed search and index replication, and it powers the search and navigation features of many of the world's largest internet sites.

Solr is written in Java and runs as a standalone full-text search server within a servlet container such as Tomcat. Solr uses the Lucene Java search library at its core for full-text indexing and search, and has REST-like HTTP/XML and JSON APIs that make it easy to use from virtually any programming language. Solr's powerful external configuration allows it to be tailored to almost any type of application without Java coding, and it has an extensive plugin architecture when more advanced customization is required.

See the complete feature list for more details.

DOWNLOAD

Apache Solr 3.6.1

DOWNLOAD

Apache Solr 4.0

Resources

Features

Tutorial

Release Documentation

Version Control

Books

Screenshots

<http://lucene.apache.org/solr/>

java -jar start.jar

Apache Solr

Dashboard

Instance

- Start less than a minute ago
- Host appserv.guest
- CWD /opt/tomcat/apache-tomcat-7.0.33
- Instance /opt/tomcat/apache-tomcat-7.0.33/solr/collection1
- Data /opt/tomcat/apache-tomcat-7.0.33/solr/collection1/...
- Index /opt/tomcat/apache-tomcat-7.0.33/solr/collection1/...

Versions

- solr-spec 4.0.0.2012.10.06.03.04.33
- solr-Impl 4.0.0 1394950 – rmuir – 2012-10-06 03:04:33
- lucene-spt&0.0
- lucene-impl.0.0 1394950 – rmuir – 2012-10-06 03:00:40

System 0.13 0.06 0.01

Physical Memory 92.5%
1.69 GB 1.83 GB

Swap Space 0.0%
0.00 MB 3.94 GB

File Descriptor Count 2.1%
84 4096

JVM

Runtime Java HotSpot(TM) 64-Bit Server VM (23.5-b02)

Processors 2

Args

- Djava.io.tmpdir=/opt/tomcat/current/temp
- Dcatalina.home=/opt/tomcat/current
- Dcatalina.base=/opt/tomcat/current
- Djava.endorsed.dirs=/opt/tomcat/current/endorsed
- Dcom.sun.management.jmxremote.authenticate=false
- Dcom.sun.management.jmxremote.ssl=false
- Dcom.sun.management.jmxremote.port=6969
- Dcom.sun.management.jmxremote
- Djava.util.logging.manager=org.apache.juli.ClassLo...
- Djava.util.logging.config.file=/opt/tomcat/current/co...

JVM-Memory 8.9%

37.02 MB 158.69 MB 417.81 MB

[Documentation](#) [Issue Tracker](#) [IRC Channel](#) [Community forum](#) [Solr Query Syntax](#)

<http://localhost:8983/solr/>

Apache Solr

Dashboard Logging Core Admin Java Properties Thread Dump collection1 Ping **Query** Schema Config Replication Analysis Schema Browser Plugins / Stats Dataimport

Request-Handler (qt)
/select

— common —

q
:

fq

sort

start, rows
0 10

fl

df

wt
xml

indent

debugQuery

dismax

edismax

hl

facet

spatial

spellcheck

Execute Query

http://localhost:8983/solr/collection1/select?q=%3A*&wt=xml

02xml*:*

Documentation Issue Tracker IRC Channel Community forum Solr Query Syntax

-Handler (qt)

http://localhost:8983/solr/collection1/select?q=*&wt=xml

02xml*::*

on

VS

http://localhost:8983/solr/collection1/select?q=*&wt=xml

search for everything

```
<?xml version="1.0" encoding="UTF-8"?>
<response>
<lst name="responseHeader"><int name="status">0</int><int
name="QTime">2</int><lst name="params"><str name="wt">xml</str><str
name="q">*&*</str></lst></lst><result name="response" numFound="0"
start="0"></result>
</response>
```

http://localhost:8983/solr/collection1/select?q=*:*&wt=xml&indent=on

```
<?xml version="1.0" encoding="UTF-8"?>
<response>

<lst name="responseHeader">
  <int name="status">0</int>
  <int name="QTime">1</int>
  <lst name="params">
    <str name="indent">on</str>
    <str name="wt">xml</str>
    <str name="q">*:*</str>
  </lst>
</lst>
<result name="response" numFound="0" start="0">
</result>
</response>
```

pretty print



http://localhost:8983/solr/collection1/select?q=*:*&wt=json&indent=on

{

 "responseHeader":{
 "status":0,
 "QTime":0,
 "params":{
 "indent":"on",
 "wt":"json",
 "q":"*:*"}},

 "response":{ "numFound":0,"start":0,"docs":[]
}}

↑
json

POiplaza | Amusement & Theme Parks

poiplaza.com/index.php?p=sdb&d=40&lstpg=ds&lstst=_LSTS_

rampart manifest aws altair imsafe soccer ecot.html RegExr Reflection.app - Airci Other Bookmarks

POI plaza NAVIGARE NECESSA EST

Upload Download

Home Services Applications Faq Contact

Hungary United Kingdom

Login Registration RSS

Amusement & Theme Parks (123)

Country: United States of America
Category: Fun & Pleasure
Service: Amusement & Theme Parks
Updated: 2008-04-03, 01:41:38
Downloads: 2248
Link: <http://www.themeparkcity.o>
Uploaded by: sLiPpErYwet

Share f t e Like

Useful info:
Amusement park is the generic term for a collection of rides and other entertainment attractions assembled for the purpose of entertaining a large group of people. An amusement park is more elaborate than a simple city park or playground, usually providing attractions meant to cater to adults, teenagers, and small children. A theme park is a type of amusement park which has been built around one or more themes, such as an American West theme, or Atlantis. Today, the terms amusement parks and theme parks are often used interchangeably.

Map Download Database error report

Florida Residents Save Over \$30 On Select Multi-Day Tickets When You Buy Online

RESTRICTIONS AND FEES APPLY

FIND OUT MORE

Adventure Dome Theme Park USA-Las Vegas, 2880 Las Vegas Blvd., +1 877-224-7267

Adventureland USA-Altoona, 5091 NE 56th Street

AdventureLand USA-New York, 2245 Route 110 Farmingdale, +1 631-694-6868

Amazing Chicago USA-Chicago, 401 East Illinois Street Suite 425

Animal Kingdom Zoo USA-Bordentown, 1800 Jacksonville Rd., +1 (609) 267-3111

Blue Bayou USA-Baton Rouge, 18142 Perkins Road, +1 225-753-2222

World Map

USA United States of America

Use .NET on iPhone and Android

C#

Use Xamarin

+1

New POI collections

- Update - Hungary CIB (277)
- Update - Germany Lidl (1627)
- Update - Lebanon Fix Speedcam (12)
- Update - Hungary Free Time - Fishing (386)
- Update - Hungary Free Time (706)
- Update - Hungary Free Time - Water sport (123)
- Update - Hungary Eating Out (4809)
- Update - Hungary Free Time - Horse Riding (398)
- Update - Hungary Accommodation (3786)
- Update - Hungary Event (283)
- Update - Hungary Free Time - Hunting (190)
- Update - South Africa Mobile Speedcams (1584)

```
curl http://localhost:8983/solr/update/json --data-binary @fileName  
-H 'Content-type:application/json'
```

```
[  
 {  
   "id": "Myrtle Waves Water Park",  
   "name": "Myrtle Waves Water Park",  
   "description": "USA-North Myrtle Beach<br />\nUS 17 Bypass at 10th Avenue<br />\n",  
   "coordinates_p": "33.81673,-78.68005",  
   "store": "33.81673,-78.68005",  
   "source_s": "USA-Amusement & Theme Parks"  
,  
 {  
   "id": "Coney Island",  
   "name": "Coney Island",  
   "description": "USA-New York-Brooklyn<br />\n1208 Surf Ave.<br />\n+1 718-372-5159",  
   "coordinates_p": "40.57546,-73.98017",  
   "store": "40.57546,-73.98017",  
   "source_s": "USA-Amusement & Theme Parks"  
,  
 {  
   "id": "Six Flags Over Georgia",  
   "name": "Six Flags Over Georgia",  
   "description": "USA-Austell<br />\n7561 Six Flags Pkwy<br />\n+1 770-948-9290",  
   "coordinates_p": "33.77091,-84.55220",  
   "store": "33.77091,-84.55220",  
   "source_s": "USA-Amusement & Theme Parks"  
 }  
 ]
```

http://localhost:8983/solr/collection1/select?q=*&wt=json&indent=on&rows=3

```
{  
  "responseHeader":{  
    "status":0,  
    "QTime":1,  
    "params":{  
      "indent":"on",  
      "wt":"json",  
      "q":"*:*",  
      "rows":"3"}},  
  "response":{ "numFound":122, "start":0, "docs": [  
    {  
      "id": "Myrtle Waves Water Park",  
      "name": "Myrtle Waves Water Park",  
      "description": "USA-North Myrtle Beach<br />\nUS 17 Bypass at 10th Avenue<br />\n",  
      "coordinates_p": "33.81673,-78.68005",  
      "store": "33.81673,-78.68005",  
      "source_s": "USA-Amusement & Theme Parks",  
      "_version_": 1420098404195762176},  
    {  
      "id": "Coney Island",  
      "name": "Coney Island",  
      "description": "USA-New York-Brooklyn<br />\n1208 Surf Ave.<br />\n+1 718-372-5159",  
      "coordinates_p": "40.57546,-73.98017",  
      "store": "40.57546,-73.98017",  
      "source_s": "USA-Amusement & Theme Parks",  
      "_version_": 1420098404315299840},  
    {  
      "id": "Six Flags Over Georgia",  
      "name": "Six Flags Over Georgia",  
      "description": "USA-Austell<br />\n7561 Six Flags Pkwy<br />\n+1 770-948-9290",  
      "coordinates_p": "33.77091,-84.55220",  
      "store": "33.77091,-84.55220",  
      "source_s": "USA-Amusement & Theme Parks",  
      "_version_": 1420098404317396992} ]}  
}]
```

pagination



<http://localhost:8983/solr/collection1/select?q=name:waves&wt=json&indent=on&rows=3>



query field name for Wave

```
{  
  "responseHeader":{  
    "status":0,  
    "QTime":1,  
    "params":{  
      "indent":"on",  
      "wt":"json",  
      "q":"name:Waves",  
      "rows":"3"}},  
  "response":{ "numFound":1, "start":0, "docs": [  
    {  
      "id": "Myrtle Waves Water Park",  
      "name": "Myrtle Waves Water Park",  
      "description": "USA-North Myrtle Beach<br />\nUS 17 Bypass at 10th Avenue<br />\n",  
      "coordinates_p": "33.81673,-78.68005",  
      "store": "33.81673,-78.68005",  
      "source_s": "USA-Amusement & Theme Parks",  
      "_version_": 1420098404195762176} ]}  
}
```

Solritas

localhost:8983/solr/collection1/browse?q=&pt=37.7752%2C-122.4232&d=100&sfield=store&fq=%7B%21bbox%67... [Star](#) [Key](#) [Print](#)

rampart manifest aws altair imsafe soccer ecot.html RegExr Reflection.app - AirF Other Bookmarks Solr Admin

Apache Solr

Examples: [Simple](#) [Spatial](#) [Group By](#)

Find: [Submit](#) [Reset](#)

Boost by Price

Location Filter: Distance (KM):

> [{!bbox}](#)

Field Facets

Query Facets

Range Facets

Pivot Facets


Clusters

Run Solr with java -Dsolr.clustering.enabled=true -jar start.jar to see results

2 results found in 8 ms Page 1 of 1


Six Flags Marine World [More Like This](#)

Id: Six Flags Marine World
Price:
Features:
In Stock:


[Larger Map](#)

Great America [More Like This](#)

Id: Great America
Price:
Features:
In Stock:


[Larger Map](#)

2 results found. Page 1 of 1

Options: [enable debug](#) [enable annotation XML](#)
Generated by [VelocityResponseWriter](#)
Documentation: [Solr Home Page](#), [Solr Wiki](#)
Disclaimer: The locations displayed in this demonstration are purely fictional. It is more than likely that no store with the items listed actually exists at that location!

distance filters




- point distance
- bounding lat and long

point distance

/select?q=*:*&fq={!geofilt}&pt=37.7752,-122.4232&d=100&sfield=coordinates_p&wt=json

point distance filter

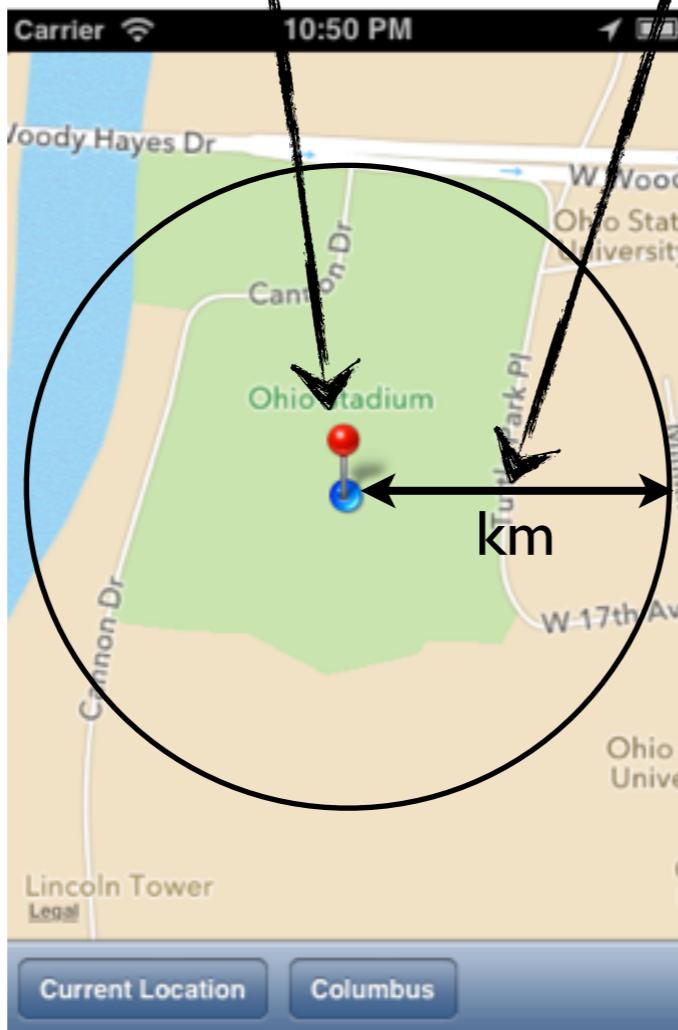


{

"id": "Myrtle Waves Water Park",
"name": "Myrtle Waves Water Park",
"description": "USA-North Myrtle Beach-",
"coordinates_p": "33.81673,-78.68005",
"store": "33.81673,-78.68005",
"source_s": "USA-Amusement & Theme Park"

}

bounding latitude and longitude

/select?q=*:*&fq={!bbox}&pt=37.7752,-122.4232&d=100&sfield=coordinates_p&wt=json

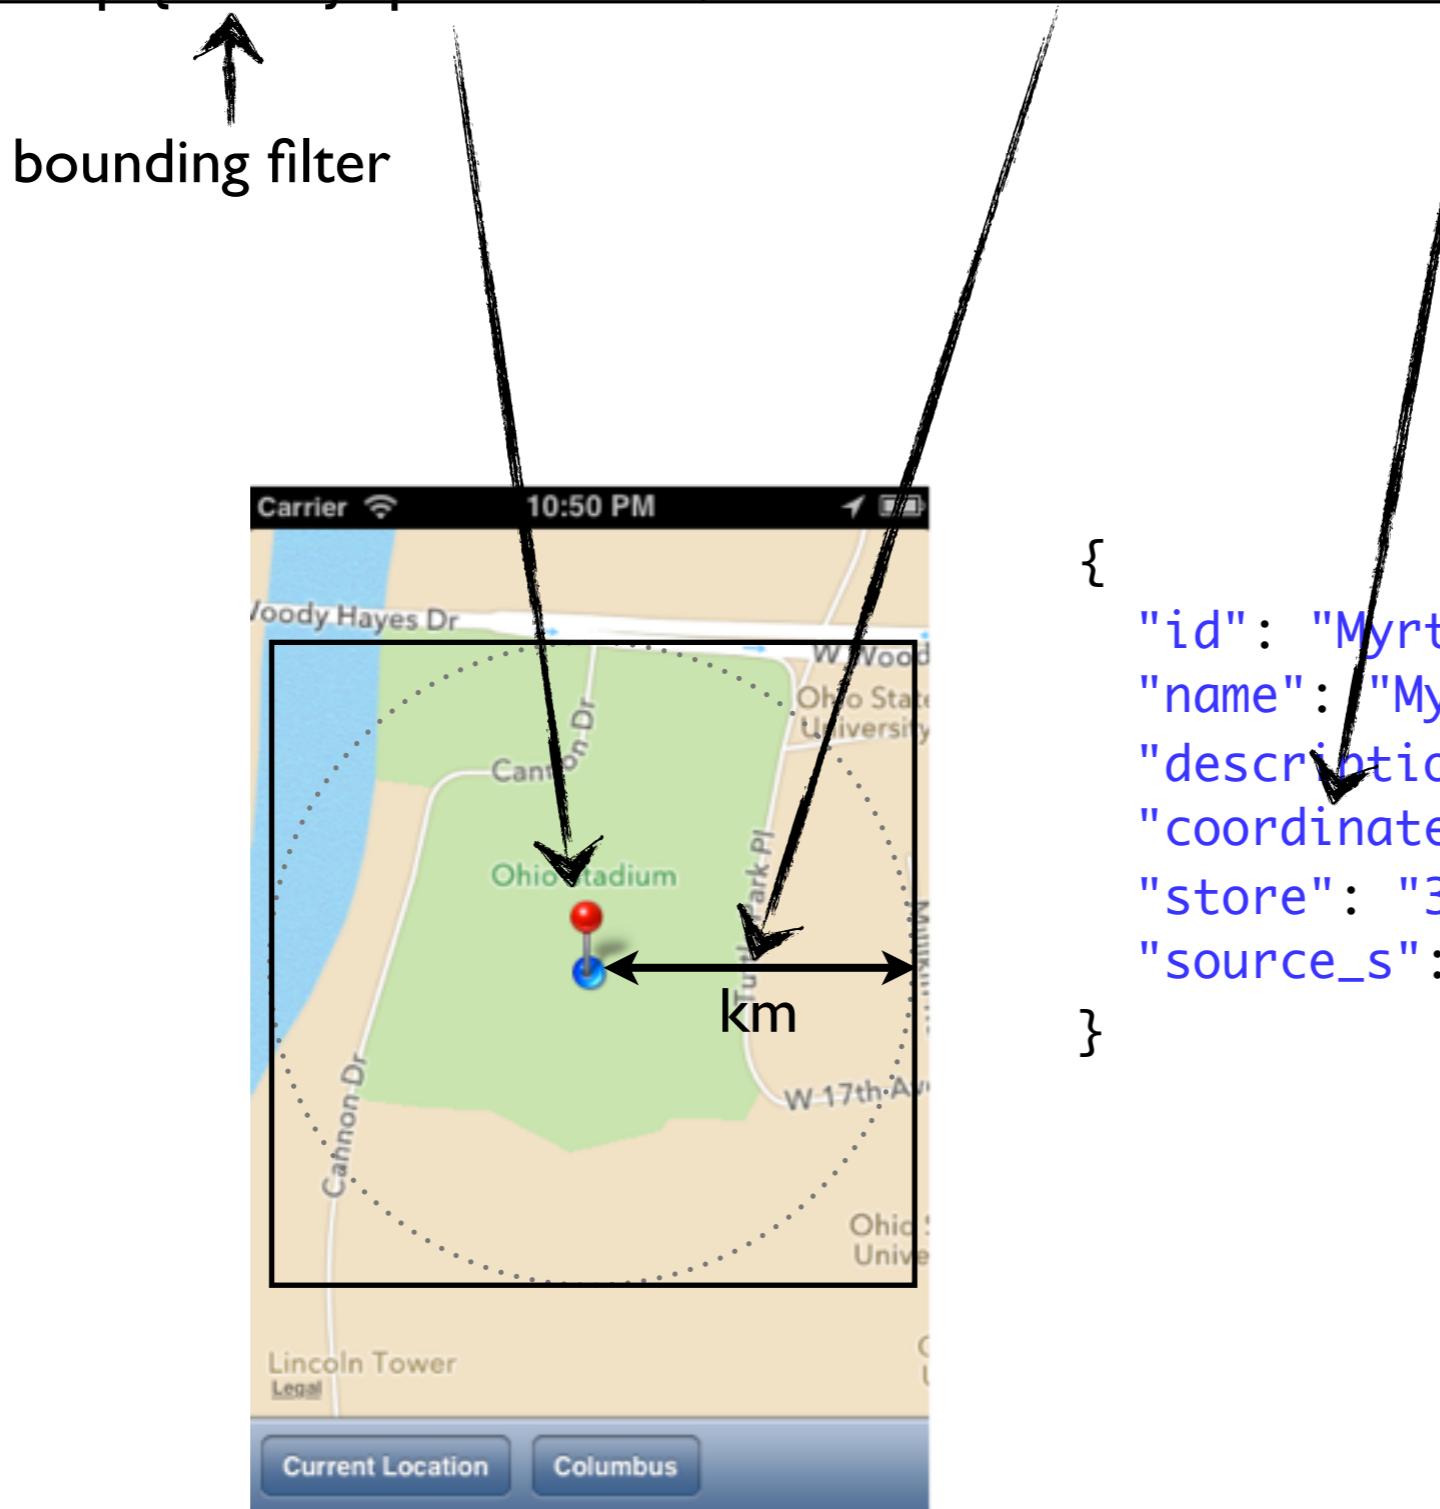

```
{  
  "id": "Myrtle Waves Water Park",  
  "name": "Myrtle Waves Water Park",  
  "description": "USA-North Myrtle Beach",  
  "coordinates_p": "33.81673,-78.68005",  
  "store": "33.81673,-78.68005",  
  "source_s": "USA-Amusement & Theme Park"
```

/select?q=*:*&fq={!bbox}
&pt=37.7752,-122.4232&d=100&sfield=coordinates_p&wt=json&fl=_dist_:geodist(),name,description,co
ordinates_p&indent=on

```
{  
  "responseHeader": {  
    "status": 0,  
    "QTime": 0,  
    "params": {  
      "d": "100",  
      "fl": "_dist_:geodist(),name,description,coordinates_p",  
      "indent": "on",  
      "q": "*:*",  
      "sfield": "coordinates_p",  
      "pt": "37.7752,-122.4232",  
      "wt": "json",  
      "fq": "{!bbox}"}},  
  "response": { "numFound": 2, "start": 0, "docs": [  
    {  
      "name": "Six Flags Marine World",  
      "description": "USA-Vallejo<br />\n2001 Marine World Parkway<br />\n+1 707-643-6722",  
      "coordinates_p": "38.14176,-122.24957",  
      "_dist_": 43.50948310887128},  
    {  
      "name": "Great America",  
      "description": "USA-Santa Clara<br />\n2401 Agnew Rd<br />\n",  
      "coordinates_p": "37.39057,-121.96905",  
      "_dist_": 58.57220580622602}]  
  ]}  
}
```

http://localhost:8983/solr/collection1/select?q=*&fq={!bbox}

&pt=37.7752,-122.4232&d=1000&sfield=coordinates_p&wt=json&fl=_dist_:geodist(),name,description,coordinates_p&indent=on&sort=geodist()&asc

↑
sort by distance

```
{  
  "responseHeader":{  
    "status":0,  
    "QTime":14,  
    "params":{"d":"1000", "fl":"_dist_:geodist(),name,description,coordinates_p", "sort":"geodist() asc",  
    "indent":"on", "q":"*:*", "sfield":"coordinates_p", "pt":"37.7752,-122.4232",  
    "wt":"json",  
    "fq":"{!bbox}"},  
  "response":{ "numFound":23, "start":0, "docs": [  
    {  
      "name": "Six Flags Marine World",  
      "description": "USA-Vallejo<br />\n2001 Marine World Parkway<br />\n+1 707-643-6722",  
      "coordinates_p": "38.14176,-122.24957",  
      "_dist_": 43.50948310887128},  
    {  
      "name": "Great America",  
      "description": "USA-Santa Clara<br />\n2401 Agnew Rd<br />\n",  
      "coordinates_p": "37.39057,-121.96905",  
      "_dist_": 58.57220580622602},  
    {  
      "name": "Universal Studios Hollywood",  
      "description": "USA-Universal City<br />\n100 Universal City Plaza<br />\n+1 800-959-9688",  
      "coordinates_p": "34.13673,-118.35590",  
      "_dist_": 545.5031109696113},  
    {  
      "name": "Santa Monica Pier",  
      "description": "USA-Santa Monica<br />\n200 Santa Monica Pier<br />\n+1 310-458-8900",  
      "coordinates_p": "34.01036,-118.49612",  
      "_dist_": 547.9619130243483},  
    {  
      "name": "Raging Waters",  
      "description": "USA-San Dimas<br />\n111 Raging Waters Drive<br />\n+1 909-802-2200",  
      "coordinates_p": "34.08565,-117.81186",  
      "_dist_": 583.5368017552456},  
    {  
      "name": "Knott's Berry Farm/Soak City",  
      "description": "USA-Buena Park<br />\n8039 Beach Blvd.<br />\n+1 714-220-5200",  
      "coordinates_p": "33.84550,-117.99810",  
      "_dist_": 591.5876572669723},  
    {  
      "name": "Disneyland",  
      "description": "USA-Anaheim<br />\n700 W Ball Rd<br />\n+1 714-781-4565",  
      "coordinates_p": "33.81786,-117.91846",  
      "_dist_": 592.74008770160221  
  ] } ] }
```



Community Experience Distilled


Apache Solr 3 Enterprise Search Server

Enhance your search with faceted navigation, result highlighting, relevancy ranked sorting, and more

David Smiley

Eric Pugh

[PACKT] open source*
PUBLISHING

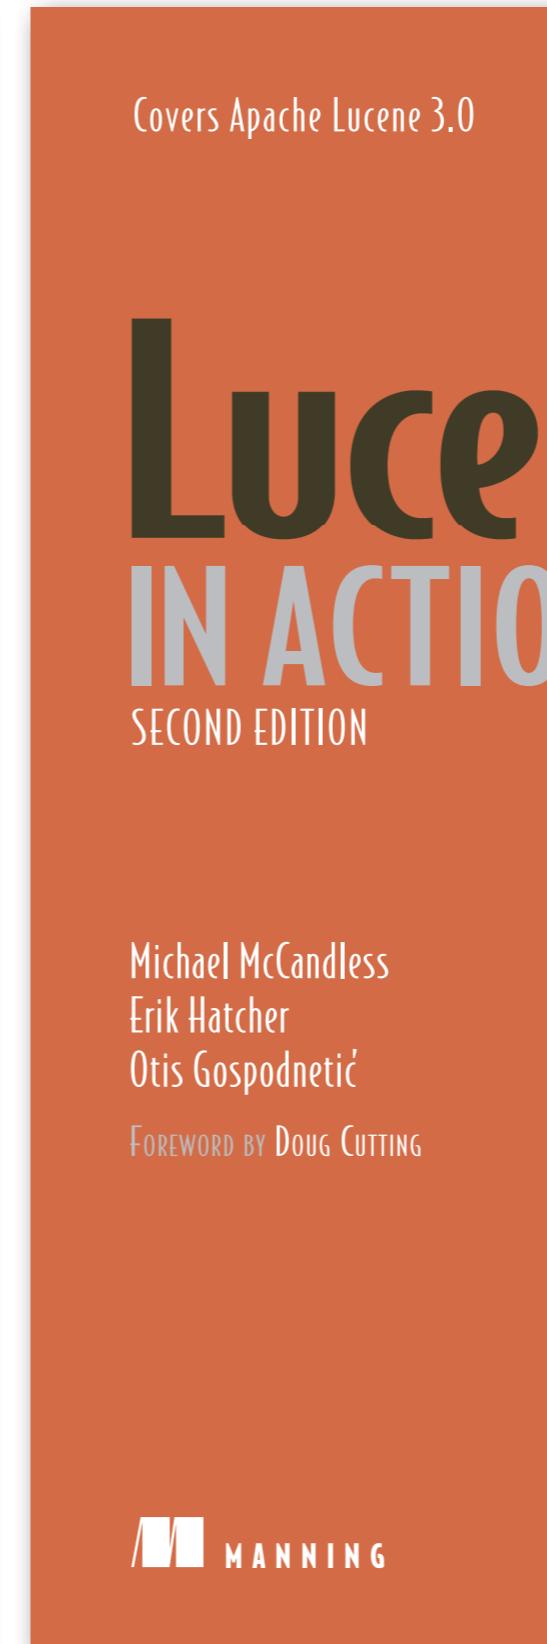

<http://wiki.apache.org/solr/SpatialSearch>

Columbus History Map Source





The screenshot shows the GitHub repository page for `cjudd/ColumbusHistoryMap_iOS`. The page includes the repository name, a search bar, and navigation links for Admin, Unwatch, Pull Request, and Issues. Below the header, there are tabs for Source, Commits, Network, Pull Requests (0), Fork Queue, Issues (0), Wiki (0), and Graphs, with the Branch set to master. A note about an example iOS application using MapKit is present, along with a 'Downloads' button. The commit history shows a recent change by `cjudd` where a specific user setting folder was removed. The file history table lists all files in the repository with their names, last modified times, and commit messages.


name	age	message	history
Classes/	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
ColumbusHistoryMap.xcodeproj/	about 22 hours ago	Removed specific user setting folder. [cjudd]	
ColumbusHistoryMap-Info.plist	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
ColumbusHistoryMapViewController.xib	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
ColumbusHistoryMap_Prefix.pch	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
MainWindow.xib	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
README	about 23 hours ago	initial commit [cjudd]	
history.png	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
libisimulate.a	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	
main.m	about 22 hours ago	Added orginal ColumbusHistoryMap code. [cjudd]	

https://github.com/cjudd/ColumbusHistoryMap_iOS



Christopher M. Judd
Judd Solutions
President/Consultant/Author
email: cjudd@juddsolutions.com
web: www.juddsolutions.com
blog: juddsolutions.blogspot.com
twitter: [javajudd](https://twitter.com/javajudd)

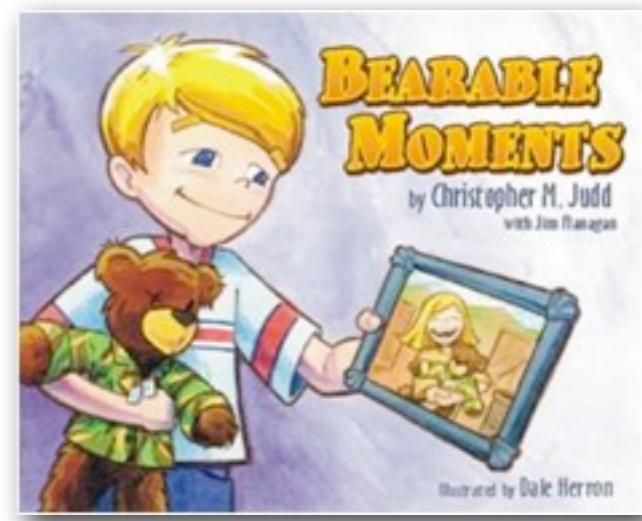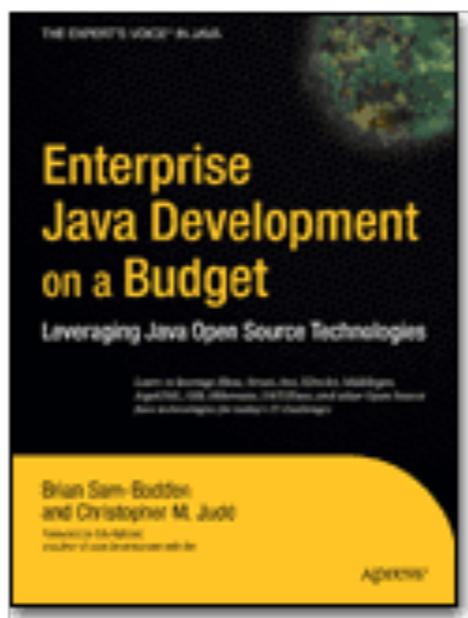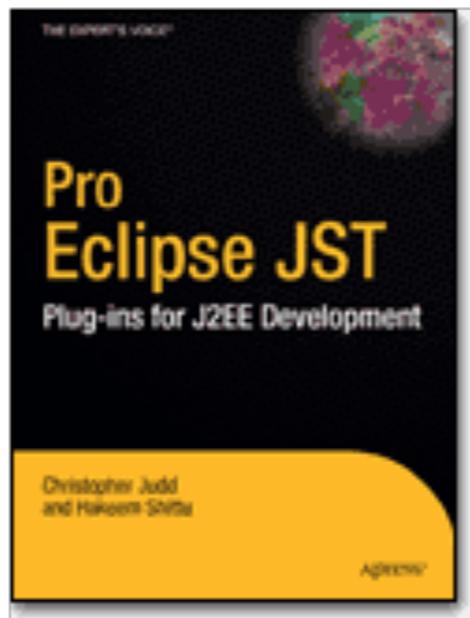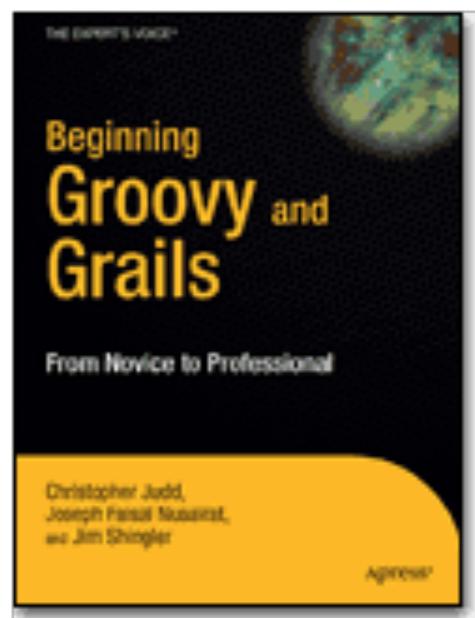

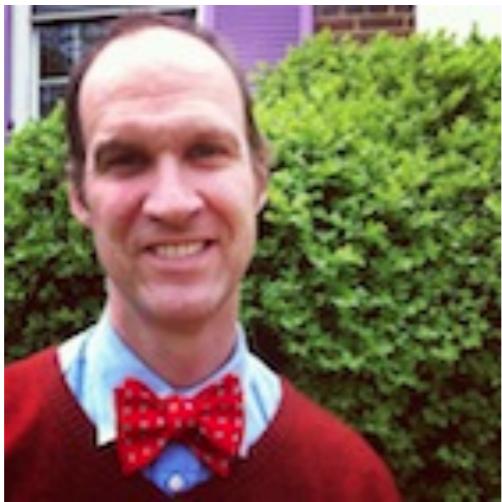

- [@walterpt](https://twitter.com/walterpt)
- walter@tyreeapps.com
- <http://www.tyreeapps.com>