

The background of the entire page is a photograph of a forest. In the foreground, a logger wearing an orange and black STIHL safety suit and helmet stands on a mossy forest floor, looking up at a massive tree trunk. The logger is holding a STIHL chainsaw. The forest is filled with tall, thin evergreen trees, and sunlight filters through the canopy, creating a dappled light effect on the ground and foliage.

STIHL

BAR AND CHAIN

TECHNICAL PRODUCT CATALOG | LAST UPDATED 2024

A NOTE FROM STIHL INCORPORATED

The Bar and Chain catalog is a technical product catalog that provides information regarding STIHL chainsaws, STIHL guide bars, STIHL saw chain, and more.

The information inside of this catalog was last updated in 2024 and is the most recent version available to the public.

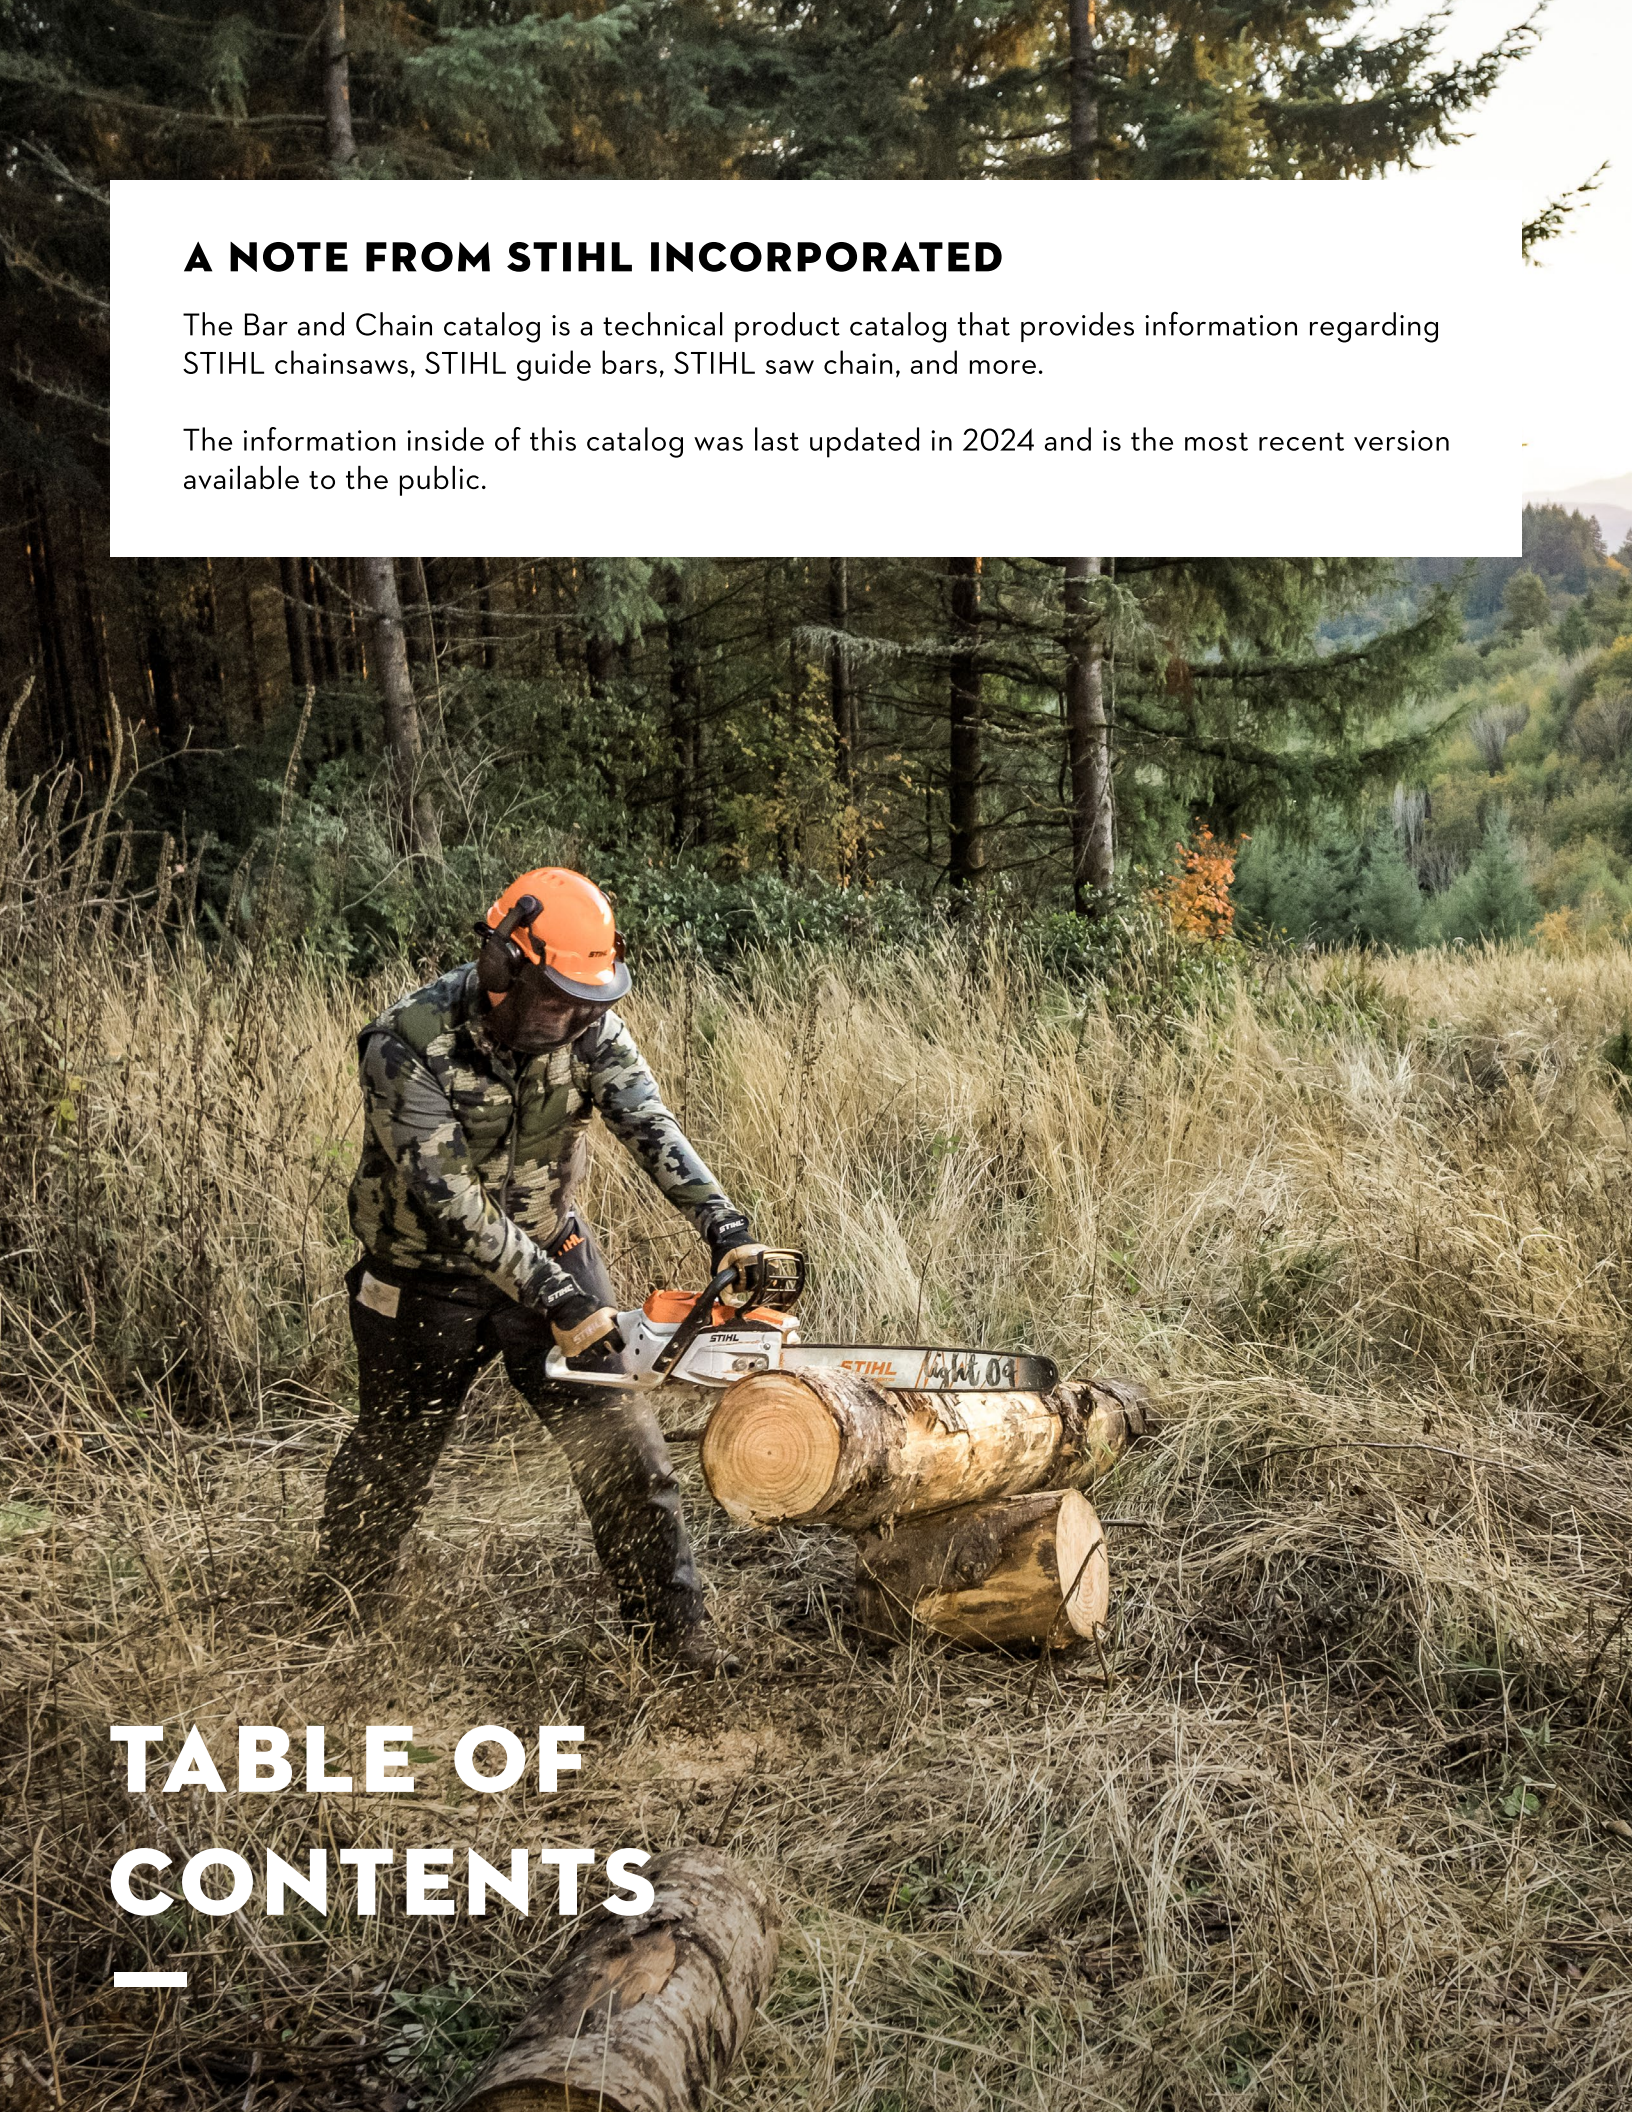
A person wearing a camouflage jacket, an orange helmet, and safety glasses is using a STIHL chainsaw to cut a large log in a forest. The log is lying on the ground, and the person is standing next to it. The background shows a dense forest with tall trees and some autumn-colored foliage. The text "STIHL light 09" is visible on the chainsaw's guide bar.

TABLE OF CONTENTS

1—ANSI INFORMATION

FROM PAGE 4

2—STIHL OILOMATIC® SAW CHAIN

FROM PAGE 18

3—GUIDE BARS

FROM PAGE 36

**4—GUIDE BAR & SAW CHAIN SELECTION GUIDE
FOR STIHL PRODUCTS**

FROM PAGE 44

**5—SAW CHAIN SELECTION GUIDE FOR COMPETITOR
BATTERY POWERED PRODUCTS**

FROM PAGE 238

**6—GUIDE BAR & SAW CHAIN SELECTION GUIDE
FOR COMPETITOR PRODUCTS**

FROM PAGE 242

7—ACCESSORIES

FROM PAGE 278

1[—] ANSI / OPEI B175.1-2012

FROM PAGE 5

2[—] HOW STIHL HELPS YOU COMPLY WITH THE STANDARD

FROM PAGE 6

**3[—] STIHL'S METHOD OF COMPLIANCE WITH
PERFORMANCE AND DESIGN REQUIREMENTS**

FROM PAGE 8

**4[—] STIHL'S WAY TO COMPLY WITH LABELING AND
INFORMATION REQUIREMENTS**

FROM PAGE 8

**5[—] WHAT THE STIHL DEALER HAS TO DO TO
COMPLY WITH THE STANDARD**

FROM PAGE 10

1.

ANSI/OPEI B175.1-2012

This section of the Bar and Chain Catalog is to inform you about the ANSI kickback standard, to assure you that STIHL offers products which comply with the performance, design, labeling and information requirements of the standard, and to demonstrate to you how we have made it easy for you to understand and to comply with the kickback standard.

ANSI is the abbreviation for the American National Standards Institute, OPEI is the abbreviation for the Outdoor Power Equipment Institute. OPEI is the standard development organization or secretariat for ANSI B175.1. The complete title for the current revision is ANSI/OPEI B175.1-2012. Throughout this catalog, ANSI/OPEI B175.1-2012 is referred to as ANSI B175.1.

Many people do not realize that the first ANSI standard for chain saws was developed in 1979 and that this new kickback requirement is simply an amendment to one section of the existing standard. Although the standard is voluntary in theory, **it must be considered as mandatory in practice**. If a dealer sells a non-complying product or fails to adequately warn the customer while purchasing noncomplying products, the dealer may increase the risk of kickback injury to his customer.

1.1

B175.1-2012 REQUIREMENTS

ANSI Performance and Design Requirements

Section 5.11 of ANSI standard B175.1-2012 sets certain performance and design criteria related to chain saw kickback. To comply with section 5.11 of ANSI B175.1-2012

- a. saws with a displacement of less than 3.8 cubic inches
 - must, in their original condition, meet a 45 degree computer derived kickback angle or the moving chain shall be stopped before the chain saw meets the 45 degree computed kickback angle
 - and must be equipped with at least two devices to reduce the risk of a kickback injury, such as a chain brake, low-kickback chain, reduced kickback bar, etc.
- b. saws with a displacement of 3.8 cubic inches and above
 - must be equipped with at least one device designed to reduce the risk of kickback injury, such as a chain brake, low-kickback chain, reduced kickback bar, etc.

The December 2011 edition of UL 60745-2-13 standard sets similar performance and design criteria for electric chain saws.

1.2

ANSI LABELING AND INFORMATION REQUIREMENTS

In addition to the performance and design requirements, the standard also includes detailed requirements for labeling powerheads and replacement chains. The standard requires that you, the dealer, give to the customer information on how to achieve compliance. It also directs that specific warnings be included in the Instruction Manual.

1.3


HOW STIHL HELPS YOU COMPLY WITH THE STANDARD

STIHL's Color Code System


STIHL has developed a color code system to help make it easy for you to:

- comply with the ANSI B175.1-2012 chain saw kickback standard
- know the difference between powerheads with a displacement of less than 3.8 cubic inches and powerheads with a displacement of 3.8 cubic inches and above
- identify the STIHL bars and STIHL chains with different kickback reduction characteristics.

This color code system uses the colors green and yellow.



Green marks the products ("green family") which are designed to reduce the risk of kickback injury and to comply with the ANSI B175.1 kickback standard. These products are recommended for both experienced and inexperienced chain saw users.



Products marked yellow indicate increased risk of kickback injury and are for use only by persons with extraordinary cutting needs and experience and specialized training for dealing with kickback.

The STIHL color code system includes powerheads, replacement chains and guide bars.

Powerheads:

- STIHL powerheads with a displacement of less than 3.8 cubic inches have a green marked warning label on the inside of the front hand guard.
- STIHL powerheads with a displacement of 3.8 cubic inches and above have a green and yellow marked warning label on the inside of the front hand guard.

Saw chains:

Saw chains are classified in the standard under two basic categories:

- a. low-kickback chain
- b. saw chain not meeting specific criteria

STIHL divides its chains into only two categories:

- low-kickback chains and
- chains other than low-kickback chain

Low-kickback chains:

- "Low-kickback chain" is a chain which has met the kickback performance requirements of § 5.11.2.4 of ANSI B175.1-2012 when tested on a specified sample of chain saws below 3.8 cubic inch displacement.

⚠ WARNING

There are potential powerhead and bar combinations with which low-kickback saw chains can be used which have not been specifically certified to comply with the 45° computer-derived kickback angle of § 5.11 of ANSI/OPEI B175.1-2012. Some low-kickback chains have not been tested with all powerhead and bar combinations.

1.3

STIHL low-kickback chains are marked with a green color code. All other chains are coded yellow. The chain loop boxes and the reel chain cores are color coded on the label. The chain loops incorporate a color-coded tie strap. Green color-coded STIHL chains are (as of January 2018) only the following:

- 71 PM3 for $\frac{1}{4}$ " extended pitch
- 61 PMM3, 63 PM3, 63 PS3, 63 PD3 for $\frac{3}{8}$ " extended pitch
- 23 RD3, 25 RD3, 26 RD3 for .325" pitch

- 33 RD3, 35 RD3, 36 RD3 for $\frac{3}{8}$ " pitch
- 23 RM3, 25 RM3, 26 RM3 for .325" pitch
- 33 RM3, 36 RM3, 33 RS3, 36 RS3 for $\frac{3}{8}$ " pitch
- 33 RH3, 36 RH3 for $\frac{3}{8}$ " pitch.

STIHL offers a variety of bars and chains. STIHL low-kickback chains are designed to reduce the risk of kickback injury. Other chains are designed to obtain higher cutting efficiency or sharpening ease but may result in higher kickback tendency.

Chains other than low-kickback chains

⚠ WARNING

This chain is capable of severe kickback which may cause serious or fatal injury. Only for users with extraordinary cutting needs and experience and specialized training for dealing with kickback. STIHL chains with reduced kickback potential are available. In order to comply with section § 5.11.2.1 of ANSI/OPEI Standard B175.1-2012, powerheads below 3.8 cubic inch must be equipped with green labeled STIHL low-kickback chain or other available complying low-kickback chain or other available complying low-kickback components. STIHL recommends its low-kickback (green labeled) chains for use on all powerheads.

⚠ WARNING

This chain should only be used with kickback reducing devices such as a properly functioning chain brake.

Guide bars:

STIHL reduced kickback bars are designed to reduce the risk of kickback injury when used with STIHL green labeled low-kickback chains. They are marked with a green color code. All other bars are coded yellow. This marking includes a color-coded warning

label on the wrapper of the bar and a colored dot on the bar itself near the bar mounting area. STIHL green labeled reduced kickback bars are designed to reduce the risk of injury when used with STIHL green labeled low-kickback chains.

⚠ WARNING

When used with other, more aggressive chains, green labeled reduced kickback bars may be less effective in reducing kickback.

⚠ WARNING

Do not mount a bow guide on any STIHL chain saw. Any chain saw equipped with a bow guide is potentially very dangerous. The risk of kickback is increased with a bow guide because of the increased kickback contact area. Low-kickback chains will not significantly reduce the risk of kickback injury when used on a bow guide.

1.4

STIHL'S METHOD OF COMPLIANCE WITH PERFORMANCE AND DESIGN REQUIREMENTS

1.4.1

CHAIN SAWS WITH A DISPLACEMENT OF LESS THAN 3.8 CUBIC INCHES

STIHL chain saw powerheads below 3.8 cubic inches are equipped with a STIHL Quickstop® chain brake and have a green marked warning label. STIHL offers and recommends green labeled reduced kickback bars and low-kickback chains for use on these powerheads.

Compliance with the ANSI requirements is achieved if STIHL chain saw powerheads below 3.8 cubic inch-

es are used together with the STIHL green labeled reduced kickback bars and low-kickback chains as listed in this catalog and in the "STIHL Bar and Chain Information" leaflet. Such compliance may also be achieved by use of other chains designated "low-kickback saw chain" or other replacement bar and chain combinations marked in accordance with the standard for use on the powerhead.

1.4.2

CHAIN SAWS WITH A DISPLACEMENT OF 3.8 CUBIC INCHES AND ABOVE

STIHL chain saw powerheads of 3.8 cubic inches and above are equipped with a STIHL Quickstop® chain brake and have a green and yellow marked warning label. These powerheads are only for users with extraordinary cutting needs and experience and specialized training for dealing with kickback. STIHL reduced kickback bars and STIHL low-kickback chains are offered and recommended for use on these powerheads.

Compliance with the ANSI performance and design requirements of § 5.11.2.2 is achieved through the STIHL Quickstop® chain brake alone.

The green mark on the warning label signifies that for these powerheads, STIHL also recommends that the customer use STIHL green labeled reduced kickback bars and low-kickback chains as listed in this catalog and in the "STIHL Bar and Chain Information" leaflet.

The yellow mark on the warning label on the powerhead shows that these units can be matched with yellow labeled bars and chains, when the user has extraordinary cutting needs, experience and specialized training for dealing with kickback.

1.5

STIHL'S WAY TO COMPLY WITH LABELING AND INFORMATION REQUIREMENTS

1.5.1

THE POWERHEADS

STIHL complies with the labeling requirements for powerheads as follows:

- Powerheads of less than 3.8 cubic inches (green marked labels)
- Powerheads of 3.8 cubic inches and above (green and yellow marked labels)

1.5.2

THE CHAINS

Labeling of Chains

Labeling of chains includes printed warnings on chain loop boxes with instructions on the back side, clam shells with instruction sheets inside, and labels on chain reel boxes and chain reel cores.

Chain Marking

With all reel boxes you will receive chain parts to produce your chain loops. The tie straps included will be color coded to support the color code system. When you receive reels of "low-kickback chain," the tie straps for making chain loops will be green colored. For all other chains the tie straps contained in the reel box for making chain loops will be yellow.



Green: Low-kickback chains

Yellow: Chains other than low-kickback chains

1.5.3

THE GUIDE BARS

The marking of the guide bars in their original condition includes a color marking on the bar and the label on the bar wrapper. STIHL green labeled reduced kickback bars are designed to reduce the risk of kickback injury when used with STIHL green labeled low-kickback chains.



Example of reduced kickback bar (green)



Examples of other STIHL bars (yellow)

1.6

STIHL'S INFORMATION AND INSTRUCTION SYSTEM ON ANSI B175.1-2012

- a. For easier identification, the Instruction Manual complying with ANSI B175.1-2012 will now have a colored warning (green or green/yellow) on the cover.
- b. A detailed **"STIHL Bar and Chain Information"** leaflet included in reel or loop boxes gives you the information and instructions for compliance with the standard.
- c. **"STIHL Dealer Instructions"** sheet enclosed in every reel box gives you detailed instructions on how to proceed with the packaging of chain loops. On the instruction sheet you receive a disclaimer form recommended for use whenever you sell a yellow coded chain to any customer for use on any STIHL or any other brand of chain saw.
- d. **"STIHL Bar and Chain Catalog with ANSI Information"** gives you a picture of the whole system and helps you to comply with the ANSI B175.1-2012 chain saw kickback standard.

1.7

WHAT THE STIHL DEALER HAS TO DO TO COMPLY WITH THE STANDARD

1.7.1

SALE OR RENTAL OF STIHL POWERHEADS

When selling or renting a STIHL chain saw powerhead:

- a. Make sure that the powerhead has the proper original label (see part 1.5.1) or replacement label (see part 1.9) and that the person purchasing or renting the saw has read and understood the label.
- b. Make sure that the appropriate Instruction Manual is given to a purchaser and that the appropriate Instruction Manual or Safety Manual is provided with each rental saw (see part 1.6).

1.7.2

LABELING AND SALE (OR RENTAL) OF STIHL CHAINS AND BARS

To ensure that saw chain sold in reels receives the proper warnings and instructions, STIHL will provide you with the following:

In every color-coded (green or yellow) reel box you will find a reel of chain and

- a sufficient number of color-coded (green or yellow) chain loop boxes
- the same number of **"STIHL Bar and Chain Information"** leaflets
- a sufficient number of colored (green or yellow) tie straps and
- one copy of the **"STIHL Dealer Instructions"** sheet.

Green color-coded STIHL chains are (as of January 2018) only the following:

- 71 PM3 for $\frac{1}{4}$ " extended pitch
- 61 PMM3, 61 PS3, 63 PM3, 63 PS3, 63 PD3 for $\frac{3}{8}$ " extended pitch
- 23 RD3, 25 RD3, 26 RD3 for .325" pitch
- 23 RS3, 33 RD3, 35 RD3, 36 RD3 for $\frac{3}{8}$ " pitch
- 23 RM3, 25 RM3, 26 RM3 for .325" pitch
- 33 RM3, 36 RM3, 33 RS3, 36 RS3 for $\frac{3}{8}$ " pitch
- 33 RH3, 36 RH3 for $\frac{3}{8}$ " pitch.

All other chains are color-coded yellow.

⚠ WARNING

Do not mix green chain reel boxes, green chain loop boxes and green tie straps with chain that has an increased risk of kickback (yellow labeled chain). If you do so, you will not comply with the standard and you will increase the risk of kickback injury to your customer.

In order to comply with ANSI B175.1-2012 chain saw kickback standard:

1. Put the chain loop into the appropriate green or yellow loop box.
2. Add to every loop of chain a **"STIHL Bar and Chain Information"** leaflet.
3. Clearly mark the top of the closed loop box with the chain type and length to show exactly what chain it contains.
4. To meet the computed kickback angle and reduced kickback device requirements of the ANSI standard (see part 1.1), sell (and rent) only green labeled reduced kickback bars and low-kickback chains for powerheads of less than 3.8 cubic inch displacement. Both green and yellow labeled chains should be used together with a properly functioning chain brake.

⚠ WARNING

If you install a chain on your customer's powerhead, it is important that you hand them the "STIHL Bar and Chain Information" leaflet and the appropriate warning on the chain box or clam shell. Instruct the customer to read and follow the contained information, instructions and warnings. Otherwise, your customer may not be sufficiently informed about the risk of kickback injury associated with saw chain.

⚠ WARNING

Use of other bar/chain combinations may increase kickback forces and the risk of kickback injury.

New bar/chain combinations may be developed after publication of this literature which will, in combination with certain powerheads, comply with 5.11.2 of ANSI B175.1-2012. Check the most recent "STIHL Bar and Chain Information" leaflet.

STIHL RECOMMENDS THAT YOU SELL GREEN LABELED REDUCED KICKBACK BARS AND LOW-KICKBACK CHAINS FOR ALL POWERHEADS.

IMPORTANT INFORMATION

The standard recognizes that there may be a limited group of users whose extraordinary needs may not be satisfied by bar and chain combinations that comply with the computed 45 degree acceptance criteria of the standard. These customers may require yellow labeled chains or bars.

If a customer insists on buying a non-complying cutting attachment for a powerhead of below 3.8 cubic inch displacement, it must be a conscious and informed choice by the customer. You must inform him of the fact that this combination does not comply with the standard and that complying combinations with a reduced risk of kickback injury are available for his powerhead.

1.8

OTHER BUSINESS PRACTICES THAT STIHL RECOMMENDS ALL SALES AND SERVICE DEALERS AND RENTAL DEALERS FOLLOW

It is the dealer's responsibility to advise the customer concerning chain saw safety and available safety equipment. You should adhere to the following business practices in marketing, servicing or renting STIHL products.

1.8.1

WHEN SELLING OR RENTING A SAW

When selling or renting a saw, you should provide the following services to your customer:

1. Properly assemble and adjust the saw.
2. Familiarize the customer with the Instruction Manual and the safety instructions and the warnings contained in it. Discuss kickback, push-back and pull-in with the customer. Describe the causes of these reactive forces and how to try to avoid them. Discuss the availability of reduced kickback bars and low-kickback chain and the advantages of these items with your customer.
3. Point out and discuss the safety features on the saw.
4. Demonstrate the correct way of starting the saw.
5. Demonstrate the proper cutting techniques.

1.8.2

ADDITIONAL RECOMMENDATIONS WHEN SELLING A NEW SAW

When you sell a new saw, you should provide the following services to your customer in addition to those listed in part 1.8.1:

1. Follow the ANSI kickback standard requirements mentioned throughout section 1 of this catalog when selling bars and chain.
2. Explain the limited warranty. Review and complete the Product Registration card and make sure the customer signs it and it is sent into STIHL or complete the eService electronic registration.

1.8.3

ADDITIONAL RECOMMENDATIONS WHEN SELLING A USED SAW

When you sell a used saw of any brand, you should perform the following services for your customer in addition to those listed in part 1.8.1:

1. Affix warning labels, if absent. STIHL warning labels are available at no charge from your STIHL distributor.
2. Follow the ANSI kickback standard requirements mentioned throughout section 1 of this brochure when selling powerheads, bars and chain.
3. Give the customer a STIHL Chain Saw Safety Manual (available at no charge).
4. Make pertinent comments on the condition of the saw and the warnings given on the bill of sale and have the customer sign it. Keep a copy for your records.

1.8.4

ADDITIONAL RECOMMENDATIONS WHEN RENTING A SAW

The STIHL rental dealers serve a specific market for which STIHL makes available the appropriate tools. When you rent a saw, you should provide the following services to your customer in addition to those listed in part 1.8.1:

1. STIHL recommends that you rent all your saws only with green labeled cutting attachments. These reduced kickback bars and low-kickback chains are recommended for all users and especially for inexperienced users.
2. Give the customer an Instruction Manual or Safety Manual with each rental. Safety Manuals are available from your STIHL distributor or STIHL Incorporated at no charge.
3. Ensure that all saws have the proper labeling. Affix warning labels, if absent. Note that warning labels are available from your STIHL distributor or STIHL Incorporated at no charge.
4. Ensure that the chain is sharpened properly. Failure to maintain a properly sharpened chain can result in increased risk of kickback injury.

1.9

RECOMMENDED BUSINESS PRACTICES WHEN REPAIRING ANY SAW

When you repair a saw of any brand, you should do the following

WARNING LABEL PART NO. 0000 967 3613

WARNING!

Improper use can cause serious or fatal injury. Read and follow all safety precautions in current Owner's or Safety Manual. This saw may be capable of severe kickback. To reduce risk of kickback injury use green labeled STIHL reduced kickback bar and low-kickback chain and Quickstop chain brake, if compatible. Avoid contact of bar tip with any object. This can cause the bar to kick suddenly up and back which may result in serious or fatal injury. Always use two hands to operate the saw.

0000 967 3613 XX

1. Affix warning labels, if absent. When replacing parts which should carry a warning sticker, such as a hand guard, make sure that the proper warning sticker is put on the new part. STIHL warning labels are available from your STIHL distributor.
 2. Advise the customer of any defects, such as a broken hand guard or nonfunctioning chain brake.
 3. Offer to give the customer a STIHL Chain Saw Safety Manual.
 4. Make pertinent comments on the condition of the saw and the warnings given on the bill of sale and have the customer sign it. Keep a copy for your records.
- If you need further information, please contact your STIHL distributor.

1.10

ADDITIONAL INFORMATION FOR LOGGING COMPANIES

It is important for logging companies to follow all safety precautions for chain saw use. STIHL recommends the use of its green labeled reduced kickback bars, green labeled low-kickback chains and STIHL Quickstop® chain braking system even for the logging companies' experienced chain saw users. It is important that logging companies follow the maintenance

and repair instructions in the relevant sections of the appropriate Instruction Manual, especially those in the chapters entitled "Guide Bar, Chain and Sprocket", "Sharpening and Maintenance of Saw Chain" and "Chain Brake." The throttle trigger lock-out, hand guard, chain brake and other safety features should **never** be removed or made inoperable.

1.11

KICKBACK AND DEVICES FOR REDUCING KICKBACK INJURY


⚠ WARNING

Because a chain saw is a high-speed wood-cutting tool, some special safety precautions must be observed as with any other power saw to reduce the risk of personal injury. Careless or improper use may cause serious or even fatal injury.



⚠ WARNING

Kickback may occur when the moving saw chain near the upper quadrant of the bar nose contacts a solid object or is pinched. When this occurs, the energy driving the saw chain can create a force that moves the chain saw in a direction opposite to the saw chain movement at the point where the saw chain is slowed or stopped. This may fling the bar up and back in a lightning fast reaction mainly in the plane of the bar and can cause severe or fatal injury to the operator. Kickback may occur, for example, when the saw chain near the upper quadrant of the bar nose contacts the wood or is pinched during limbing or when it is incorrectly used to begin a plunge or boring cut. The greater the force of the kickback reaction, the more difficult it becomes for the operator to control the chain saw. Many factors influence the occurrence and force of the kickback reaction. These include saw chain speed, the speed at which the bar and saw chain contact the object, the angle of contact, the condition of the saw chain and other factors.

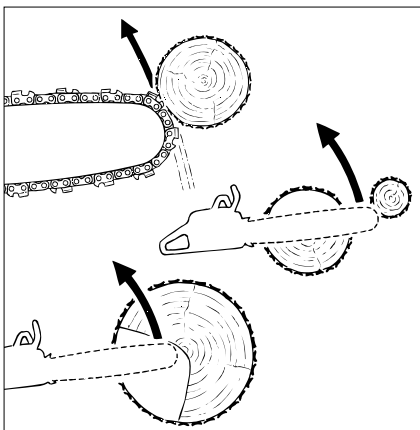

Devices for reducing the risk of kickback injury

STIHL recommends the use of the STIHL Quickstop® chain brake on the powerhead with green labeled reduced kickback bars and low-kickback chains.

STIHL Quickstop® Chain Brake

STIHL has developed a chain stopping system designed to reduce the risk of injury in certain kickback situations. It is called a STIHL Quickstop® chain brake.

When a kickback occurs, the guide bar may rotate around the front handle. If the cutting position is such that the operator's left hand is gripping the front handle behind the hand guard, and if the left hand ro-

tates around the front handle, contacts and pushes forward the front hand guard, which is the STIHL Quickstop® activating lever, this movement of the hand guard is designed to activate the STIHL Quickstop®. The chain brake on STIHL chain saws can also be activated by inertia. See the chapter entitled "Chain Brake" in the Instruction Manual.

STIHL Quickstop® Plus (Q) An Additional Braking Feature

STIHL has developed an additional braking feature called Q, which is available on certain models. As is true on other STIHL saws, the chain brake system on the Q models can be activated manually via the front hand guard or by inertia in certain kickback situations

in fractions of a second. It can also be activated with the throttle trigger lockout by removing the right hand completely from the rear handle - offering additional control in certain circumstances. This system is designed to stop the chain in less than one second.

⚠ WARNING

A chain saw should never be operated without a front hand guard. In a kickback situation this guard helps protect the left hand or other parts of the body. In addition, removal of the hand guard on a saw equipped with a chain brake will deactivate the chain brake.

⚠ WARNING

No STIHL Quickstop® or other chain brake device prevents kickback. These devices are designed to reduce the risk of kickback injury, if activated, in certain kickback situations. In order for the STIHL Quickstop® to reduce the risk of kickback injury, it must be properly maintained and in good working order. See the chapter entitled "Chain Brake" in the Instruction Manual. In addition, there must be enough distance between the bar and the operator to ensure that the STIHL Quickstop® has sufficient time to activate and stop the chain before potential contact with the operator.

⚠ WARNING

An improperly maintained chain brake may increase the time needed to stop the chain after activation, or may not activate at all.

1.11

Reduced kickback bar

STIHL green labeled reduced kickback bars are designed to reduce the risk of kickback injury when used with STIHL green labeled low-kickback chains.

⚠WARNING

STIHL green labeled reduced kickback bars are designed to reduce the risk of kickback injury when used with STIHL green labeled low-kickback chains.

Low-kickback chain

Some types of saw chain have specially designed components to reduce the force of nose contact kickback. STIHL has developed low-kickback chains for most STIHL powerheads.

⚠WARNING

A dull or improperly sharpened chain may reduce or negate the effects of the design features intended to reduce kickback energy. Improper lowering or shaping of the depth gauges or sharpening of the cutters may increase the chance and the potential energy of a kickback. The operator must always cut with a properly sharpened chain.

⚠WARNING

Reduced kickback bars and low-kickback chains do not prevent kickback, but they are designed to reduce the risk of kickback injury. They are available from STIHL dealers. A low-kickback chain will not significantly reduce the risk of kickback injury when used on a bow guide.

⚠WARNING

Even if a saw is equipped with a STIHL Quickstop® or STIHL Quickstop® Plus chain braking system, a reduced kickback bar and/or low-kickback chain, this does not eliminate the risk of injury by kickback. Therefore, the operator must always observe all safety precautions to avoid kickback situations.

To avoid kickback

The best defense against personal injury from kickback is to avoid kickback situations:

1. Hold the chain saw firmly with both hands and maintain a secure grip.
2. Be aware of the location of the guide bar nose at all times.
3. Never let the nose of the guide bar contact any object. Do not cut limbs with the nose of the guide bar. Be especially careful when cutting small, tough limbs, small size brush and saplings which may easily catch the chain.
4. Don't overreach.
5. Don't cut above shoulder height.
6. Begin cutting and continue at full throttle.
7. Cut only one log at a time.
8. Use extreme caution when re-entering a previous cut.
9. Do not attempt to plunge cut if you are not experienced with this cutting technique.
10. Be alert for shifting of the log or other forces that may cause the cut to close and pinch the chain.
11. Maintain saw chain properly. Cut with a correctly sharpened, properly tensioned chain at all times.
12. Stand to the side of the cutting path of the chain saw.

1 **STIHL OILOMATIC® PRINCIPLE**

FROM PAGE 19

2 **SAW CHAIN DESCRIPTION**

FROM PAGE 23

2 **SAW CHAIN TYPE OVERVIEW**

FROM PAGE 24

3 **SAW CHAIN TYPES**

FROM PAGE 26

4 **SAW CHAIN REPAIR PARTS LIST**

FROM PAGE 34

1.

You can be assured the same quality engineering and innovative technology that have made our chain saws famous goes into every component of long-life STIHL OIOMATIC® saw chain. STIHL produces saw chains


for all types of wood cutting and for most makes of chain saws. Every saw chain manufactured by STIHL incorporates the exclusive patented OIOMATIC® lubricating feature.

1.1


THE EMATIC™ BAR LUBRICATION SYSTEM

When used with STIHL OIOMATIC® saw chain, it will provide optimal lubrication, less wear and less oil consumption than conventional methods. Two ramps, strategically placed in the guide bar rail, help contain

the flow of oil and direct all lubrication to where it is needed. **The Ematic™ system can reduce bar oil consumption up to 50%.**

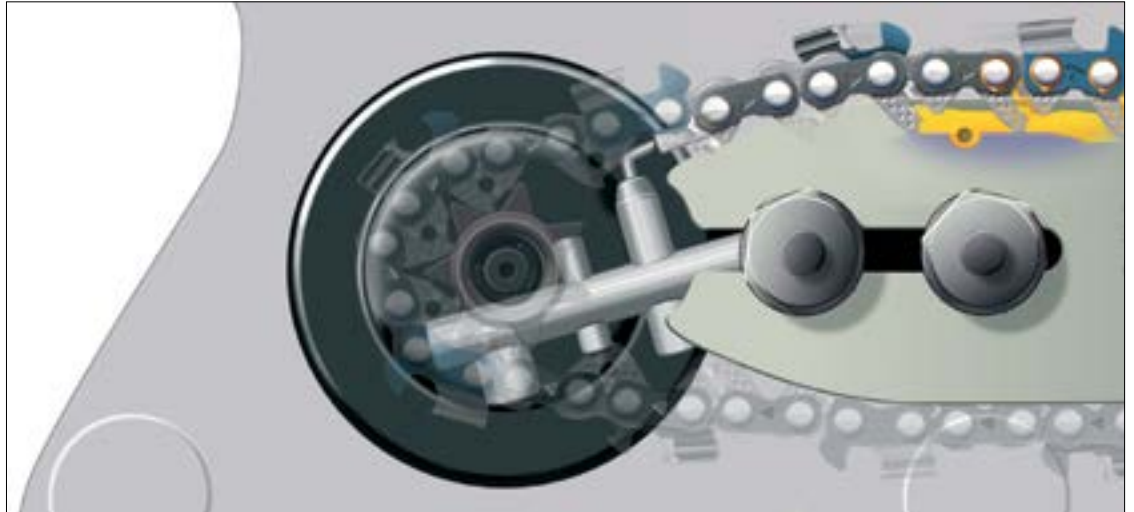

Example of Ematic™ Bar Lubrication System

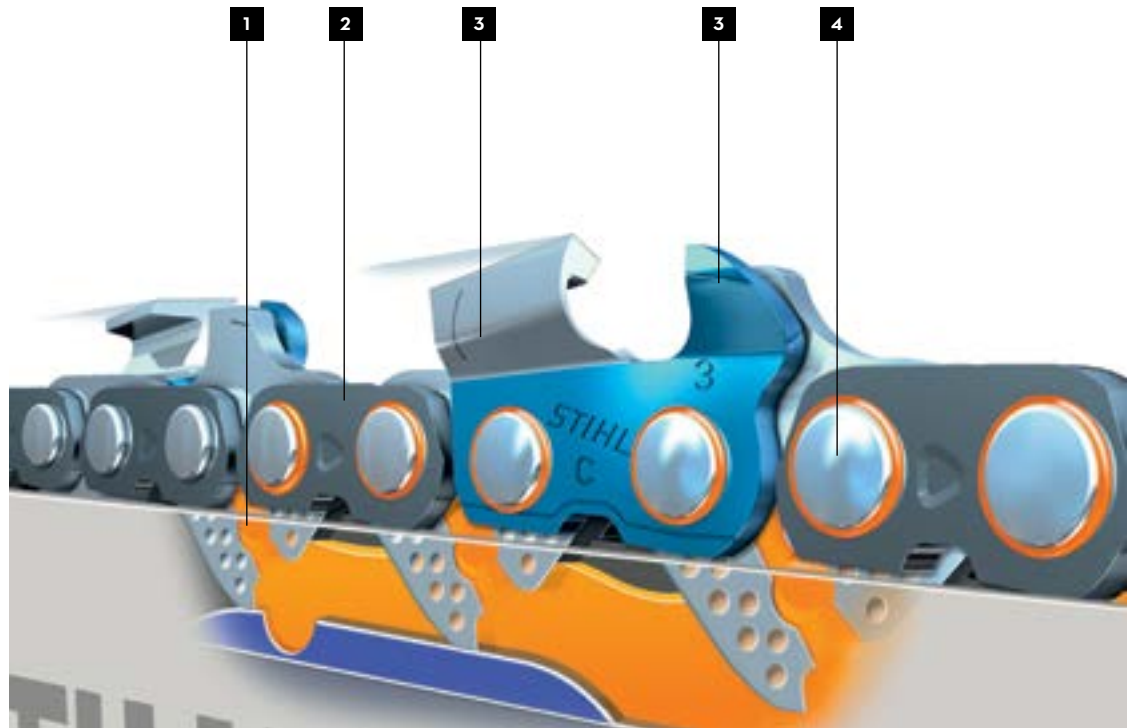

1 Chamfered Rivet Holes

- Special machining process ensures smooth rivet holes with no microscopic cracks
- Reduces friction and stretching

2 OILOMATIC® Drive Links

- OILOMATIC® channel funnels oil directly to rivets reducing friction and wear
- Reduces volume of bar oil needed

3 Chromed Cutters

- Sharpened before assembly
- Stay sharp longer with less filing
- Filing angle indicator mark on edpth gauge and top plate of the cutter tooth
- Wear indicators on cutters

Prestretched Chain

- Prestretched before leaving the factory
- Helps eliminate excessive chain stretching during break-in period
- Reduces maintenance time and component wear

4 Hardened Rivets

- Enable rivets to withstand high loads

1.2

DESIGN OF STIHL SAW CHAIN

STIHL saw chains are always assembled in the same basic pattern. The illustration shows the component parts of a "STIHL RAPID™" chain.

The important characteristics which define a chain are the chain pitch, the drive link gauge, drive link count and chain length. The pitch is the distance in inches between the centers of any three rivets divided by two. The result is the pitch in inches (Example: $\frac{3}{8}$ "). The pitch size in inches is stamped on each depth gauge.

The drive link gauge must match the width of the guide bar groove so that the chain fits the bar exactly. This measurement is quoted in inches or millimeters.

There are chains with drive link gauges of .043" (1.1 mm), .050" (1.3 mm), .058" (1.5 mm), .063" (1.6 mm) and .080" (2.0 mm) (for harvester chain only). The last digit of the measurement in millimeters is stamped on every drive link.

The chain length is quoted in terms of the numbers of drive links. The complete marketing numbers of STIHL saw chains give all the details regarding the chain pitch, drive link gauge and the number of drive links.

Standard tie strap

Green: Low-kickback chains

Standard tie strap

Yellow: Chains other than Low-kickback chain

Right hand cutter

For illustrative purposes this diagram contains both green and yellow tie-strap components.

Single-humped drive link

Preset tie strap

Standard tie strap

Left hand cutter

Drive link with channel

GREEN: Low-Kickback chains

YELLOW: Chains other than Low-Kickback chains

1.3

MAINTENANCE INSTRUCTIONS

When assembling the bar and chain, it is necessary to observe important but partially different procedures for each powerhead. Therefore, the instructions outlined in the Instruction Manual for the specific unit must be followed.

In order to increase the service life of the saw chain, sprocket and guide bar, two new chains should always be used in rotation with a new sprocket. Service life of the saw chain and guide bar depends on the quality of the lubricant. It is therefore essential to use a specially formulated chain lubricant.

A chain should be tensioned correctly and run without load at partial throttle for about 3 minutes to break it in. Ample lubrication is essential during this period. If the saw is equipped with an adjustable bar and chain oiler, the maximum flow should be set for the first hour of operation. Correct chain tension and lubrication are critical for both the cutting results and the service life of the cutting attachments. Chain lubrication must be checked before starting work. Chain tension should be visually checked with the engine switched off both before and during cutting and corrected as necessary.

Correct sharpening requires not only sharpening of the cutters, but also correct depth gauge settings. Filed back cutters lead to lower depth gauge settings, if not adjusted, low depth gauge settings (caused by filing only cutters and not depth gauges) may lead to lower cutting efficiency. Higher feeding force would be required which can cause operator fatigue and further wear on chain, guide bar, sprocket and anti-vibration system.

The guide bar should be turned over every time the chain is sharpened or changed. The guide bar groove and the oil inlet hole must be cleaned at regular intervals. The operator should never cut with a dull chain. The chain should always be sharpened as necessary according to instructions supplied in the Instruction Manual or the instructions supplied with the chain. Only STIHL sharpening aids should be used and the detailed sharpening instructions in the Instruction Manual or the instructions supplied with the sharpener must be followed.

The operator should always observe the safety precautions and warnings given in the Instruction Manual when operating the saw or sharpening the saw chain.


2.

SAW CHAIN DESCRIPTION

STIHL uses a Marketing Number System in addition to the part number. This allows easy identification of any chain. For example, chain with a Marketing Number of **61 PMM3**:

PITCH	GAUGE	CUTTER TYPE	CUTTER	SHAPE	SPECIAL
6	1	P	M	M	3
3/8" PICCO	.043"	STIHL PICCO™	MICRO™	MINI	SINGLE-HUMPED DRIVE LINK

PITCH
MARKED ON CUTTER



Pitch = $a / 2$

- 1** = 1/4"
- 2** = .325"
- 3** = 3/8"
- 4** = .404"
- 6** = 3/8" PICCO
- 7** = 1/4" PICCO

DRIVE LINK GAUGE
MARKED ON DRIVE LINK



- 1** = .043" (1.1 mm)
- 3** = .050" (1.3 mm)
- 5** = .058" (1.5 mm)
- 6** = .063" (1.6 mm)
- 0** = .080" (2.0 mm)

Number of drive links in Reels

Type	100 Ft. Reel
1/4", 1/4" PICCO	2400
.325"	1840
3/8"	1640
3/8" PICCO	1640
.404"	1480

R = STIHL RAPID™

P = STIHL PICCO™

S = Super (Full Chisel)

M = Micro™ (Semi Chisel)

D = Duro (Carbide Tip)

H = Hexa

3 = Single-Humped Drive Link

F = Full Skip

H = Semi Skip (Half-Skip) or Harvester
(i.e. on .404" RMH)

K = Klassic Cutter Design

L = Square Ground

M = Mini

R = Rescue (RDR chain, especially designed for
MS 460 R STIHL Rescue,
MS 461 R STIHL Rescue,
MS 462 R STIHL Rescue)

S = Special

X = Ripping chain

⚠WARNING

Recommended STIHL green-labeled low-kickback chains are not available in .404" pitch. For .404" chain, STIHL yellow-labeled chains are listed which have reduced kickback characteristics as compared to other STIHL yellow-labeled chains. Read and follow the yellow warning information included with these chains. STIHL recommends the use of 3/8" sprockets in combination with STIHL green-labeled low-kickback saw chains and STIHL green-labeled reduced kickback guide bars whenever possible.

⚠WARNING

Read and follow the yellow warning information included with the STIHL guide bar and STIHL saw chain types that fit onto the O88, MS 880, MS 881 powerhead.

SAW CHAIN TYPE OVERVIEW

TYPE	PITCH		1/4"	1/4" PICCO	.325"		
	GAUGE		.050"	.043"	.050"	.058"	.063"
	MARKETING NAME		13	71	23	25	26
STIHL RAPID™	Micro™	RM	3660		3693	3685	3686
		RMS	3661				
		RM3			3695	3688	3689
		RMF					
		RMX					
	Super	RS			3690	3638	3639
		RS3			3694		
		RSF					
		RSK					
		RSL					
		RSLH					
		RSLF					
	Hexa	RH					
		RH3					
		RHF					
	Micro™	RMH					
		RMHS					
	Duro	RD3			3696	3666	3667
		RDR					
STIHL PICCO™	Micro™	PM					
		PM3		3670			
		PMM3					
	Super	PS					
		PS3					
	Duro	PD3					

FROM MARKETING NAME TO ORDER NUMBER

SAW CHAIN ORDER NUMBER:

005
 Type number of saw chain Drive link count of saw chain

HOW TO FIND THE TYPE NUMBER:

The type number of each saw chain type can be found in the type number overview in this catalog.

Examples:

MS 150 C **71 PM3 64** → **3670** 005 **0064**
 Marketing Name Order Number
 MS 661 C **33 RS3 105** → **3624** 005 **0105**
 Marketing Name Order Number

3/8"			3/8" PICCO		.404"			
.050"	.058"	.063"	.043"	.050"	.050"	.058"	.063"	.080"
33	35	36	61	63	43	45	46	40
3650	3651	3652					3668	
3662		3664						
3691		3653					3838	
3623	3622	3621					3946	
3624		3626						
3676								
3874								
3679			3680					
3674			3675					
3672			3673				3851	
3133		3132						
3135		3134						
3137		3136						
								3996
								3620
3681	3682	3683						
		3944						
				3613				
				3636				
			3610					
				3617				
			3699	3616				
				3612				

Saw chains highlighted with green color are low-kickback chains.

3.

SAW CHAIN TYPES



This symbol indicates that the chain is a low-kickback chain. STIHL recommends the use of a green-labeled low-kickback chain.



WARNING: This symbol indicates that the product has increased risk of kickback injury and is for use only by persons with extraordinary cutting needs and experience and specialized training for dealing with kickback. Saw chains with reduced kickback potential are available.

How to read this chart

STIHL saw chains are available in a variety of pitches and gauges. Use the charts to identify the correct first four digits of the chain part number of the chain.

PITCH	
Gauge	Part #

3.1

STIHL PICCO™ SAW CHAINS

OILOMATIC® STIHL PICCO™ MICRO™ 3 (PM3)



Micro

OILOMATIC® STIHL PICCO™ Micro™ 3 chain replaces $\frac{3}{8}$ " PM1. It cuts faster and smoother. PM3 has a lower kickback tendency than $\frac{3}{8}$ " PM1.

STIHL PICCO™ Micro™ Mini 3 (PMM3)

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	-	3636	-
0.043"	-	3670	-	-	-	-
0.043"	-	-	-	-	3610	-

OILOMATIC® STIHL PICCO™ MICRO™ (PM)



Micro

STIHL PICCO™ Micro™ is a low vibration version of STIHL PICCO™ Micro™. This chain retains all the performance of STIHL PM, with the added benefit of lower vibration levels, for less operator fatigue.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	-	3613	-

OILOMATIC® STIHL PICCO™ SUPER 3 (PS3)



OILOMATIC® STIHL PICCO™ Super 3 is a low-kickback and low-vibration saw chain with improved cutting and boring efficiency with less feed force and has a 15 % longer cutting life when compared to the PM3 saw chain.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.043"	-	-	-	-	3699	-
0.050"	-	-	-	-	3616	-

OILOMATIC® STIHL PICCO™ SUPER (PS)



OILOMATIC® STIHL PICCO™ Super has improved cutting and boring efficiency, plus reduced vibration as compared to STIHL PICCO™ Micro™ saw chain.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	-	3617	-

OILOMATIC® STIHL PICCO™ DURO 3 (PD3)



OILOMATIC® STIHL PICCO™ Duro 3 is specifically designed for ten times longer cutting edge life, resulting in less frequent sharpening. Especially suited for cutting dirty wood, treated wood, roots and hardwoods. This chain must be resharpened with a formed diamond grinding wheel.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	-	3612	-



This symbol indicates that the chain is a low-kickback chain. STIHL recommends the use of a green-labeled low-kickback chain.



WARNING: This symbol indicates that the product has increased risk of kickback injury and is for use only by persons with extraordinary cutting needs and experience and specialized training for dealing with kickback. Saw chains with reduced kickback potential are available.

How to read this chart
STIHL saw chains are available in a variety of pitches and gauges. Use the charts to identify the correct first four digits of the chain part number of the chain.

PITCH	
Gauge	Part #

3.2

STIHL RAPID™ SAW CHAINS

OILOMATIC® STIHL RAPID™ MICRO™ 3 (RM3)



OILOMATIC® STIHL RAPID™ Micro™ 3 is the reduced-kickback tendency version of OILOMATIC® STIHL RAPID™ Micro™. RM3 retains performance features of the STIHL RM saw chain.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	3695	3662	-	-
0.058"	-	-	3688	-	-	-
0.063"	-	-	3689	3664	-	-

OILOMATIC® STIHL RAPID™ MICRO™ (RM)



OILOMATIC® STIHL RAPID™ Micro™ is a low-vibration saw chain. The lower vibration levels help reduce operator fatigue.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	3660	-	3693	3650	-	-
0.058"	-	-	3685	3651	-	-
0.063"	-	-	3686	3652	-	3668

OILOMATIC® STIHL RAPID™ MICRO™ SPECIAL (RMS) - CARVING CHAIN



Micro

The OILOMATIC® STIHL RAPID™ Micro™ Special Carving Chain has a special cutter shape that reduces cutting friction to a minimum, ensuring fast cutting speed with good efficiency in many types of wood. This chain is more forgiving in dirty conditions than full chisel (RS) chain types due to its cutter shape.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	3661	-	-	-	-	-

OILOMATIC® STIHL RAPID™ MICRO™ RIPPING CHAIN (RMX)



Micro

OILOMATIC® STIHL RAPID™ Micro™ (RMX) ripping saw chain is primarily for professional use in conjunction with small sawmills. This semi-chisel toothed saw chain is characterized by a low vibration level, high performance, smoother work surface after the cut, and 10-degree filing angle.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3691	-	-
0.063"	-	-	-	3653	-	3838

OILOMATIC® STIHL RAPID™ MICRO™ FULL SKIP (RMF)



Micro

OILOMATIC® STIHL RAPID™ Micro™ Full Skip is the skip pattern version of the OILOMATIC® STIHL RAPID™ Micro™. There are two tie straps between every two cutting teeth, allowing better chip discharge and higher chain speed.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3654	-	-
0.063"	-	-	-	-	-	3671

OILOMATIC® STIHL RAPID™ SUPER 3 (RS3)



Super

OILOMATIC® STIHL RAPID™ Super 3 is a reduced-vibration and low-kickback tendency version of OILOMATIC® STIHL RAPID™ Super. RS3 is an aggressive full-chisel chain, but has a single-humped drive link to reduce kickback tendency and the new cutter and tie strap design reduces vibration levels when cutting.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	3694	3624	-	-
0.063"	-	-	-	3626	-	-

3.2



This symbol indicates that the chain is a low-kickback chain. STIHL recommends the use of a green-labeled low-kickback chain.



WARNING: This symbol indicates that the product has increased risk of kickback injury and is for use only by persons with extraordinary cutting needs and experience and specialized training for dealing with kickback. Saw chains with reduced kickback potential are available.

How to read this chart

STIHL saw chains are available in a variety of pitches and gauges. Use the charts to identify the correct first four digits of the chain part number of the chain.

PITCH	
Gauge	Part #

OILOMATIC® STIHL RAPID™ SUPER (RS)



Super

OILOMATIC® STIHL RAPID™ Super is a reduced-vibration saw chain. A cutter and tie strap design reduces vibration levels significantly while still utilizing the aggressive full-chisel cutter design.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	3690	3623	-	-
0.058"	-	-	3638	3622	-	-
0.063"	-	-	3639	3621	-	3946

OILOMATIC® STIHL RAPID™ SUPER FULL SKIP (RSF)



Super

OILOMATIC® STIHL RAPID™ Super Full Skip is the skip pattern version of the OILOMATIC® STIHL RAPID™ Super. There are two tie straps between every two cutting teeth, allowing better chip discharge and higher chain speed.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3676	-	-

OILOMATIC® STIHL RAPID™ SUPER KLASSIC (RSK)



Super

OILOMATIC® STIHL RAPID™ Super Klassic has a special cutter geometry providing excellent control characteristics and very good chip flow, which helps enhance cutting efficiency.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3874	-	-
0.063"	-	-	-	3898	-	-

OILOMATIC® STIHL RAPID™ SUPER L (RSL)



Super

The Super L is a variation of the STIHL RAPID™ Super full chisel chain for special professional applications. It differs from the “normal” STIHL RAPID™ Super in the way the cutter is ground. The cutter on this chain is square ground and has an “L” shape, hence the name Super “L.” Use special square ground files or triangular chisel bit files to sharpen this chain.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3679	-	-
0.063"	-	-	-	3680	-	-

OILOMATIC® STIHL RAPID™ SUPER L HALF SKIP (RSLH)



Super

STIHL RAPID™ Super L Half Skip is the semi-skip pattern version of STIHL RAPID™ Super (RSL). STIHL RAPID™ Super L Half Skip alternates cutter spacing to create a chain with cutting characteristics and maintenance frequency between Full Skip (RSLF) and regular pattern (RSL).

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3674	-	-
0.063"	-	-	-	3675	-	-

OILOMATIC® STIHL RAPID™ HEXA (RH)



Hexa

STIHL RAPID™ HEXA saw chain features a brand new high-performance full-chisel cutter design that cuts up to 10% faster, stays sharper for longer, and is easier and faster to sharpen with a hand file. This saw chain features an exclusive, patented, STIHL cutter design. This saw chain requires a 6-sided, hexagon-shaped HEXA file or HEXA-shaped grinding wheel for the STIHL USG. Both are designed specifically to maintain the high-performance HEXA cutter shape.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3133	-	-
0.063"	-	-	-	3132	-	-

OILOMATIC® STIHL RAPID™ HEXA (RH3)



Hexa

The RH3 is the reduced-kickback tendency version of the RH saw chain.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3135	-	-
0.063"	-	-	-	3134	-	-

3.2

OIOMATIC® STIHL RAPID™ HEXA FULL SKIP (RHF)



Hexa

RHF is the full skip pattern version of RH. There are two tie straps between every two cutting teeth, allowing for better chip discharge and higher chain speed.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3137	-	-
0.063"	-	-	-	3136	-	-



This symbol indicates that the chain is a low-kickback chain. STIHL recommends the use of a green-labeled low-kickback chain.



WARNING: This symbol indicates that the product has increased risk of kickback injury and is for use only by persons with extraordinary cutting needs and experience and specialized training for dealing with kickback. Saw chains with reduced kickback potential are available.

STIHL saw chains are available in a variety of pitches and gauges. Use the charts to identify the correct first four digits of the chain part number of the chain.

	PITCH
Gauge	Part #

OIOMATIC® STIHL RAPID™ SUPER L FULL SKIP (RSLF)



Super

OIOMATIC® STIHL RAPID™ Super L Full Skip is the skip pattern, square-ground chisel version of OIOMATIC® STIHL RAPID™ Super. There are two tie straps between every two cutting teeth, allowing better chip discharge and higher chain speed.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	-	3672	-	-
0.063"	-	-	-	3673	-	3851

OIOMATIC® STIHL RAPID™ DURO 3 (RD3)



Duro

The first STIHL carbide-tipped .325" saw chain stays sharp up to ten times longer than standard chains. In addition, the OIOMATIC® STIHL RAPID™ Duro 3 is a low-vibration chain with a reduced kickback tendency.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.050"	-	-	3696	3681	-	-
0.058"	-	-	3666	3682	-	-
0.063"	-	-	3667	3683	-	-

OILOMATIC® STIHL RAPID™ DURO RESCUE (RDR)



Duro

OILOMATIC® STIHL RAPID™ Duro Rescue is designed using the STIHL OILOMATIC® principle. RDR surpasses the durability of former RDS in rescue applications and has a higher efficiency when cutting wood. This chain is purpose-built for the demanding needs of fire and rescue specialists and is for use by specially trained emergency services personnel only. RDR is the recommended chain for use on the MS 462 RC-M Rescue saw.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.063"	-	-	-	3944	-	-

OILOMATIC® Saw Chain

OILOMATIC® STIHL RAPID™ MICRO™ HARVESTER (RMH)



Micro

OILOMATIC® STIHL RAPID™ Micro™ Harvester is a specially designed and reinforced version of .404" pitch saw chain. RMH is designed to withstand the stresses of mechanized tree harvesting. NOTE: Harvester chain is designed for use on hydraulic harvester heads only.

	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.080"	-	-	-	-	-	3996


OILOMATIC® STIHL RAPID™ MICRO™ HARVESTER SPECIAL (RMHS)



Micro

OILOMATIC® STIHL RAPID™ Micro™ Harvester Special is a significantly reinforced version of the RMH Harvester chain. RMHS is only available in 2.0 mm (.080") gauge. Like RMH chain, RMHS is designed for use on hydraulic harvester heads only. This chain is designed to last longer than competing chains to minimize expensive harvester downtime. An extremely durable harvester chain.




	1/4"	1/4" PICCO	.325"	3/8"	3/8" PICCO	.404"
0.080"	-	-	-	-	-	3620

CHAIN TYPE: MARKETING NUMBER	TYPE NUMBER	 TIE STRAP KIT	 LEFT HAND CUTTER KIT ¹⁾	 RIGHT HAND CUTTER KIT ²⁾	 DRIVE LINK KIT	SEE TI BULLETIN
71 PM3	3670	3670 660 6100 ³⁾	3669 007 1001	3669 007 1000	3669 662 1050	-
13 RM	3660	3660 660 6100 ³⁾	3660 007 1001	3660 007 1000	3660 662 1050	-
13 RMS	3661	3660 660 6100 ³⁾	3661 007 1001	3661 007 1000	3660 662 1050	-
61 PMM3	3610	3610 660 6100 ³⁾	3610 007 1001	3610 007 1000	3610 662 1050	31.2007
63 PM	3613	3997 660 6030 ⁴⁾	3636 007 1001	3636 007 1000	3997 662 1050	40.2008
63 PD3	3612	3636 660 6100 ⁴⁾	3612 007 1001	3612 007 1000	3997 662 1050	
61 PS3	3699	3610 660 6100	3698 007 1001	3698 007 1000	3610 662 1050	
63 PS	3617	3997 660 6030 ⁴⁾	3616 007 1001	3616 007 1000	3997 662 1050	-
63 PS3	3616	3636 660 6100 ⁴⁾	3616 007 1001	3616 007 1000	3997 662 1050	
63 PM3	3636	3636 660 6100 ⁴⁾	3636 007 1001	3636 007 1000	3997 662 1050	33.2006
33 RH	3133	3132 660 6100	3132 007 1001	3132 007 1000	3833 662 1050	-
36 RH	3132	3132 660 6100	3132 007 1001	3132 007 1000	3725 662 1050	-
33 RH3	3135	3134 660 6100	3132 007 1001	3132 007 1000	3833 662 1050	-
36 RH3	3134	3134 660 6100	3132 007 1001	3132 007 1000	3725 662 1050	-
33 RHF	3137	3132 660 6100	3132 007 1001	3132 007 1000	3833 662 1050	-
36 RHF	3136	3132 660 6100	3132 007 1001	3132 007 1000	3725 662 1050	-
23 RM	3627	3686 660 6100 ³⁾	3629 007 1001	3629 007 1000	3862 662 1050	58.2013
23 RM	3684	3686 660 6100 ³⁾	3686 007 1001	3686 007 1000	3862 662 1050	58.2013
25 RM	3629	3686 660 6100 ³⁾	3629 007 1001	3629 007 1000	3863 662 1050	58.2013
25 RM	3685	3686 660 6100 ³⁾	3686 007 1001	3686 007 1000	3863 662 1050	58.2013
26 RM	3629	3686 660 6100 ³⁾	3629 007 1001	3629 007 1000	3603 662 1050	58.2013
26 RM	3686	3686 660 6100 ³⁾	3686 007 1001	3686 007 1000	3603 662 1050	58.2013
23 RS	3690	3690 660 6100 ³⁾	3690 007 1001	3690 007 1000	3690 662 1050	-
23 RM	3693	3690 660 6100 ³⁾	3693 007 1001	3693 007 1000	3690 662 1050	-
23 RS3	3694	3694 660 6100 ⁴⁾	3690 007 1001	3690 007 1000	3690 662 1050	-
23 RM3	3695	3694 660 6100 ³⁾	3693 007 1001	3693 007 1000	3690 662 1050	-
23 RM3	3632	3689 660 6100 ³⁾	3629 007 1001	3629 007 1000	3862 662 1050	-
23 RM3	3687	3689 660 6100 ³⁾	3686 007 1001	3686 007 1000	3862 662 1050	-
25 RM3	3633	3689 660 6100 ³⁾	3629 007 1001	3629 007 1000	3863 662 1050	-
25 RM3	3688	3689 660 6100 ³⁾	3686 007 1001	3686 007 1000	3863 662 1050	-
26 RM3	3634	3689 660 6100 ³⁾	3629 007 1001	3629 007 1000	3603 662 1050	-
26 RM3	3689	3689 660 6100 ³⁾	3686 007 1001	3686 007 1000	3603 662 1050	-
23 RS	3637	3686 660 6100 ³⁾	3639 007 1001	3639 007 1000	3862 662 1050	43.2006
25 RS	3638	3686 660 6100 ³⁾	3639 007 1001	3639 007 1000	3863 662 1050	43.2006
26 RS	3639	3686 660 6100 ³⁾	3639 007 1001	3639 007 1000	3603 662 1050	43.2006
23 RD3	3665	3689 660 6100 ³⁾	3667 007 1001	3667 007 1000	3862 662 1050	-
23 RD3	3696	3694 660 6100 ³⁾	3696 007 1001	3696 007 1000	3690 662 1050	-
25 RD3	3666	3689 660 6100 ³⁾	3667 007 1001	3667 007 1000	3863 662 1050	-
26 RD3	3667	3689 660 6100 ³⁾	3667 007 1001	3667 007 1000	3603 662 1050	-
33 RD3	3681	3626 660 6100 ⁴⁾	3683 007 1001	3683 007 1000	3833 662 1050	-

$$\begin{aligned}
 1 &= 5 \times \text{[Tie Strap Kit Icon]} + 5 \times \text{[Left Hand Cutter Kit Icon]} \\
 2 &= 5 \times \text{[Tie Strap Kit Icon]} + 5 \times \text{[Left Hand Cutter Kit Icon]} \\
 3 &= 8 \times \text{[Left Hand Cutter Kit Icon]} + 8 \times \text{[Left Hand Cutter Kit Icon]}
 \end{aligned}$$

$$\begin{aligned}
 4 &= 9 \times \text{[Left Hand Cutter Kit Icon]} + 9 \times \text{[Left Hand Cutter Kit Icon]} \\
 5 &= 11 \times \text{[Left Hand Cutter Kit Icon]} + 11 \times \text{[Left Hand Cutter Kit Icon]} \\
 6 &= 12 \times \text{[Left Hand Cutter Kit Icon]} + 12 \times \text{[Left Hand Cutter Kit Icon]}
 \end{aligned}$$

$$\begin{aligned}
 7 &= 10 \times \text{[Drive Link Kit Icon]} \\
 8 &= 10 \times \text{[Drive Link Kit Icon]}
 \end{aligned}$$

CHAIN TYPE: MARKETING NUMBER	TYPE NUMBER	 TIE STRAP KIT	 LEFT HAND CUTTER KIT ¹⁾	 RIGHT HAND CUTTER KIT ²⁾	 DRIVE LINK KIT	SEE TI BULLETIN
35 RD3	3682	3626 660 6100 ⁴⁾	3683 007 1001	3683 007 1000	3844 662 1050	-
36 RD3	3683	3626 660 6100 ⁴⁾	3683 007 1001	3683 007 1000	3725 662 1050	-
33 RS3	3624	3626 660 6100 ⁴⁾	3621 007 1001	3621 007 1000	3833 662 1050	572004
36 RS3	3626	3626 660 6100	3621 007 1001	3621 007 1000	3725 662 1050	572004
33 RM	3650	3621 660 6100 ⁴⁾	3652 007 1001	3652 007 1000	3833 662 1050	-
35 RM	3651	3621 660 6100 ⁴⁾	3652 007 1001	3652 007 1000	3844 662 1050	-
36 RM	3652	3621 660 6100 ⁴⁾	3652 007 1001	3652 007 1000	3725 662 1050	-
33 RM3	3662	3626 660 6100 ⁴⁾	3652 007 1001	3652 007 1000	3833 662 1050	-
36 RM3	3664	3626 660 6100 ⁴⁾	3652 007 1001	3652 007 1000	3725 662 1050	-
33 RMF	3654	3621 660 6100 ⁴⁾	3621 007 1001	3621 007 1000	3833 662 1050	-
33 RS	3623	3621 660 6100 ⁴⁾	3621 007 1001	3621 007 1000	3833 662 1050	-
35 RS	3622	3621 660 6100 ⁴⁾	3621 007 1001	3621 007 1000	3844 662 1050	-
36 RS	3621	3621 660 6100 ⁴⁾	3621 007 1001	3621 007 1000	3725 662 1050	-
33 RSK	3874	3621 660 6100 ⁴⁾	3898 007 1001	3898 007 1000	3833 662 1050	-
33 RSL	3679	3621 660 6100 ⁴⁾	3673 007 1001	3673 007 1000	3833 662 1050	-
36 RSL	3680	3621 660 6100 ⁴⁾	3673 007 1001	3673 007 1000	3725 662 1050	-
33 RSLH	3674	3621 660 6100 ⁴⁾	3673 007 1001	3673 007 1000	3833 662 1050	-
36 RSLH	3675	3621 660 6100 ⁴⁾	3673 007 1001	3673 007 1000	3725 662 1050	-
33 RSLF	3672	3621 660 6100 ⁴⁾	3673 007 1001	3673 007 1000	3833 662 1050	-
36 RSLF	3673	3621 660 6100 ⁴⁾	3673 007 1001	3673 007 1000	3725 662 1050	-
46 RS	3946	3812 660 6100 ³⁾	3946 007 1001	3946 007 1000	3712 662 1050	-
46 RSLF	3851	3812 660 6100 ³⁾	3877 007 1001	3877 007 1000	3712 662 1050	-
33 RD	3948	3621 660 6100 ⁴⁾	3683 007 1001	3683 007 1000	3833 662 1050	-
36 RD	3943	3621 660 6100 ⁴⁾	3683 007 1001	3683 007 1000	3725 662 1050	-
36 RDR	3944	3621 660 6100 ⁴⁾	3944 007 1001	3944 007 1000	3725 662 1050	-
40 RMH	3996	3812 660 6100 ³⁾	3996 007 1001	3996 007 1000	3996 662 1050	-
40 RMHS	3620	3620 660 6000 ⁶⁾	3620 007 1001	3620 007 1000	3620 662 1050	-
33 RMX	3691	3621 660 6100 ⁴⁾	3653 007 1001	3653 007 1000	3833 662 1050	-
36 RMX	3653	3621 660 6100 ⁴⁾	3653 007 1001	3653 007 1000	3725 662 1050	-
46 RMX	3838	3812 660 6020 ⁸⁾	3838 007 1001	3838 007 1000	3712 662 1050	-

$$\begin{aligned}
 1 &= 5 \times \text{[Link 1]} + 5 \times \text{[Link 2]} \\
 2 &= 5 \times \text{[Link 1]} + 5 \times \text{[Link 2]} \\
 3 &= 8 \times \text{[Link 1]} + 8 \times \text{[Link 2]}
 \end{aligned}$$

$$\begin{aligned}
 4 &= 9 \times \text{[Link 1]} + 9 \times \text{[Link 2]} \\
 5 &= 11 \times \text{[Link 1]} + 11 \times \text{[Link 2]} \\
 6 &= 12 \times \text{[Link 1]} + 12 \times \text{[Link 2]}
 \end{aligned}$$

$$\begin{aligned}
 7 &= 10 \times \text{[Link 3]} \\
 8 &= 10 \times \text{[Link 3]}
 \end{aligned}$$

1st LASER MARKING IDENTIFICATION FORMAT ON STIHL GUIDE BARS

FROM PAGE 37

2nd STIHL GUIDE BAR VERSIONS

FROM PAGE 38

3rd BAR TAIL TEMPLATES

FROM PAGE 40

1.

NEW LASER MARKING IDENTIFICATION FORMAT ON STIHL GUIDE BARS

A: PREVIOUS IDENTIFICATION FORMAT

B: NEW IDENTIFICATION FORMAT (2012)

C: NEW IDENTIFICATION FORMAT (2015)




1 = STIHL part number e.g. 3003 000 9421

2 = Guide bar length e.g. 20 in. (50 cm)

3 = Groove width / drive link gauge e.g. .063" (1.6 mm)

4 = Number of drive links (STIHL ROLLOMATIC® only) e.g. 72

5 = Chain pitch (STIHL ROLLOMATIC® only) e.g. $\frac{3}{8}$ "

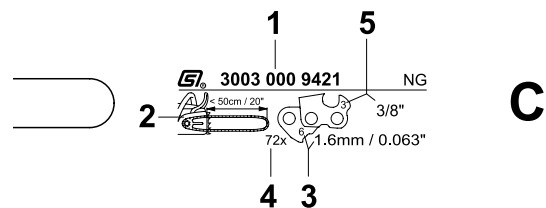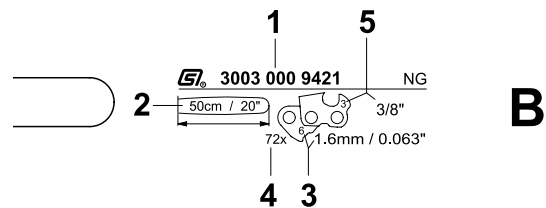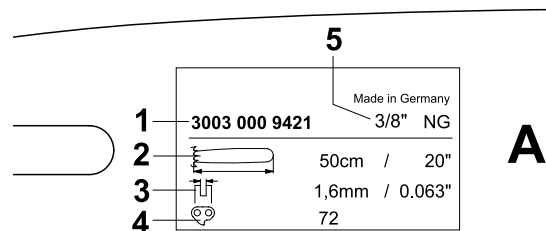

2.

STIHL GUIDE BARS ARE AVAILABLE IN TWO BASIC VERSIONS:

STIHL ROLLOMATIC® Ematic™ bars and STIHL DUROMATIC® Ematic™ bars



TRANSITIONING TO ▼



STIHL ROLLOMATIC® E Standard

STIHL Light 04 - four-rivet (04) sprocket nose

STIHL Light 06 - six-rivet (06) sprocket nose

The standard version of the STIHL ROLLOMATIC® Ematic™ bar consists of three electrically welded metal plates (laminated guide bars). The middle plate is hollowed out, giving the bar great stability with low weight.



TRANSITIONING TO ▼



STIHL ROLLOMATIC® E Light

STIHL Light P04

38% lighter than the standard bar. Made of two steel plates which have been hollowed out and electrically welded together. The open areas have been filled with fiber-reinforced polyamide. Has excellent rigidity for efficient cutting and better balance during limbing operations. Great for arborists. Now available in 16".



TRANSITIONING TO ▼



STIHL ROLLOMATIC® E Mini Light

STIHL Light P01

Light guide bar for use on lightweight chain saws and pole pruners. The 14" (35 cm) bar has a weight advantage of up to 25% over comparable conventional bars. For light-duty applications, especially in small wood harvesting and on pole pruners. Available lengths: 10", 12" and 14".



TRANSITIONING TO ▼



STIHL ROLLOMATIC® E Mini

STIHL Light 01

Available in 10", 12", 14" and 16" lengths. Use with STIHL PICCO™ Micro™ Mini 3 saw chain (PMM3) to increase cutting efficiency over PM1 chain by 13%. Makes smooth pruning cuts.



STIHL ROLLOMATIC® E Super

Unlike the STIHL ROLLOMATIC® E Standard, the STIHL ROLLOMATIC® E Super consists of a solid and particularly rigid bar with a sprocket nose which can be replaced as a whole. Designed for the most demanding professional jobs, it is primarily used on heavy-duty saws for felling and bucking. Features a new angled oil delivery hole (see Ematic™ S illustration).



Ematic™ S Feature

An angled oil delivery hole for the STIHL ROLLOMATIC® E Super and STIHL DUROMATIC® E Guide Bars is designed to improve oil flow to the saw chain.



STIHL ROLLOMATIC® ES Light

Like the STIHL ROLLOMATIC® ES guide bars, STIHL ROLLOMATIC® ES Light guide bars are made of tough, wear-resistant steel.

Moreover, the concept stands out because of large openings and longitudinal ribs in the bar plate. The openings are covered with a cover plate in a special laser welding process.

Advantages / features

- 30% less weight in comparison with STIHL ROLLOMATIC® E Super guide bars
- Good stability – substantially higher resistance to bending and warping than three-part guide bars or comparable light guide bars in this class available on the market



STIHL DUROMATIC® E

A heavy-duty guide bar for chain saws in the middle and high performance ranges. Like the STIHL ROLLOMATIC® E Super, the bar is made of extremely strong, solid steel with induction hardened guide rails. The bar nose is reinforced with a hard surface that is also used in aircraft construction.



TRANSITIONING TO ▼



STIHL Carving E

STIHL Carving

Available in 12" solid nose. Guide bar can be used with 1/4" and 1/4" P saw chain.



Concealed inside the bar nose, the sprocket on the STIHL ROLLOMATIC® E Standard is securely protected against corrosive and abrasive dirt.


STIHL guide bars don't need to be greased.



STIHL ROLLOMATIC® Ematic™ Super bars

have a replaceable sprocket nose at the end of the bar which guides the saw chain from the top of the bar to the bottom, minimizing power losses due to friction. They are available with various size sprocket noses. All have induction hardened rails for long life. Bars with a relatively small radius help to reduce incidence of kickback and are lighter. Those with a larger radius are designed for professionals requiring a higher plunge-cutting performance and longer service life.

Solid steel Ematic™ bars are cut to exactly the right contour with state-of-the-art laser technology.

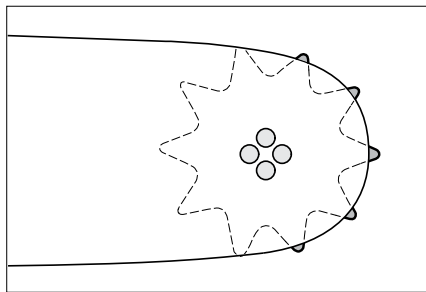


Narrow radius bar nose:

- Reduced kickback
- Average plunge cutting performance
- Sprocket bearing mounted with 4 rivets

Applications:

All-round use in agriculture and construction industry, including small wood harvesting and limbing in the forestry industry on machines up to about 4.7 bhp (3.5 kW).

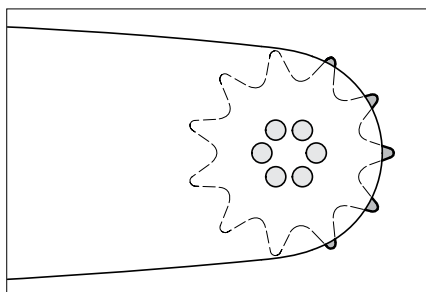

Wide radius bar nose:




- Higher kickback tendency
- High plunge cutting performance
- Large sprocket bearing mounted with 6 rivets - high bearing load rating and longer wear life.

Applications:

Demanding professional use in logging and bucking on medium to high power chain saws of more than 4.7 bhp (3.5 kW).

3.

BAR TAIL TEMPLATES

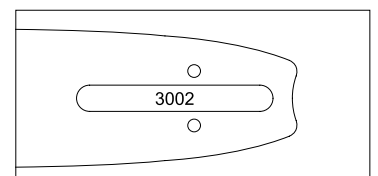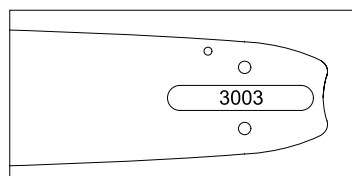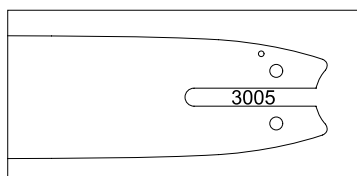

GUIDE BAR SPROCKET NOSE REFERENCE

Guide Bar Order Number	Guide Bar Description Length, Gauge, Pitch, Type	Sprocket Nose Assy. Order Number	Sprocket Only Order Number	Countersunk Rivet
3002 000 9715	17" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3002 000 9723	21" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3002 000 9731	25" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3002 000 9741	30" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3002 000 9748	33" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3002 000 9753	36" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3002 000 9757	41" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3002 000 9576	59" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3002 000 9041	30" .063" $\frac{3}{8}$ " (RS Wide Nose)	3003 650 2539	-	0000 974 0503
3003 000 6313	16" .050" STIHL PICCO™ (Lamin)	Not Applicable	3005 650 9903	0000 974 0421
3003 00X 6813	16" .063" .325" (Lamin)	Not Applicable	3003 650 9926	0000 974 0420
3003 008 6817	18" .063" .325" (Lamin)	Not Applicable	3003 650 9926	0000 974 0420
3003 00X 6821	20" .063" .325" (Lamin)	Not Applicable	3003 650 9926	0000 974 0420
3003 00X 8917	18" .050" $\frac{3}{8}$ " (Lamin)	Not Applicable	3003 650 9928	0000 974 0420
3003 00X 8921	20" .050" $\frac{3}{8}$ " (Lamin)	Not Applicable	3003 650 9928	0000 974 0420
3003 000 7831	25" .050" $\frac{3}{8}$ " (Lamin)	Not Applicable	3003 650 9938	0000 974 0420
3003 00X 6113	16" .063" $\frac{3}{8}$ " (Lamin)	Not Applicable	3003 650 9922	0000 974 0420
3003 008 6117	18" .063" $\frac{3}{8}$ " (Lamin)	Not Applicable	3003 650 9922	0000 974 0420
3003 008 6121	20" .063" $\frac{3}{8}$ " (Lamin)	Not Applicable	3003 650 9922	0000 974 0420
3003 000 5221	20" .063" $\frac{3}{8}$ " (Lamin)	Not Applicable	3003 650 9935	0000 974 0420
3003 000 5231	25" .063" $\frac{3}{8}$ " (Lamin)	Not Applicable	3003 650 9935	0000 974 0420
3003 000 8813	16" .050" $\frac{3}{8}$ " (RS)	3003 650 2551	-	0000 974 0503
3003 000 8817	18" .050" $\frac{3}{8}$ " (RS)	3003 650 2551	-	0000 974 0503
3003 000 8822	20" .050" $\frac{3}{8}$ " (RS)	3003 650 2551	-	0000 974 0503
3003 000 4030	25" .050" $\frac{3}{8}$ " (RS)	3003 650 2558	-	0000 974 0503
3003 000 8830	25" .050" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 8838	28" .050" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 8846	32" .050" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 8853	36" .050" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503

Note: 3003 650 2551 replaces 3003 650 2529

X = available as 000 or 008

(RS) = STIHL ROLLOMATIC® ES Professional Guide Bar

(RS Wide Nose) = STIHL ROLLOMATIC® ES Guide Bar with tip designed to provide better boring capacity for the professional

(Lamin) = STIHL ROLLOMATIC® E Laminated Guide Bar

GUIDE BAR SPROCKET NOSE REFERENCE

Guide Bar Order Number	Guide Bar Description Length, Gauge, Pitch, Type	Sprocket Nose Assy. Order Number	Sprocket Only Order Number	Countersunk Rivet
3003 000 2221	20" .050" $\frac{3}{8}$ " (RS Light)	3003 650 2551	-	0000 974 0503
3003 000 2231	25" .050" $\frac{3}{8}$ " (RS Light)	3003 650 2551	-	0000 974 0503
3003 000 2238	28" .050" $\frac{3}{8}$ " (RS Light)	3003 650 2551	-	0000 974 0503
3003 000 2246	32" .050" $\frac{3}{8}$ " (RS Light)	3003 650 2551	-	0000 974 0503
3003 000 2253	36" .050" $\frac{3}{8}$ " (RS Light)	3003 650 2551	-	0000 974 0503
3003 000 9413	16" .063" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 9417	18" .063" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 9421	20" .063" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 9425	22" .063" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 6038	28" .063" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 6041	30" .063" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 6046	32" .063" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 6053	36" .063" $\frac{3}{8}$ " (RS Narrow Nose)	3003 650 2551	-	0000 974 0503
3003 000 2021	20" .063" $\frac{3}{8}$ " (RS Light)	3003 650 2551	-	0000 974 0503
3003 000 2031	25" .063" $\frac{3}{8}$ " (RS Light)	3003 650 2551	-	0000 974 0503
3003 000 2038	28" .063" $\frac{3}{8}$ " (RS Light)	3003 650 2551	-	0000 974 0503
3003 000 2046	32" .063" $\frac{3}{8}$ " (RS Light)	3003 650 2551	-	0000 974 0503
3003 000 9431	25" .063" $\frac{3}{8}$ " (RS Wide Nose)	3003 650 2551	-	0000 974 0503
3003 000 9721	20" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3003 000 9731	24" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3003 000 9745	32" .063" .404" (RS Wide Nose)	3003 650 2538	-	0000 974 0503
3003 000 7346	32" .063" .404" (RS Narrow Nose)	3003 650 2555	-	0000 974 0503
3003 000 7353	36" .063" .404" (RS Narrow Nose)	3003 650 2555	-	0000 974 0503
3005 000 4805	12" .050" STIHL PICCO™ (Lamin)	Not Applicable	3005 650 9903	0000 974 0421
3005 000 4809	14" .050" STIHL PICCO™ (Lamin)	Not Applicable	3005 650 9903	0000 974 0421
3005 000 7409	14" .050" STIHL PICCO™ (Lightw.)	Not Applicable	3005 650 9903	0000 974 0421
3005 000 7413	16" .050" STIHL PICCO™ (Lightw.)	Not Applicable	3005 650 9903	0000 974 0421
3005 008 4813	16" .050" STIHL PICCO™ (Lamin)	Not Applicable	3005 650 9903	0000 974 0421
3005 000 4817	18" .050" STIHL PICCO™ (Lamin)	Not Applicable	3005 650 9903	0000 974 0421
3005 000 6409	14" .050" $\frac{1}{4}$ " (Lamin)	Not Applicable	3005 650 9904	0000 974 0421
3005 000 6413	16" .050" $\frac{1}{4}$ " (Lamin)	Not Applicable	3005 650 9904	0000 974 0421
3005 008 4713	16" .063" .325" (Lamin)	Not Applicable	3003 650 9926	0000 974 0420
3005 008 4717	18" .063" .325" (Lamin)	Not Applicable	3003 650 9926	0000 974 0420

Note: 3003 650 2551 replaces 3003 650 2529

(RS) = STIHL ROLLOMATIC® ES Professional Guide Bar

(RS Wide Nose) = STIHL ROLLOMATIC® ES Guide Bar with tip designed to provide better boring capacity for the professional

(Lamin) = STIHL ROLLOMATIC® E Laminated Guide Bar



SPECIALLY LABELED GUIDE BARS

SPECIALLY LABELED	ORDER NUMBER	IDENTICAL WITH STANDARD GUIDE BAR	ORDER NUMBER
STIHL WOOD BOSS®	3005 810 7017	STIHL LIGHT 04	3005 008 7017
STIHL WOOD BOSS®	3005 810 4717	STIHL STIHL ROLLOMATIC® E	3005 008 4717
STIHL FARM BOSS®	3003 812 6817	STIHL STIHL ROLLOMATIC® E	3003 008 6817
STIHL FARM BOSS®	3003 812 6821	STIHL STIHL ROLLOMATIC® E	3003 008 6821
STIHL FARM BOSS®	3003 812 3317	STIHL LIGHT 04	3003 008 3317
STIHL FARM BOSS®	3003 812 3321	STIHL LIGHT 04	3003 008 3321

CHAIN SCABBARDS

CHAIN SCABBARD LENGTH	3005 MINI	3005	3003	3002	3006
10" (25 CM)	0000 792 9170	—	—	—	—
12" (35 CM)	0000 792 9171	0000 792 9172	—	—	—
15" (37 CM)	—	—	0000 792 9174	—	—
18" (45 CM)	—	0000 792 9173	0000 792 9175	—	0000 792 9175
22" (55 CM)	—	—	0000 792 9176	—	—
25" (63 CM)	—	—	0000 792 9177	0000 792 9177	—
30" (75 CM)	—	—	0000 792 9178	0000 792 9178	—
36" (90 CM)	—	—	0000 792 9179	0000 792 9179	—
EXTENSION 12"	—	—	0000 792 9140	0000 792 9140	—
14" (ARBOR SAW)	—	0000 792 9160	—	—	—
16" (ARBOR SAW)	—	0000 792 9161	—	—	—

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS											
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES																
25	.404"	.063	80	 3002 000 9731	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSL 80
30	.404"	.063	91	 3002 000 9741	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSL 91
36	.404"	.063	108	 3002 000 9753	—	—	—	46 RM 108	46 RMF 108	46 RMH 108	46 RMK 108	46 RS 108	46 RSF 108	—	—	46 RSL 108
41	.404"	.063	123	 3002 000 9757	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSL 123
59	.404"	.063	173	 3002 000 9576	—	—	—	46 RM 173	46 RMF 173	46 RMH 173	46 RMK 173	46 RS 173	46 RSF 173	—	—	46 RSL 173
STIHL DUOMATIC® E																
25	.404"	.063	80	 3002 000 9231	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSL 80
30	3/8"	.063	100	 3002 000 8041	36 RM3 100	36 RS3 100	36 RD3 100	36 RM 100	—	—	—	36 RS 100	—	36 RSK 100	36 RSL 100	36 RSL 100
	.404"	.063	91	 3002 000 8041	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSL 91
36	3/8"	.063	114	 3002 000 8052	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSL 114
	.404"	.063	104	 3002 000 8052	—	—	—	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	—	—	46 RSL 104
41	3/8"	.063	135	 3002 000 8058	36 RM3 135	36 RS3 135	36 RD3 135	36 RM 135	—	—	—	36 RS 135	—	36 RSK 135	36 RSL 135	36 RSL 135
	.404"	.063	123	 3002 000 8058	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSL 123
47	3/8"	.063	152	 3002 000 8064	36 RM3 152	36 RS3 152	36 RD3 152	36 RM 152	—	—	—	36 RS 152	—	36 RSK 152	36 RSL 152	36 RSL 152
	.404"	.063	138	 3002 000 8064	—	—	—	46 RM 138	46 RMF 138	46 RMH 138	46 RMK 138	46 RS 138	46 RSF 138	—	—	46 RSL 138

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8"	1108 640 2010	8	1108 640 2026	0000 642 1216	8
.404"	1108 640 2000	7	1108 640 2025	0000 642 1207	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Micro™ Mini 3	
STIHL ROLLOMATIC® E MINI						
16	3/8" P	.043	55	● 3005 008 3913	61 PMM3 55 3610 005 0055	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/4" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/4" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/4" P	.050	55	3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	—	—
18	3/4" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/4" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/4" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/4" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
12	3/4" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
14	3/4" P	.043	50	3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
			50	3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—
			51	3005 008 3909	61 PMM3 51	—	—	—	—	—	—	—
			51	3005 000 3909	61 PMM3 51	—	—	—	—	—	—	—
16	3/4" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/4" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/4" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4"	.050	64	3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1120 640 2010	8	—	—	—
3/8" P	1120 640 2000	6	—	—	—
	1120 640 2005	7	—	—	—

009 | 010, 011

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	
16	3/8" P	.043	55	3005 008 3913	● STIHL PICCO™ Micro™ Mini 3
STIHL ROLLOMATIC® E MINI					
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS										
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S	 STIHL RAPID™ Super
STIHL ROLLOMATIC® E															
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	1/4"	.050	72	 3005 000 6409	—	—	—	—	—	—	—	—	13 RM 72	—	—
	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	.325"	.063	62	 3005 008 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
				 3005 000 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
	3/8" P	.050	55	 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	
				 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	
				 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	—	—	63 PM 56	63 PS 56	—	—	
				 3005 008 7017	—	—	—	—	23 RM3 68	23 RD3 68	—	—	23 RM 68	—	23 RS 68
18	.325"	.063	68	 3005 008 4717	—	—	—	—	26 RM3 68	26 RD3 68	—	—	26 RM 68	—	26 RS 68
				 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	—	—	63 PM 61	63 PS 61	—	—	—
STIHL ROLLOMATIC® E LIGHT															
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	—
STIHL ROLLOMATIC® E MINI															
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—	—	—	—
				 3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—	—	—	
			51	 3005 008 3909	61 PMM3 51	—	—	—	—	—	—	—	—	—	—
				 3005 000 3909	61 PMM3 51	—	—	—	—	—	—	—	—	—	—
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT															
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—	—	—	—
CARVING															
12	1/4"	.050	64	 3005 000 3205	—	—	—	—	—	—	—	—	—	13 RMS 64	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1120 640 2010	8	—	—	—
.325"	1120 640 2006	7	—	—	—
3/8" P	1120 640 2000	6	—	—	—
	1120 640 2005	7	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number		
						STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
16	3/8" P	.050	55	 3005 000 4813	63 PS3 55	3616 005 0055
18	3/8" P	.050	61	 3005 008 4817	63 PS3 61	3616 005 0061

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS										
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S	 STIHL RAPID™ Super
STIHL ROLLOMATIC® E															
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	1/4"	.050	72	 3005 000 6409	—	—	—	—	—	—	—	—	13 RM 72	—	—
	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	.325"	.063	62	 3005 008 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
				 3005 000 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
	3/8" P	.050	55	 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	
				 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	
			56	 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	—	—	63 PM 56	63 PS 56	—	—	
				 3005 008 7017	—	—	—	—	23 RM3 68	23 RD3 68	—	—	23 RM 68	—	23 RS 68
18	.325"	.063	68	 3005 008 4717	—	—	—	—	26 RM3 68	26 RD3 68	—	—	26 RM 68	—	26 RS 68
	3/8" P	.050	61	 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	—	—	63 PM 61	63 PS 61	—	—	—
STIHL ROLLOMATIC® E LIGHT															
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	—
STIHL ROLLOMATIC® E MINI															
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—	—	—	—
				 3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—	—	—	
			51	 3005 008 3909	61 PMM3 51	—	—	—	—	—	—	—	—	—	—
				 3005 000 3909	61 PMM3 51	—	—	—	—	—	—	—	—	—	—
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT															
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—	—	—	—
CARVING															
12	1/4"	.050	64	 3005 000 3205	—	—	—	—	—	—	—	—	—	13 RMS 64	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1120 640 2010	8	—	—	—
.325"	1120 640 2006	7	—	—	—
3/8" P	1120 640 2005	7	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number					
									STIHL PICCO™ Micro™ Mini 3
STIHL ROLLOMATIC® E MINI									
16	3/8" P	.043	55	3005 008 3913					61 PMM3 55 3610 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	3005 008 4813 3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
18	3/8" P	.050	61	3005 000 4817	–	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44	–	–	–	–	–
14	3/8" P	.043	50	3005 008 3909 3005 000 3909	61 PMM3 50 61 PMM3 50	–	–	–	–	–
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	–	–	–	–	–
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	–	–	–	–	–
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	–	–	–	–	–

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	1116 640 2001	6	–	–	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number		
16	3/8" P	.043	55	3005 008 3913	● STIHL PICCO™ Micro™ Mini 3	
STIHL ROLLOMATIC® E MINI						
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	3610 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	 3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
				 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
18	3/8" P	.050	61	 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
				 3005 008 3909	61 PMM3 50	—	—	—	—	—	—	
14	3/8" P	.043	50	 3005 000 3909	61 PMM3 50	—	—	—	—	—	—	
				 3005 008 3913	61 PMM3 55	—	—	—	—	—	—	
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4"	.050	64	 3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1123 640 2007	8	—	—	—
3/8" P	1123 640 2003	6	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
16	3/8" P	.043	55	3005 008 3913	STIHL PICCO™ Micro™ Mini 3	
STIHL ROLLOMATIC® E MINI						
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
				3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
				3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
14	3/8" P	.043	50	3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—
				3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4"	.050	64	3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4"	1123 640 2007	8	—	—	—
3/8" P	1123 640 2003	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 4809	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 4813	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 7409	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 7413	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44 3610 005 0044	—
14	3/8" P	.043	50	3005 000 3909	61 PMM3 50 3610 005 0050	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	—

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS			
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3
STIHL ROLLOMATIC® E								
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44
14	1/4"	.050	72	3005 000 6409	—	—	—	—
	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50
16	3/8" P	.050	55	3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55
			56	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61
STIHL ROLLOMATIC® E LIGHT								
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55
STIHL ROLLOMATIC® E MINI								
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—
14	3/8" P	.043	50	3005 008 3909	61 PMM3 50	—	—	—
			51	3005 000 3909	61 PMM3 50	—	—	—
			51	3005 008 3909	61 PMM3 51	—	—	—
			51	3005 000 3909	61 PMM3 51	—	—	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT								
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
$\frac{1}{4}''$	1123 640 2010	8	—	—	—
$\frac{3}{8}''$ P	1123 640 2003	6	—	—	—
	1123 640 2000	7	—	—	—

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E							
12	3/8" P	.050	44	●	3005 000 4805	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	●	3005 000 4809	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	●	3005 000 4813	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E LIGHT							
12	3/8" P	.050	44	●	3005 000 7405	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	●	3005 000 7409	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	●	3005 000 7413	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E MINI							
12	3/8" P	.043	44	●	3005 000 3905	61 PMM3 44 3610 005 0044	—
14	3/8" P	.043	50	●	3005 000 3909	61 PMM3 50 3610 005 0050	—
16	3/8" P	.043	55	●	3005 008 3913	61 PMM3 55 3610 005 0055	—

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E													
12	3/8" P	.050	44	●	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	●	3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	●	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	●	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
				●	3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
18	3/8" P	.050	61	●	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT													
12	3/8" P	.050	44	●	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	●	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	●	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI													
12	3/8" P	.043	44	●	3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
				●	3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
14	3/8" P	.043	50	●	3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—
				●	3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—
16	3/8" P	.043	55	●	3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT													
12	3/8" P	.043	44	●	3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	●	3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING													
12	1/4"	.050	64	●	3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1114 640 2000	8	—	—	—
3/8" P	1114 640 2001	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 4809	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 4813	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 7409	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 7413	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44 3610 005 0044	—
14	3/8" P	.043	50	3005 000 3909	61 PMM3 50 3610 005 0050	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	—

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Duro 3
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—
14	1/4"	.050	72	3005 000 6409	—	—	—	—	—	—
	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—
16	.325"	.063	62	3005 008 4713	—	—	—	—	26 RM3 62	26 RD3 62
				3005 000 4713	—	—	—	—	26 RM3 62	26 RD3 62
	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—
				3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—
				3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	—	—
				3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	—	—
18	.325"	.050	68	3005 008 7017	—	—	—	—	23 RM3 68	23 RD3 68
			68	3005 008 4717	—	—	—	—	26 RM3 68	26 RD3 68
	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	—	—
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—
STIHL ROLLOMATIC® E MINI										
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	3005 008 3909	61 PMM3 50	—	—	—	—	—
				3005 000 3909	61 PMM3 50	—	—	—	—	—
			51	3005 008 3909	61 PMM3 51	—	—	—	—	—
				3005 000 3909	61 PMM3 51	—	—	—	—	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Duro 3
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	3005 000 7605	6l PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	3005 000 7609	6l PMM3 50	—	—	—	—	—

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
.325"	1129 640 2004	7	—	—	—
3/8" P	1129 640 2000	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*						
Pitch						
Drive link gauge / groove width (Inch)						
Drive link count						
Guide bar part number						
						STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E						
18	3/8" P	.050	61	● 3005 000 4817		63 PM3 61 3636 005 0061

[illegible]

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
$\frac{1}{4}$ "	1123 640 2077	8	—	—	—
.325"	1123 640 2074	7	1123 007 1032	0000 642 1236	7
	1123 640 2076	8	1123 007 1031	0000 642 1234	8
$\frac{3}{8}$ " P	1123 640 2073	6	—	—	—
	1123 640 2072	7	1123 007 1030	0000 642 1240	7

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Micro™ 3	
STIHL ROLLOMATIC® E						
16	.325"	.063	67	● 3003 008 6813	26 RM3 67	3689 005 0067
18	.325"	.063	74	● 3003 008 6817	26 RM3 74	3689 005 0074
20	.325"	.063	81	● 3003 008 6821	26 RM3 81	3689 005 0081

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	.325"	.063	67	 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				 3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSK 60	33 RSL 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSK 60	33 RSL 60
18	.325"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSK 60	36 RSL 60
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSK 66	33 RSL 66
	3/8"	.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSK 66	36 RSL 66
				 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSK 72	33 RSL 72
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSK 72	33 RSL 72
				 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSK 72	36 RSL 72
		.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSK 72	36 RSL 72
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSK 60	33 RSL 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSK 60	36 RSL 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSK 60	36 RSL 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSK 66	33 RSL 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSK 66	36 RSL 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSK 72	33 RSL 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSK 72	36 RSL 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSK 72	36 RSL 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSK 76	36 RSL 76
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSK 72	33 RSL 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSK 72	36 RSL 72

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL DUROMATIC® E														
16	3/8"	.325"	.050	67	3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—
			.050	60	3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60
			.063	60	3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60
					3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60
18	3/8"	.063	.063	66	3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66
20	3/8"	.325"	.050	81	3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—
			.050	72	3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72
					3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72
			.063	72	3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1121 640 2000	7	1121 007 1001	0000 642 1236	7
	1121 640 2001	8	1121 007 1002	0000 642 1234	8
	1121 640 2005	8	—	—	—
3/8"	—	—	1121 007 1004	0000 642 1240	7
	—	—	1121 007 1005	0000 642 1241	8
	—	—	1121 007 1035	0000 642 1231	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	
18	.325"	.063	68	3005 008 4717	● STIHL RAPID™ Micro™ 3
STIHL ROLLOMATIC® E					
18	.325"	.063	68	3005 008 4717	26 RM3 68 3689 005 0068

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS										
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Micro™ Min 3	● STIHL PICCO™ Micro™ 3	● STIHL PICCO™ Super 3	● STIHL PICCO™ Duro 3	● STIHL RAPID™ Micro™ 3	● STIHL RAPID™ Duro 3	● STIHL PICCO™ Micro™	● STIHL PICCO™ Super	● STIHL RAPID™ Micro™	● STIHL RAPID™ Micro™ S	● STIHL RAPID™ Super
STIHL ROLLOMATIC® E															
12	3/8" P	.050	44	● 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	1/4"	.050	72	● 3005 000 6409	—	—	—	—	—	—	—	—	13 RM 72	—	—
	3/8" P	.050	50	● 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	.325"	.063	62	● 3005 008 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
				● 3005 000 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
	3/8" P	.050	55	● 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	
				● 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	
			56	● 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	—	—	63 PM 56	63 PS 56	—	—	
				● 3005 000 4817	—	—	—	—	23 RM3 68	23 RD3 68	—	—	23 RM 68	—	23 RS 68
18	.325"	.050	68	● 3005 008 7017	—	—	—	—	26 RM3 68	26 RD3 68	—	—	26 RM 68	—	26 RS 68
		.063	68	● 3005 008 4717	—	—	—	—	—	—	—	—	—	—	
	3/8" P	.050	61	● 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	—	—	63 PM 61	63 PS 61	—	—	—
STIHL ROLLOMATIC® E LIGHT															
12	3/8" P	.050	44	● 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	3/8" P	.050	50	● 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	3/8" P	.050	55	● 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	—
STIHL ROLLOMATIC® E MINI															
12	3/8" P	.043	44	● 3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—	—	—	—
14	3/8" P	.043	50	● 3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—	—	—	—
				● 3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—	—	—	
			51	● 3005 008 3909	61 PMM3 51	—	—	—	—	—	—	—	—	—	—
				● 3005 000 3909	61 PMM3 51	—	—	—	—	—	—	—	—	—	—
16	3/8" P	.043	55	● 3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT															
12	3/8" P	.043	44	● 3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—	—	—	—
14	3/8" P	.043	50	● 3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—	—	—	—
CARVING															
12	1/4"	.050	64	● 3005 000 3205	—	—	—	—	—	—	—	—	—	13 RMS 64	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
$\frac{1}{4}$ "	1123 640 2077	8	—	—	—
.325"	1123 640 2074	7	1123 007 1032	0000 642 1236	7
	1123 640 2076	8	1123 007 1031	0000 642 1234	8
$\frac{3}{8}$ " P	1123 640 2073	6	—	—	—
	1123 640 2072	7	1123 007 1030	0000 642 1240	7

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Micro™ 3	
STIHL ROLLOMATIC® E						
16	.325"	.063	67	● 3003 008 6813	26 RM3 67	3689 005 0067
18	.325"	.063	74	● 3003 008 6817	26 RM3 74	3689 005 0074
20	.325"	.063	81	● 3003 008 6821	26 RM3 81	3689 005 0081

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E																			
16	.325"	.063	67	 3003 008 6813	—	—	—	26 RM3 67	—	26 RD3 67	—	—	26 RM 67	—	26 RS 67	—	—	—	—
				 3003 000 6813	—	—	—	26 RM3 67	—	26 RD3 67	—	—	26 RM 67	—	26 RS 67	—	—	—	—
	3/8"	.050	60	 3003 000 6313	63 PM3 60	63 PS3 60	63 PD3 60	—	—	—	63 PM 60	63 PS 60	—	—	—	—	—	—	
				 3003 008 8913	—	—	—	33 RM3 60	33 RS3 60	33 RD3 60	—	—	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSK 60	33 RSL 60
	18	3/8"	.050	60	 3003 000 8913	—	—	—	33 RM3 60	33 RS3 60	33 RD3 60	—	—	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSK 60
 3003 000 6113					—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSK 60	36 RSL 60
 3003 008 8917					—	—	—	33 RM3 66	33 RS3 66	33 RD3 66	—	—	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSK 66	33 RSL 66
20	3/8"	.063	66	 3003 008 6117	—	—	—	36 RM3 66	36 RS3 66	36 RD3 66	—	—	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSK 66	36 RSL 66
				 3003 008 8921	—	—	—	33 RM3 72	33 RS3 72	33 RD3 72	—	—	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSK 72	33 RSL 72
		.050	72	 3003 008 6121	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSK 72	36 RSL 72
				 3003 000 5221	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSK 72	36 RSL 72
				STIHL ROLLOMATIC® ES															
16	3/8"	.050	60	 3003 000 8813	—	—	—	33 RM3 60	33 RS3 60	33 RD3 60	—	—	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSK 60	33 RSL 60
				 3003 001 9413	—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSK 60	36 RSL 60
				 3003 000 9413	—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSK 60	36 RSL 60
18	3/8"	.050	66	 3003 000 8817	—	—	—	33 RM3 66	33 RS3 66	33 RD3 66	—	—	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSK 66	33 RSL 66
				 3003 000 9417	—	—	—	36 RM3 66	36 RS3 66	36 RD3 66	—	—	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSK 66	36 RSL 66
20	3/8"	.050	72	 3003 000 8822	—	—	—	33 RM3 72	33 RS3 72	33 RD3 72	—	—	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSK 72	33 RSL 72
				 3003 002 9421	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSK 72	36 RSL 72
				 3003 000 9421	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSK 72	36 RSL 72
22	3/8"	.063	76	 3003 000 9425	—	—	—	36 RM3 76	36 RS3 76	36 RD3 76	—	—	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSK 76	36 RSL 76
STIHL ROLLOMATIC® ES LIGHT																			
20	3/8"	.050	72	 3003 000 2221	—	—	—	33 RM3 72	33 RS3 72	33 RD3 72	—	—	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
				 3003 000 2021	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	
STIHL DUROMATIC® E																				
16	3/8"	.325"	.050	67	 3003 000 8613	—	—	—	23 RM3 67	—	23 RD3 67	—	—	23 RM 67	—	23 RS 67	—	—	—	—
		.050	.050	60	 3003 000 8613	—	—	—	33 RM3 60	33 RS3 60	33 RD3 60	—	—	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
		.063	60	 3003 001 9213	—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60	
				 3003 000 9213	—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60	
18	3/8"	.063	.063	66	 3003 000 9217	—	—	—	36 RM3 66	36 RS3 66	36 RD3 66	—	—	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.325"	.050	81	 3003 000 8621	—	—	—	23 RM3 81	—	23 RD3 81	—	—	23 RM 81	—	23 RS 81	—	—	—	—
		.050	.050	72	 3003 000 8621	—	—	—	33 RM3 72	33 RS3 72	33 RD3 72	—	—	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 001 9221	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72	
				 3003 000 9221	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72	

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1121 640 2000	7	1121 007 1001	0000 642 1236	7
	1121 640 2004	7	1121 007 1037	0000 642 1236	7
	1121 640 2001	8	1121 007 1002	0000 642 1234	8
	1121 640 2005	8	1121 007 1038	0000 642 1234	8
3/8"	—	—	1121 007 1035	0000 642 1231	7
	—	—	1121 007 1004	0000 642 1240	7
	—	—	1121 007 1005	0000 642 1241	8

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Micro™ 3	
STIHL ROLLOMATIC® E						
16	.325"	.063	67	● 3003 008 6813	26 RM3 67	3689 005 0067
18	.325"	.063	74	● 3003 008 6817	26 RM3 74	3689 005 0074
20	.325"	.063	81	● 3003 008 6821	26 RM3 81	3689 005 0081

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	.325"	.063	67	 3003 008 6813	26 RM3 67	—	26 RD3 67	26 RM 67	—	26 RS 67	—	—	—	—
				 3003 000 6813	26 RM3 67	—	26 RD3 67	26 RM 67	—	26 RS 67	—	—	—	—
	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
18	3/8"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
	3/8"	.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66
				 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
20	3/8"	.063	72	 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
STIHL ROLLOMATIC® ES														
16	3/8"	.063	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.063	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
				 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.063	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
				 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSL 76
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.063	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
				 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
STIHL DUOMATIC® E														
16	.325"	.050	60	 3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—	—
				 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
	3/8"	.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66
20	.325"	.050	72	 3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—	—
				 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
	3/8"	.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1118 640 2001	7	1118 007 1004	0000 642 1236	7
			1118 007 1003	0000 642 1236	7
			1118 007 1005	0000 642 1234	8
3/8"	—	—	1118 007 1007	0000 642 1231	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
FARMBOSS						
18	.325"	.063	74	● 3003 812 6817	26 RM3 74 3689 005 0074	
20	.325"	.063	81	● 3003 812 6821	26 RM3 81 3689 005 0081	
STIHL ROLLOMATIC® E						
18	.325"	.063	74	● 3003 008 6817	26 RM3 74 3689 005 0074	
20	.325"	.063	81	● 3003 008 6821	26 RM3 81 3689 005 0081	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	.325"	.063	67	 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				 3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
18	3/8"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
	3/8"	.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
				 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
				 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
	3/8"	.063	72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
	3/8"	.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
				 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL DUOMATIC® E														
16	3/8"	.325"	.050	67	 3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—
		.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
			60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.325"	.050	81	 3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—
		.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
			72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1125 640 2005	7	1125 007 1001	0000 642 1236	7
	1125 640 2008	8	1125 007 1000	0000 642 1234	8
3/8"	1125 640 2004	7	1125 007 1002	0000 642 1231	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL RAPID™ Micro™ 3	● STIHL RAPID™ Super 3	● STIHL RAPID™ Duro 3	● STIHL RAPID™ Micro™	● STIHL RAPID™ Micro™ F	● STIHL RAPID™ Super	● STIHL RAPID™ Super F	● STIHL RAPID™ Super K	● STIHL RAPID™ Super L	● STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.325"	.063	67	● 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–
					● 3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–
		.050	60	● 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				● 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
18	3/8"	.063	60	● 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
		.050	66	● 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
				● 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
		.063	66	● 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	● 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	● 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				● 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
		.050	84	● 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
25	3/8"	.063	84	● 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	● 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	● 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				● 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	● 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	● 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	● 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	● 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				● 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72	● 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	● 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	● 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
			84	● 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	● 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL DUOMATIC® E														
16	3/8"	.325"	.050	67	 3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—
		.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
			60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.325"	.050	81	 3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—
		.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
			72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1125 640 2005	7	1125 007 1001	0000 642 1236	7
	1125 640 2008	8	1125 007 1000	0000 642 1234	8
3/8"	1125 640 2004	7	1125 007 1002	0000 642 1231	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	.325"	.063	67	 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				 3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
18	3/8"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
	.050	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66	
			 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	
20	3/8"	.063	72	 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	
			 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84	
STIHL ROLLOMATIC® ES														
16	3/8"	.063	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
				 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.063	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.063	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL DUOMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1113 640 2005	8	1113 007 1041	0000 642 1235	8
3/8"	1113 640 2000	7	1113 007 1040	0000 642 1230	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					 STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	.325"	.063	67	 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				 3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
18	.325"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
	3/8"	.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
				 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
20	.325"	.063	72	 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
				 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
			 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60	
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
				 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
			 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72	
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSL 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
				 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
			 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84	

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84
STIHL DUOMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1113 640 2005	8	1113 007 1041	0000 642 1235	8
3/8"	1113 640 2000	7	1113 007 1040	0000 642 1230	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.063	67	 3003 008 6813	26 RM3 67	—	26 RD3 67	26 RM 67	—	26 RS 67	—	—	—	—
				 3003 000 6813	26 RM3 67	—	26 RD3 67	26 RM 67	—	26 RS 67	—	—	—	—
		.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
18	3/8"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
		.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66
				 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
				 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
			72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
				 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSL 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
				 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
				 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84
STIHL DUOMATIC® E														
16	3/8"	.325"	.050	67	 3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—
		.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
	.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60	
			 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60	
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.325"	.050	81	 3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—
		.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
	.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72	
			 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72	
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1125 640 2005	7	1125 007 1000	0000 642 1234	8
			1125 007 1001	0000 642 1236	7
			1125 007 1003	0000 642 1239	9
3/8"	1125 640 2004	7	1125 007 1002	0000 642 1231	7
			1125 007 1040	0000 642 1249	7
			1125 007 1041	0000 642 1223	7
	1125 640 2006	7	1125 007 1002	0000 642 1231	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.063	68	 3003 008 6813	26 RM3 68	–	26 RD3 68	26 RM 68	–	26 RS 68	–	–	–	–
			 3003 000 6813	26 RM3 68	–	26 RD3 68	26 RM 68	–	26 RS 68	–	–	–	–	
		67	 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–	
	 3003 000 6813		26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–		
	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
			 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60	
18	3/8"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
		.050	66	 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
		.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
			 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72	
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
			 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60	
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
			 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72	
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSL 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
			 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84	
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS										
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	
STIHL ROLLOMATIC® ES LIGHT															
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72	
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72	
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84	
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84	
STIHL DUOMATIC® E															
16	3/8"	.325"	.050	67	 3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—	
		.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60	
			.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
						 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66	
20	3/8"	.325"	.050	81	 3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—	
		.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72	
			.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
						 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84	
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84	

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	—	—	1125 007 1001	0000 642 1236	7
			1125 007 1000	0000 642 1234	8
			1125 007 1003	0000 642 1239	9
3/8"	1125 640 2004	7	1125 007 1041	0000 642 1223	7
			1125 007 1002	0000 642 1231	7
			1125 007 1040	0000 642 1249	7
	1125 640 2006	7	1125 007 1041	0000 642 1223	7
			1125 007 1002	0000 642 1231	7
			1125 007 1040	0000 642 1249	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
		.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.050	66	 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
				 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
		.063	66	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
				 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
		.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
		.063	60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
				 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
		.063	66	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
				 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
		.063	72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSL 76
25	3/8"		84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
				 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
				 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
		.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
25	3/8"	.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL DUROMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8"	0000 642 1223	–	–	–	–

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
		.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.050	66	 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
				 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
		.063	66	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
20	3/8"	.050	72	 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
		.063	72	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
25	3/8"	.050	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84
		.063	84											
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
		.063	60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
				 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
		.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
20	3/8"	.050	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
		.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSL 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
				 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSL 91
				 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	–	36 RS 91	–	36 RSK 91	36 RSL 91	36 RSL 91
		.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	–	36 RS 98	–	36 RSK 98	36 RSL 98	36 RSL 98
32	3/8"	.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSL 105
				 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	–	36 RS 105	–	36 RSK 105	36 RSL 105	36 RSL 105
		.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSL 114
36	3/8"	.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	–	36 RS 114	–	36 RSK 114	36 RSL 114	36 RSL 114
STIHL ROLLOMATIC® ES LIGHT														

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSL 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSL 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSL 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSL 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSL 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSL 114
STIHL DUOMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSL 84

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1119 640 2000	7	1119 007 1003 1119 007 1021	0000 642 1223 0000 642 1216	7 8

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSL 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSL 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSL 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSL 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSL 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSL 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
			84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSL 84
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSL 84
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSL 91
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	–	36 RS 91	–	36 RSK 91	36 RSL 91	36 RSL 91
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	–	36 RS 98	–	36 RSK 98	36 RSL 98	36 RSL 98
32	3/8"	.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSL 105
		.063	105	 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	–	36 RS 105	–	36 RSK 105	36 RSL 105	36 RSL 105
36	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSL 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	–	36 RS 114	–	36 RSK 114	36 RSL 114	36 RSL 114

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSL 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSL 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL DUOMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8"	1113 640 2000	7	1110 007 1040	0000 642 1220	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
				 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
20	3/8"	.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84		
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	–	36 RS 91	–	36 RSK 91	36 RSL 91	36 RSLH 91
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	–	36 RS 98	–	36 RSK 98	36 RSL 98	36 RSLH 98
32	3/8"	.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	–	36 RS 105	–	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	–	36 RS 114	–	36 RSK 114	36 RSL 114	36 RSLH 114

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL DUROMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1117 640 2001	7	1117 007 1006	0000 642 1221	7
	1117 640 2000	7	1117 007 1006	0000 642 1221	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60 3624 005 0060	—
STIHL ROLLOMATIC® ES						
16	3/8"	.050	60	3003 000 8813	33 RS3 60 3624 005 0060	33 RS 60 3623 005 0060
18	3/8"	.050	66	3003 000 8817	33 RS3 66 3624 005 0066	33 RS 66 3623 005 0066
20	3/8"	.050	72	3003 000 8822	33 RS3 72 3624 005 0072	33 RS 72 3623 005 0072
25	3/8"	.050	84	3003 000 8830	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084
				3003 000 4030	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
			 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
			 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	
20	3/8"	.050	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
			 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76	
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
		.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
			 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	
25	3/8"	.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
		.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
			 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91	
28	3/8"	.063	91	 3003 000 6038	36 RM3 92	36 RS3 92	36 RD3 92	36 RM 92	—	36 RS 92	—	36 RSK 92	36 RSL 92	36 RSLH 92
		.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
			 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105	
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	—	36 RS 98	—	36 RSK 98	36 RSL 98	36 RSLH 98
		.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
			 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114	

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL DUOMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
				 3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	—	—	1128 007 1011	0000 642 1239	9
3/8"	1128 640 2000	7	1128 007 1000	1128 007 1000	7
	1128 640 2005	8	1128 007 1001	0000 642 1216	8

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES																
16	3/8"	.050	60	3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	—	—	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	—	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
		.063	60	3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	—	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	—	—	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	—	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
		.063	66	3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	—	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	—	—	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72	3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	66	3003 000 9721	—	—	—	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	—	—	46 RSLH 66
		.063	76	3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	—	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
		.063	76	3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	—	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.050	84	3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	—	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.063	77	3003 000 9731	—	—	—	46 RM 77	46 RMF 77	46 RMH 77	46 RMK 77	46 RS 77	46 RSF 77	—	—	46 RSLH 77
		.050	91	3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	—	—	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	—	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
30	3/8"	.063	98	3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	—	—	—	36 RS 98	—	36 RSK 98	36 RSL 98	36 RSLH 98
32	3/8"	.050	105	3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	—	—	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	—	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
		.063	95	3003 000 7346	—	—	—	46 RM 95	46 RMF 95	46 RMH 95	46 RMK 95	46 RS 95	46 RSF 95	—	—	46 RSLH 95

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
36	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	—	—	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
	.404"	.063	104	 3003 000 7353	—	—	—	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	—	—	46 RSLH 104
STIHL ROLLOMATIC® ES LIGHT																
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	—	—	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	—	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	—	—	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	—	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	—	—	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	—	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	—	—	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL ROLLOMATIC® E																
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	—	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL DUOMATIC® E																
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	—	—	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	—	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	—	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
	.404"	.063	55	 3003 001 9213	—	—	—	46 RM 55	46 RMF 55	46 RMH 55	46 RMK 55	46 RS 55	46 RSF 55	—	—	46 RSLH 55
				 3003 000 9213	—	—	—	46 RM 55	46 RMF 55	46 RMH 55	46 RMK 55	46 RS 55	46 RSF 55	—	—	46 RSLH 55
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	—	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
		.404"	.063	60	 3003 000 9217	—	—	—	46 RM 60	46 RMF 60	46 RMH 60	46 RMK 60	46 RS 60	46 RSF 60	—	—
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	—	—	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
	.404"	.063	66	 3003 001 9221	—	—	—	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	—	—	46 RSLH 66
				 3003 000 9221	—	—	—	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	—	—	46 RSLH 66
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	—	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
	.404"	.063	77	 3003 001 5631	—	—	—	46 RM 77	46 RMF 77	46 RMH 77	46 RMK 77	46 RS 77	46 RSF 77	—	—	46 RSLH 77

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8"	1115 640 2001	7	1115 007 1040	0000 642 1221	7
.404"	1115 640 2005	7	1115 007 1041	0000 642 1206	7

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60 3624 005 0060	—
STIHL ROLLOMATIC® ES						
16	3/8"	.050	60	3003 000 8813	33 RS3 60 3624 005 0060	33 RS 60 3623 005 0060
18	3/8"	.050	66	3003 000 8817	33 RS3 66 3624 005 0066	33 RS 66 3623 005 0066
20	3/8"	.050	72	3003 000 8822	33 RS3 72 3624 005 0072	33 RS 72 3623 005 0072
25	3/8"	.050	84	3003 000 8830	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084
				3003 000 4030	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
				 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
20	3/8"	.050	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
		.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
25	3/8"	.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
		.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
				 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
28	3/8"	.063	91	 3003 000 6038	36 RM3 92	36 RS3 92	36 RD3 92	36 RM 92	—	36 RS 92	—	36 RSK 92	36 RSL 92	36 RSLH 92
		.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
				 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
30	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
				 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL DUOMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
				 3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1128 640 2000	7	1128 007 1000	0000 642 1223	7
	1128 640 2005	8	1128 007 1001	0000 642 1216	8
.325"	—	—	1128 007 1011	0000 642 1239	9

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
			 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
			 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
			84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	—	36 RS 98	—	36 RSK 98	36 RSL 98	36 RSLH 98
32	3/8"	.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL DUOMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1117 640 2001	7	1117 007 1004	0000 642 1223	7
	1117 640 2000	7	1117 007 1006	0000 642 1223	7
			—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES																
25	.404"	.063	80	 3002 000 9731	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSL 80
30	.404"	.063	91	 3002 000 9741	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSL 91
36	.404"	.063	108	 3002 000 9753	—	—	—	46 RM 108	46 RMF 108	46 RMH 108	46 RMK 108	46 RS 108	46 RSF 108	—	—	46 RSL 108
41	.404"	.063	123	 3002 000 9757	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSL 123
STIHL DUOMATIC® E																
25	.404"	.063	80	 3002 000 9231	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSL 80
30	³ / ₈ "	.063	100	 3002 000 8041	36 RM3 100	36 RS3 100	36 RD3 100	36 RM 100	—	—	—	36 RS 100	—	36 RSK 100	36 RSL 100	36 RSL 100
	.404"	.063	91	 3002 000 8041	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSL 91
36	³ / ₈ "	.063	114	 3002 000 8052	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSL 114
	.404"	.063	104	 3002 000 8052	—	—	—	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	—	—	46 RSL 104
41	³ / ₈ "	.063	135	 3002 000 8058	36 RM3 135	36 RS3 135	36 RD3 135	36 RM 135	—	—	—	36 RS 135	—	36 RSK 135	36 RSL 135	36 RSL 135
	.404"	.063	123	 3002 000 8058	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSL 123
47	³ / ₈ "	.063	152	 3002 000 8064	36 RM3 152	36 RS3 152	36 RD3 152	36 RM 152	—	—	—	36 RS 152	—	36 RSK 152	36 RSL 152	36 RSL 152
	.404"	.063	138	 3002 000 8064	—	—	—	46 RM 138	46 RMF 138	46 RMH 138	46 RMK 138	46 RS 138	46 RSF 138	—	—	46 RSL 138

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
$\frac{3}{8}$ "	1111 640 2007	8	1111 640 2026	0000 642 1215	8
.404"	1111 640 2002	7	1111 640 2025	0000 642 1206	7
$\frac{1}{2}$ "	1111 640 2012	6	—	—	—

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E																
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	—	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES																
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	—	—	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	—	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	—	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	—	—	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	—	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
				 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	—	—	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	—	—	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
	.404"	.063	66	 3003 000 9721	—	—	—	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	—	—	46 RSLH 66
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	—	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
			84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	—	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
				 3003 000 9731	—	—	—	46 RM 77	46 RMF 77	46 RMH 77	46 RMK 77	46 RS 77	46 RSF 77	—	—	46 RSLH 77
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	—	—	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	—	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	—	—	—	36 RS 98	—	36 RSK 98	36 RSL 98	36 RSLH 98
32	3/8"	.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	—	—	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	—	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
				 3003 000 7346	—	—	—	46 RM 95	46 RMF 95	46 RMH 95	46 RMK 95	46 RS 95	46 RSF 95	—	—	46 RSLH 95
36	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	—	—	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
				 3003 000 7353	—	—	—	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	—	—	46 RSLH 104

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS											
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT																
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	—	—	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	—	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	—	—	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	—	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	—	—	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	—	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	—	—	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL DUOMATIC® E																
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	—	—	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	—	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	—	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
	.404"	.063	55	 3003 001 9213	—	—	—	46 RM 55	46 RMF 55	46 RMH 55	46 RMK 55	46 RS 55	46 RSF 55	—	—	46 RSLH 55
 3003 000 9213				—	—	—	46 RM 55	46 RMF 55	46 RMH 55	46 RMK 55	46 RS 55	46 RSF 55	—	—	46 RSLH 55	
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	—	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
		.404"	.063	60	 3003 000 9217	—	—	—	46 RM 60	46 RMF 60	46 RMH 60	46 RMK 60	46 RS 60	46 RSF 60	—	—
.050	72				 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	—	—	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72
20	3/8"	.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	—	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 001 9221	—	—	—	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	—	—	46 RSLH 66
	.404"	.063	66	 3003 000 9221	—	—	—	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	—	—	46 RSLH 66
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	—	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	—	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
		.404"	.063	77	 3003 001 5631	—	—	—	46 RM 77	46 RMF 77	46 RMH 77	46 RMK 77	46 RS 77	46 RSF 77	—	—

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1115 640 2001	7	1115 007 1048	0000 642 1215	8
404"	1115 640 2005	7	1115 007 1045	0000 642 1206	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					 STIHL RAPID™ Super 3	 STIHL RAPID™ Super
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	 3003 000 8913	33 RS360 3624 005 0060	—
STIHL ROLLOMATIC® ES						
16	3/8"	.050	60	 3003 000 8813	33 RS360 3624 005 0060	33 RS 60 3623 005 0060
18	3/8"	.050	66	 3003 000 8817	33 RS366 3624 005 0066	33 RS 66 3623 005 0066
20	3/8"	.050	72	 3003 000 8822	33 RS372 3624 005 0072	33 RS 72 3623 005 0072
25	3/8"	.050	84	 3003 000 8830	33 RS384 3624 005 0084	33 RS 84 3623 005 0084
				 3003 000 4030	33 RS384 3624 005 0084	33 RS 84 3623 005 0084
STIHL ROLLOMATIC® ES LIGHT						
28	3/8"	.050	91	 3003 000 2238	33 RS391 3624 005 0091	33 RS 91 3623 005 0091
32	3/8"	.050	105	 3003 000 2246	33 RS3105 3624 005 0105	0105 33 RS105 3623 005
36	3/8"	.050	114	 3003 000 2253	33 RS3114 3624 005 0114	0114 33 RS114 3623 005

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS																
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E																					
20	3/8"	.063	72	 3003 000 5221	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72
25	3/8"	.050	84	 3003 000 7831	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84
		.050	85	 3003 000 7831	—	—	—	33 RM385	33 RS385	33 RD385	—	—	33 RM85	33 RMF85	—	—	33 RS85	33 RSF85	33 RSK85	33 RSL85	33 RSLH85
		.063	84	 3003 000 5231	—	—	—	36 RM384	36 RS384	36 RD384	—	—	36 RM84	—	—	—	36 RS84	—	36 RSK84	36 RSL84	36 RSLH84
STIHL ROLLOMATIC® ES																					
16	3/8"	.050	60	 3003 000 8813	—	—	—	33 RM360	33 RS360	33 RD360	—	—	33 RM60	33 RMF60	—	—	33 RS60	33 RSF60	33 RSK60	33 RSL60	33 RSLH60
		 3003 001 9413	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60		
			 3003 000 9413	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60	
18	3/8"	.050	66	 3003 000 8817	—	—	—	33 RM366	33 RS366	33 RD366	—	—	33 RM66	33 RMF66	—	—	33 RS66	33 RSF66	33 RSK66	33 RSL66	33 RSLH66
		.063	66	 3003 000 9417	—	—	—	36 RM366	36 RS366	36 RD366	—	—	36 RM66	—	—	36 RS66	—	36 RSK66	36 RSL66	36 RSLH66	
20	3/8"	.050	72	 3003 000 8822	—	—	—	33 RM372	33 RS372	33 RD372	—	—	33 RM72	33 RMF72	—	—	33 RS72	33 RSF72	33 RSK72	33 RSL72	33 RSLH72
		 3003 002 9421	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72		
			 3003 000 9421	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72	
	.404"	.063	66	 3003 000 9721	—	—	—	—	—	—	—	—	46 RM66	46 RMF66	46 RMH66	46 RMK66	46 RS66	46 RSF66	—	—	46 RSLH66
22	3/8"	.063	76	 3003 000 9425	—	—	—	36 RM376	36 RS376	36 RD376	—	—	36 RM76	—	—	—	36 RS76	—	36 RSK76	36 RSL76	36 RSLH76
		.050	84	 3003 000 8830	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84
25	3/8"	.050	84	 3003 000 4030	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84
		.063	84	 3003 000 9431	—	—	—	36 RM384	36 RS384	36 RD384	—	—	36 RM84	—	—	—	36 RS84	—	36 RSK84	36 RSL84	36 RSLH84
		.404"	.063	77	 3003 000 9731	—	—	—	—	—	—	—	46 RM77	46 RMF77	46 RMH77	46 RMK77	46 RS77	46 RSF77	—	—	46 RSLH77
28	3/8"	.050	91	 3003 000 8838	—	—	—	33 RM391	33 RS391	33 RD391	—	—	33 RM91	33 RMF91	—	—	33 RS91	33 RSF91	33 RSK91	33 RSL91	33 RSLH91
		.063	91	 3003 000 6038	—	—	—	36 RM391	36 RS391	36 RD391	—	—	36 RM91	—	—	—	36 RS91	—	36 RSK91	36 RSL91	36 RSLH91
		.063	92	 3003 000 6038	—	—	—	36 RM392	36 RS392	36 RD392	—	—	36 RM92	—	—	—	36 RS92	—	36 RSK92	36 RSL92	36 RSLH92
30	3/8"	.063	98	 3003 000 6041	—	—	—	36 RM398	36 RS398	36 RD398	—	—	36 RM98	—	—	—	36 RS98	—	36 RSK98	36 RSL98	36 RSLH98

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS																
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
32	3/8"	.050	105	 3003 000 8846	—	—	—	33RM3105	33RS3105	33RD3105	—	—	33RM105	33RMF105	—	—	33RS105	33RSF105	33RSK105	33RSL105	33RSLH105
		.063	105	 3003 000 6046	—	—	—	36RM3105	36RS3105	36RD3105	—	—	36RM105	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105
	.404"	.063	95	 3003 000 7346	—	—	—	—	—	—	—	—	46RM95	46RMF95	46RMH95	46RMK95	46RS95	46RSF95	—	—	46RSLH95
36	3/8"	.050	114	 3003 000 8853	—	—	—	33RM3114	33RS3114	33RD3114	—	—	33RM114	33RMF114	—	—	33RS114	33RSF114	33RSK114	33RSL114	33RSLH114
		.063	114	 3003 000 6053	—	—	—	36RM3114	36RS3114	36RD3114	—	—	36RM114	—	—	—	36RS114	—	36RSK114	36RSL114	36RSLH114
	.404"	.063	104	 3003 000 7353	—	—	—	—	—	—	—	—	46RM104	46RMF104	46RMH104	46RMK104	46RS104	46RSF104	—	—	46RSLH104
STIHL ROLLOMATIC® ES LIGHT																					
20	3/8"	.050	72	 3003 000 2221	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	—	—	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72
		.063	72	 3003 000 2021	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72
25	3/8"	.050	84	 3003 000 2231	—	—	—	33RM384	33RS384	33RD384	—	—	33RM84	33RMF84	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84
		.063	84	 3003 000 2031	—	—	—	36RM384	36RS384	36RD384	—	—	36RM84	—	—	—	36RS84	—	36RSK84	36RSL84	36RSLH84
28	3/8"	.050	91	 3003 000 2238	—	—	—	33RM391	33RS391	33RD391	—	—	33RM91	33RMF91	—	—	33RS91	33RSF91	33RSK91	33RSL91	33RSLH91
		.063	91	 3003 000 2038	—	—	—	36RM391	36RS391	36RD391	—	—	36RM91	—	—	—	36RS91	—	36RSK91	36RSL91	36RSLH91
32	3/8"	.050	105	 3003 000 2246	—	—	—	33RM3105	33RS3105	33RD3105	—	—	33RM105	33RMF105	—	—	33RS105	33RSF105	33RSK105	33RSL105	33RSLH105
		.063	105	 3003 000 2046	—	—	—	36RM3105	36RS3105	36RD3105	—	—	36RM105	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105
36	3/8"	.050	114	 3003 000 2253	—	—	—	33RM3114	33RS3114	33RD3114	—	—	33RM114	33RMF114	—	—	33RS114	33RSF114	33RSK114	33RSL114	33RSLH114
		.063	114	 3003 000 2053	—	—	—	36RM3114	36RS3114	36RD3114	—	—	36RM114	—	—	—	36RS114	—	36RSK114	36RSL114	36RSLH114
STIHL DUOMATIC® E																					
16	3/8"	.050	60	 3003 000 8613	—	—	—	33RM360	33RS360	33RD360	—	—	33RM60	33RMF60	—	—	33RS60	33RSF60	33RSK60	33RSL60	33RSLH60
		.063	60	 3003 001 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	—	—	36RS60	—	36RSK60	36RSL60	36RSLH60
				 3003 000 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	—	—	36RS60	—	36RSK60	36RSL60	36RSLH60
	.404"	.063	55	 3003 001 9213	—	—	—	—	—	—	—	—	46RM55	46RMF55	46RMH55	46RMK55	46RS55	46RSF55	—	—	46RSLH55
18	3/8"	.063	66	 3003 000 9217	—	—	—	36RM366	36RS366	36RD366	—	—	36RM66	—	—	—	36RS66	—	36RSK66	36RSL66	36RSLH66
				 3003 000 9217	—	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	46RS66	46RSF66	—	—	46RSLH66
					 3003 000 9217	—	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	46RS66	46RSF66	—	—
	.404"	.063	60	 3003 000 9217	—	—	—	—	—	—	—	—	46RM60	46RMF60	46RMH60	46RMK60	46RS60	46RSF60	—	—	46RSLH60
20	3/8"	.050	72	 3003 000 8621	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	—	—	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72
				 3003 001 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72
					 3003 000 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RS72	—	36RSK72	36RSL72
	.404"	.063	66	 3003 001 9221	—	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	46RS66	46RSF66	—	—	46RSLH66
 3003 000 9221				—	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	46RS66	46RSF66	—	—	46RSLH66	
25	3/8" P	.050	84	 3003 000 5531	63PM384	63PS384	63PD384	—	—	—	63PM84	63PS84	—	—	—	—	—	—	—	—	—
		.050	84	 3003 000 5531	—	—	—	33RM384	33RS384	33RD384	—	—	33RM84	33RMF84	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84
	3/8"	.063	84	 3003 001 5631	—	—	—	36RM384	36RS384	36RD384	—	—	36RM84	—	—	—	36RS84	—	36RSK84	36RSL84	36RSLH84
			85	 3003 001 5631	—	—	—	36RM385	36RS385	36RD385	—	—	36RM85	—	—	—	36RS85	—	36RSK85	36RSL85	36RSLH85
	.404"	.063	77	 3003 001 5631	—	—	—	—	—	—	—	—	46RM77	46RMF77	46RMH77	46RMK77	46RS77	46RSF77	—	—	46RSLH77

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8"	1122 640 2002	7	1122 007 1000	0000 642 1223	7
	1122 640 2000	8	1122 007 1001	0000 642 1216	8
3/8" P	1122 640 2006	7	—	—	—
	1122 640 2001	7	1122 007 1002	0000 642 1207	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS			
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3		STIHL RAPID™ Super	
STIHL ROLLOMATIC® E								
16	3/8"	.050	60	3003 000 8913	33 RS360	3624 005 0060	—	
STIHL ROLLOMATIC® ES								
16	3/8"	.050	60	3003 000 8813	33 RS360	3624 005 0060	33 RS60	3623 005 0060
18	3/8"	.050	66	3003 000 8817	33 RS366	3624 005 0066	33 RS66	3623 005 0066
20	3/8"	.050	72	3003 000 8822	33 RS372	3624 005 0072	33 RS72	3623 005 0072
25	3/8"	.050	84	3003 000 8830	33 RS384	3624 005 0084	33 RS84	3623 005 0084
				3003 000 4030	33 RS384	3624 005 0084	33 RS84	3623 005 0084
STIHL ROLLOMATIC® ES LIGHT								
28	3/8"	.050	91	3003 000 2238	33 RS391	3624 005 0091	33 RS91	3623 005 0091
32	3/8"	.050	105	3003 000 2246	3 RS3105	3624 005 0105	33 RS105	3623 005 0105
36	3/8"	.050	114	3003 000 2253	3 RS3114	3624 005 0114	33 RS114	3623 005 0114

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS																
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E																					
25	3/8"	.050	85	 3003 000 7831	—	—	—	33 RM385	33 RS385	33 RD385	—	—	33 RM85	33 RMF85	—	—	33 RS85	33 RSF85	33 RSK85	33 RSL85	33 RSLH85
		.050	84	 3003 000 7831	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84
		.063	84	 3003 000 5231	—	—	—	36 RM384	36 RS384	36 RD384	—	—	36 RM84	—	—	—	36 RS84	—	36 RSK84	36 RSL84	36 RSLH84
STIHL ROLLOMATIC® ES																					
16	3/8"	.050	60	 3003 000 8813	—	—	—	33 RM360	33 RS360	33 RD360	—	—	33 RM60	33 RMF60	—	—	33 RS60	33 RSF60	33 RSK60	33 RSL60	33 RSLH60
		.063	60	 3003 001 9413	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60
			 3003 000 9413	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60	
18	3/8"	.050	66	 3003 000 8817	—	—	—	33 RM366	33 RS366	33 RD366	—	—	33 RM66	33 RMF66	—	—	33 RS66	33 RSF66	33 RSK66	33 RSL66	33 RSLH66
		.063	66	 3003 000 9417	—	—	—	36 RM366	36 RS366	36 RD366	—	—	36 RM66	—	—	—	36 RS66	—	36 RSK66	36 RSL66	36 RSLH66
20	3/8"	.050	72	 3003 000 8822	—	—	—	33 RM372	33 RS372	33 RD372	—	—	33 RM72	33 RMF72	—	—	33 RS72	33 RSF72	33 RSK72	33 RSL72	33 RSLH72
		.063	72	 3003 000 9421	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72
			 3003 002 9421	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72	
			 3003 000 9721	—	—	—	—	—	—	—	—	—	46 RM66	46 RMF66	46 RMH66	46 RMK66	46 RS66	46 RSF66	—	—	46 RSLH66
22	3/8"	.063	76	 3003 000 9425	—	—	—	36 RM376	36 RS376	36 RD376	—	—	36 RM76	—	—	—	36 RS76	—	36 RSK76	36 RSL76	36 RSLH76
25	3/8"	.050	84	 3003 000 8830	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84
			 3003 000 4030	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84	
		.063	84	 3003 000 9431	—	—	—	36 RM384	36 RS384	36 RD384	—	—	36 RM84	—	—	—	36 RS84	—	36 RSK84	36 RSL84	36 RSLH84
			 3003 000 9731	—	—	—	—	—	—	—	—	—	46 RM77	46 RMF77	46 RMH77	46 RMK77	46 RS77	46 RSF77	—	—	46 RSLH77
28	3/8"	.050	91	 3003 000 8838	—	—	—	33 RM391	33 RS391	33 RD391	—	—	33 RM91	33 RMF91	—	—	33 RS91	33 RSF91	33 RSK91	33 RSL91	33 RSLH91
		.063	92	 3003 000 6038	—	—	—	36 RM392	36 RS392	36 RD392	—	—	36 RM92	—	—	—	36 RS92	—	36 RSK92	36 RSL92	36 RSLH92
			 3003 000 6038	—	—	—	36 RM391	36 RS391	36 RD391	—	—	36 RM91	—	—	—	36 RS91	—	36 RSK91	36 RSL91	36 RSLH91	
30	3/8"	.063	98	 3003 000 6041	—	—	—	36 RM398	36 RS398	36 RD398	—	—	36 RM98	—	—	—	36 RS98	—	36 RSK98	36 RSL98	36 RSLH98

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS																
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
32	3/8"	.050	105	 3003 000 8846	—	—	—	33RM3105	33RS3105	33RD3105	—	—	33RM105	33RMF105	—	—	33RS105	33RSF105	33RSK105	33RSL105	33RSLH105
		.063	105	 3003 000 6046	—	—	—	36RM3105	36RS3105	36RD3105	—	—	36RM105	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105
	.404"	.063	95	 3003 000 7346	—	—	—	—	—	—	—	—	46RM95	46RMF95	46RMH95	46RMK95	46RS95	46RSF95	—	—	46RSLH95
36	3/8"	.050	114	 3003 000 8853	—	—	—	33RM3114	33RS3114	33RD3114	—	—	33RM114	33RMF114	—	—	33RS114	33RSF114	33RSK114	33RSL114	33RSLH114
		.063	114	 3003 000 6053	—	—	—	36RM3114	36RS3114	36RD3114	—	—	36RM114	—	—	—	36RS114	—	36RSK114	36RSL114	36RSLH114
	.404"	.063	104	 3003 000 7353	—	—	—	—	—	—	—	—	46RM104	46RMF104	46RMH104	46RMK104	46RS104	46RSF104	—	—	46RSLH104
STIHL ROLLOMATIC® ES LIGHT																					
20	3/8"	.050	72	 3003 000 2221	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	—	—	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72
		.063	72	 3003 000 2021	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72
25	3/8"	.050	84	 3003 000 2231	—	—	—	33RM384	33RS384	33RD384	—	—	33RM84	33RMF84	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84
		.063	84	 3003 000 2031	—	—	—	36RM384	36RS384	36RD384	—	—	36RM84	—	—	—	36RS84	—	36RSK84	36RSL84	36RSLH84
28	3/8"	.050	91	 3003 000 2238	—	—	—	33RM391	33RS391	33RD391	—	—	33RM91	33RMF91	—	—	33RS91	33RSF91	33RSK91	33RSL91	33RSLH91
		.063	91	 3003 000 2038	—	—	—	36RM391	36RS391	36RD391	—	—	36RM91	—	—	—	36RS91	—	36RSK91	36RSL91	36RSLH91
32	3/8"	.050	105	 3003 000 2246	—	—	—	33RM3105	33RS3105	33RD3105	—	—	33RM105	33RMF105	—	—	33RS105	33RSF105	33RSK105	33RSL105	33RSLH105
		.063	105	 3003 000 2046	—	—	—	36RM3105	36RS3105	36RD3105	—	—	36RM105	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105
36	3/8"	.050	114	 3003 000 2253	—	—	—	33RM3114	33RS3114	33RD3114	—	—	33RM114	33RMF114	—	—	33RS114	33RSF114	33RSK114	33RSL114	33RSLH114
		.063	114	 3003 000 2053	—	—	—	36RM3114	36RS3114	36RD3114	—	—	36RM114	—	—	—	36RS114	—	36RSK114	36RSL114	36RSLH114
STIHL DUOMATIC® E																					
16	3/8"	.050	60	 3003 000 8613	—	—	—	33RM360	33RS360	33RD360	—	—	33RM60	33RMF60	—	—	33RS60	33RSF60	33RSK60	33RSL60	33RSLH60
		.063	60	 3003 001 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	—	—	36RS60	—	36RSK60	36RSL60	36RSLH60
				 3003 000 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	—	—	36RS60	—	36RSK60	36RSL60	36RSLH60
	.404"	.063	55	 3003 001 9213	—	—	—	—	—	—	—	—	46RM55	46RMF55	46RMH55	46RMK55	46RS55	46RSF55	—	—	46RSLH55
18	3/8"	.063	66	 3003 000 9213	—	—	—	—	—	—	—	—	46RM55	46RMF55	46RMH55	46RMK55	46RS55	46RSF55	—	—	46RSLH55
				 3003 000 9217	—	—	—	36RM366	36RS366	36RD366	—	—	36RM66	—	—	—	36RS66	—	36RSK66	36RSL66	36RSLH66
				 3003 000 9217	—	—	—	—	—	—	—	—	46RM60	46RMF60	46RMH60	46RMK60	46RS60	46RSF60	—	—	46RSLH60
	20	3/8"	.050	72	 3003 000 8621	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	—	—	33RS72	33RSF72	33RSK72	33RSL72
.063			72	 3003 001 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72
				 3003 000 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72
.404"		.063	66	 3003 001 9221	—	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	46RS66	46RSF66	—	—	46RSLH66
25	3/8"	.050	84	 3003 000 5531	63PM384	63PS384	63PD384	—	—	—	63PM84	63PS84	—	—	—	—	—	—	—	—	—
				 3003 000 5531	—	—	—	33RM384	33RS384	33RD384	—	—	33RM84	33RMF84	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84
				 3003 001 5631	—	—	—	36RM385	36RS385	36RD385	—	—	36RM85	—	—	—	36RS85	—	36RSK85	36RSL85	36RSLH85
				 3003 001 5631	—	—	—	36RM384	36RS384	36RD384	—	—	36RM84	—	—	—	36RS84	—	36RSK84	36RSL84	36RSLH84
	.404"	.063	77	 3003 001 5631	—	—	—	—	—	—	—	—	46RM77	46RMF77	46RMH77	46RMK77	46RS77	46RSF77	—	—	46RSLH77

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8"	1122 640 2000	8	1122 007 1001	0000 642 1216	8
	1122 640 2002	—	1122 007 1000	0000 642 1223	7
3/8" P	1122 640 2006	7	—	—	—
404"	1122 640 2001	7	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS						
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES											
20	.404"	.063	66	3002 000 9721	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	46 RSLH 66
25	.404"	.063	77	3002 000 9731	46 RM 77	46 RMF 77	46 RMH 77	46 RMK 77	46 RS 77	46 RSF 77	46 RSLH 77
32	.404"	.063	95	3002 000 7346	46 RM 95	46 RMF 95	46 RMH 95	46 RMK 95	46 RS 95	46 RSF 95	46 RSLH 95
36	.404"	.063	104	3002 000 7353	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	46 RSLH 104
STIHL DUOMATIC® E											
16	.404"	.063	55	3002 001 9213	46 RM 55	46 RMF 55	46 RMH 55	46 RMK 55	46 RS 55	46 RSF 55	46 RSLH 55
				3002 000 9213	46 RM 55	46 RMF 55	46 RMH 55	46 RMK 55	46 RS 55	46 RSF 55	46 RSLH 55
18	.404"	.063	60	3002 000 9217	46 RM 60	46 RMF 60	46 RMH 60	46 RMK 60	46 RS 60	46 RSF 60	46 RSLH 60
20	.404"	.063	66	3002 001 9221	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	46 RSLH 66
				3002 000 9221	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	46 RSLH 66
25	.404"	.063	77	3002 001 5631	46 RM 77	46 RMF 77	46 RMH 77	46 RMK 77	46 RS 77	46 RSF 77	46 RSLH 77

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.404"	1106 640 2011	7	1106 640 2025	0000 642 1207	7
1/2"	1106 640 2031	6	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES																
25	.404"	.063	80	 3002 000 9731	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSL 80
30	.404"	.063	91	 3002 000 9741	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSL 91
36	.404"	.063	108	 3002 000 9753	—	—	—	46 RM 108	46 RMF 108	46 RMH 108	46 RMK 108	46 RS 108	46 RSF 108	—	—	46 RSL 108
41	.404"	.063	123	 3002 000 9757	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSL 123
STIHL DUOMATIC® E																
25	.404"	.063	80	 3002 000 9231	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSL 80
30	³ / ₈ "	.063	100	 3002 000 8041	36 RM3 100	36 RS3 100	36 RD3 100	36 RM 100	—	—	—	36 RS 100	—	36 RSK 100	36 RSL 100	36 RSL 100
	.404"	.063	91	 3002 000 8041	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSL 91
36	³ / ₈ "	.063	114	 3002 000 8052	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSL 114
	.404"	.063	104	 3002 000 8052	—	—	—	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	—	—	46 RSL 104
41	³ / ₈ "	.063	135	 3002 000 8058	36 RM3 135	36 RS3 135	36 RD3 135	36 RM 135	—	—	—	36 RS 135	—	36 RSK 135	36 RSL 135	36 RSL 135
	.404"	.063	123	 3002 000 8058	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSL 123
47	³ / ₈ "	.063	152	 3002 000 8064	36 RM3 152	36 RS3 152	36 RD3 152	36 RM 152	—	—	—	36 RS 152	—	36 RSK 152	36 RSL 152	36 RSL 152
	.404"	.063	138	 3002 000 8064	—	—	—	46 RM 138	46 RMF 138	46 RMH 138	46 RMK 138	46 RS 138	46 RSF 138	—	—	46 RSL 138

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
$\frac{3}{8}$ " 404*	— 1111 640 2002	— 7	1111 640 2026 1111 640 2025	0000 642 1215 0000 642 1206	8 7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® ES						
21	3/8"	.063	75	3002 000 9123	36 RS3 75 3626 005 0075	—
25	.404"	.063	80	3002 000 9731	—	46 RS 80 3946 005 0080

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES																
25	.404"	.063	80	3002 000 9731	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSLH 80
30	.404"	.063	91	3002 000 9741	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSLH 91
36	.404"	.063	108	3002 000 9753	—	—	—	46 RM 108	46 RMF 108	46 RMH 108	46 RMK 108	46 RS 108	46 RSF 108	—	—	46 RSLH 108
41	.404"	.063	123	3002 000 9757	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSLH 123
59	.404"	.063	173	3002 000 9576	—	—	—	46 RM 173	46 RMF 173	46 RMH 173	46 RMK 173	46 RS 173	46 RSF 173	—	—	46 RSLH 173
STIHL DUOMATIC® E																
25	.404"	.063	80	3002 000 9231	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSLH 80
30	3/8"	.063	100	3002 000 8041	36 RM3 100	36 RS3 100	36 RD3 100	36 RM 100	—	—	—	36 RS 100	—	36 RSK 100	36 RSL 100	36 RSLH 100
	.404"	.063	91	3002 000 8041	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSLH 91
36	3/8"	.063	114	3002 000 8052	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
	.404"	.063	104	3002 000 8052	—	—	—	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	—	—	46 RSLH 104
41	3/8"	.063	135	3002 000 8058	36 RM3 135	36 RS3 135	36 RD3 135	36 RM 135	—	—	—	36 RS 135	—	36 RSK 135	36 RSL 135	36 RSLH 135
	.404"	.063	123	3002 000 8058	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSLH 123
47	3/8"	.063	152	3002 000 8064	36 RM3 152	36 RS3 152	36 RD3 152	36 RM 152	—	—	—	36 RS 152	—	36 RSK 152	36 RSL 152	36 RSLH 152
	.404"	.063	138	3002 000 8064	—	—	—	46 RM 138	46 RMF 138	46 RMH 138	46 RMK 138	46 RS 138	46 RSF 138	—	—	46 RSLH 138

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1124 640 2004	8	1124 007 1025	0000 642 1216	8
.404"	1124 640 2005	7	1124 007 1024	0000 642 1207	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® ES						
21	3/8"	.063	75	3002 000 9123	36 RS3 75 3626 005 0075	—
25	.404"	.063	80	3002 000 9731	—	46 RS 80 3946 005 0080

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES																
25	.404"	.063	80	3002 000 9731	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSLH 80
30	.404"	.063	91	3002 000 9741	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSLH 91
36	.404"	.063	108	3002 000 9753	—	—	—	46 RM 108	46 RMF 108	46 RMH 108	46 RMK 108	46 RS 108	46 RSF 108	—	—	46 RSLH 108
41	.404"	.063	123	3002 000 9757	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSLH 123
59	.404"	.063	173	3002 000 9576	—	—	—	46 RM 173	46 RMF 173	46 RMH 173	46 RMK 173	46 RS 173	46 RSF 173	—	—	46 RSLH 173
STIHL DUOMATIC® E																
25	.404"	.063	80	3002 000 9231	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	—	—	46 RSLH 80
30	3/8"	.063	100	3002 000 8041	36 RM3 100	36 RS3 100	36 RD3 100	36 RM 100	—	—	—	36 RS 100	—	36 RSK 100	36 RSL 100	36 RSLH 100
	.404"	.063	91	3002 000 8041	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	—	—	46 RSLH 91
36	3/8"	.063	114	3002 000 8052	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
	.404"	.063	104	3002 000 8052	—	—	—	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	—	—	46 RSLH 104
41	3/8"	.063	135	3002 000 8058	36 RM3 135	36 RS3 135	36 RD3 135	36 RM 135	—	—	—	36 RS 135	—	36 RSK 135	36 RSL 135	36 RSLH 135
	.404"	.063	123	3002 000 8058	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	—	—	46 RSLH 123
47	3/8"	.063	152	3002 000 8064	36 RM3 152	36 RS3 152	36 RD3 152	36 RM 152	—	—	—	36 RS 152	—	36 RSK 152	36 RSL 152	36 RSLH 152
	.404"	.063	138	3002 000 8064	—	—	—	46 RM 138	46 RMF 138	46 RMH 138	46 RMK 138	46 RS 138	46 RSF 138	—	—	46 RSLH 138

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1124 640 2004	8	1124 007 1025	0000 642 1216	8
.404"	1124 640 2005	7	1124 007 1024	0000 642 1207	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS						
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES											
25	.404"	.063	80	3002 000 9731	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	46 RSLH 80
30	.404"	.063	91	3002 000 9741	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	46 RSLH 91
36	.404"	.063	108	3002 000 9753	46 RM 108	46 RMF 108	46 RMH 108	46 RMK 108	46 RS 108	46 RSF 108	46 RSLH 108
41	.404"	.063	123	3002 000 9757	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	46 RSLH 123
59	.404"	.063	173	3002 000 9576	46 RM 173	46 RMF 173	46 RMH 173	46 RMK 173	46 RS 173	46 RSF 173	46 RSLH 173
STIHL DUOMATIC® E											
25	.404"	.063	80	3002 000 9231	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	46 RSLH 80
30	.404"	.063	91	3002 000 8041	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RS 91	46 RSF 91	46 RSLH 91
36	.404"	.063	104	3002 000 8052	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	46 RSLH 104
41	.404"	.063	123	3002 000 8058	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	46 RS 123	46 RSF 123	46 RSLH 123
47	.404"	.063	138	3002 000 8064	46 RM 138	46 RMF 138	46 RMH 138	46 RMK 138	46 RS 138	46 RSF 138	46 RSLH 138

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.404"	1106 640 2015	7	—	—	—
1/2"	1106 640 2035	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		
						●	STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI							
10	1/4" P	.043	56	●	3005 008 3403	71 PM3 56	3670 005 0056
12	1/4" P	.043	64	●	3005 008 3405	71 PM3 64	3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		
						●	STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI							
14	1/4" P	.043	72	●	3005 008 3409	71 PM3 72	
CARVING							
12	1/4" P	.043	64	●	3005 000 3105	71 PM3 64	

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	1146 640 2004	8	—	—	—
3/8" P	1146 640 2006	8	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

MS 150 C, MS 150 TC |
MS 151 C, MS 151 TC

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		
						●	STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI							
10	1/4" P	.043	56	●	3005 008 3403	71 PM3 56	3670 005 0056
12	1/4" P	.043	64	●	3005 008 3405	71 PM3 64	3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		
						●	STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI							
14	1/4" P	.043	72	●	3005 008 3409	71 PM3 72	
CARVING							
12	1/4" P	.043	64	●	3005 000 3105	71 PM3 64	

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	1146 640 2004	8	—	—	—
3/8" P	1146 640 2006	8	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

MS 150 C, MS 150 TC |
MS 151 C, MS 151 TC

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number					
16	3/8" P	.043	55	3005 003 3913					STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI									
16	3/8" P	.043	55	3005 003 3913					61 PMM3 55 3610 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.043	44	 3005 000 4405	61 PMM3 44	—	61 PS3 44	—	—	—
		.050		 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	—
14	3/8" P	.043	50	 3005 000 4409	61 PMM3 50	—	61 PS3 50	—	—	—
		.050		 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.043	55	 3005 000 4413	61 PMM3 55	—	61 PS3 55	—	—	—
		.050		 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
18	3/8" P	.043	61	 3005 000 4417	61 PMM3 61	—	61 PS3 61	—	—	—
		.050		 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E MINI										
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—
		 3005 000 3909		61 PMM3 50	—	—	—	—	—	
16	3/8" P	.043	55	 3005 000 3913	61 PMM3 55	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.050	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—
14	3/8" P	.050	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	1148 640 2000	6	1148 640 2001	–	–

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Micro™ Mini 3	
STIHL ROLLOMATIC® E MINI						
16	3/8" P	.043	55	● 3005 008 3913	61 PMM3 55 3610 005 0055	
STIHL ROLLOMATIC® MINI						
16	3/8" P	.043	55	● 3005 003 3913	61 PMM3 55 3610 005 0055	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	 3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
				 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
18	3/8" P	.050	61	 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
10	1/4" P	.043	56	 3005 008 3403	—	71 PM3 56	—	—	—	—	—	—
12	1/4" P	.043	64	 3005 008 3405	—	71 PM3 64	—	—	—	—	—	—
	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
14	1/4" P	.043	72	 3005 008 3409	—	71 PM3 72	—	—	—	—	—	—
				 3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
	3/8" P	.043	50	 3005 003 3909	61 PMM3 50	—	—	—	—	—	—	—
				 3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4" P	.043	64	 3005 000 3105	—	71 PM3 64	—	—	—	—	—	—
	1/4"	.050	64	 3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1123 640 2007	8	—	—	—
3/8" P	1123 640 2003	6	—	—	—

MS 170, MS 170C I
MS 171, MS 171C

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number		
						STIHL PICCO™ Micro™ Mini 3
STIHL ROLLOMATIC® E MINI						
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55 3610 005 0055	
STIHL ROLLOMATIC® MINI						
16	3/8" P	.043	55	 3005 003 3913	61 PMM3 55 3610 005 0055	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	 3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	–	–
14	1/4"	.050	72	 3005 000 6409	–	–	–	–	–	–	13 RM 72	–
	3/8" P	.050	50	 3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	–	–
16	3/8" P	.050	55	 3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	–	–
				 3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	–	–
18	3/8" P	.050	61	 3005 000 4817	–	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	–	–
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	 3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	–	–
14	3/8" P	.050	50	 3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	–	–
16	3/8" P	.050	55	 3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	–	–
STIHL ROLLOMATIC® E MINI												
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	–	–	–	–	–	–	–
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	–	–	–	–	–	–	–
				 3005 000 3309	61 PMM3 50	–	–	–	–	–	–	–
				 3005 003 3909	61 PMM3 50	–	–	–	–	–	–	–
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	–	–	–	–	–	–	–
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	–	–	–	–	–	–	–
CARVING												
12	1/4"	.050	64	 3005 000 3205	–	–	–	–	–	–	–	13 RMS 64

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1123 640 2007	8	–	–	–
3/8" P	1123 640 2073	6	–	–	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number					
16	3/8" P	.043	55	3005 003 3913	STIHL PICCO™ Micro™ 3	61 PMM3 55	3610 005 0055		

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.043	44	 3005 000 4405	61 PMM3 44	—	61 PS3 44	—	—	—
		.050		 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.043	50	 3005 000 4409	61 PMM3 50	—	61 PS3 50	—	—	—
		.050		 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.043	55	 3005 000 4413	61 PMM3 55	—	61 PS3 55	—	—	—
		.050		 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
18	3/8" P	.043	61	 3005 000 4417	61 PMM3 61	—	61 PS3 61	—	—	—
		.050		 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E MINI										
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—
				 3005 000 3909	61 PMM3 50	—	—	—	—	—
16	3/8" P	.043	55	 3005 000 3913	61 PMM3 55	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.050	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—
14	3/8" P	.050	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	1148 640 2000	6	1148 640 2001	–	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	
STIHL ROLLOMATIC® E MINI						
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55 3610 005 0055	
STIHL ROLLOMATIC® MINI					 3005 003 3913	
16	3/8" P	.043	55			

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	 3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
				 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
18	3/8" P	.050	61	 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
				 3005 000 3309	61 PMM3 50	—	—	—	—	—	—	—
				 3005 003 3909	61 PMM3 50	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4"	.050	64	3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4"	1123 640 2007	8	—	—	—
3/8" P	1123 640 2003	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number		
STIHL ROLLOMATIC® E MINI						
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	
STIHL ROLLOMATIC® MINI						
16	3/8" P	.043	55	3005 003 3913	61 PMM3 55 3610 005 0055	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	 3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
				 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
18	3/8" P	.050	61	 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
				 3005 000 3309	61 PMM3 50	—	—	—	—	—	—	—
				 3005 003 3909	61 PMM3 50	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4"	.050	64	 3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4"	1123 640 2007	8	—	—	—
3/8" P	1123 640 2073	6	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3				
16	3/8" P	.050	55	3005 000 4813	63 PM3 55 3636 005 0055				

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E									
12	3/8" P	.043	44	 3005 000 4405	—	61 PS3 44	—	—	—
		.050	44	 3005 000 4805	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	—
14	3/8" P	.043	50	 3005 000 4409	—	61 PS3 50	—	—	—
		.050	50	 3005 000 4809	63 PM3 50	61 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.043	55	 3005 000 4413	—	61 PS3 55	—	—	—
		.050	55	 3005 000 4813	63 PM3 55	61 PS3 55	63 PD3 55	63 PM 55	63 PS 55
18	3/8" P	.043	61	 3005 000 4417	—	61 PS3 61	—	—	—
		.050	61	 3005 000 4817	63 PM3 61	61 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E LIGHT									
12	3/8" P	.050	44	 3005 000 7405	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	—
14	3/8" P	.050	50	 3005 000 7409	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	1148 640 2000	6	1148 640 2001	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 4809	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 4813	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 7409	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 7413	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44 3610 005 0044	—
14	3/8" P	.043	50	3005 000 3909	61 PMM3 50 3610 005 0050	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	—

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS			
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3
STIHL ROLLOMATIC® E								
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44
14	1/4"	.050	72	3005 000 6409	—	—	—	—
	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50
16	3/8" P	.050	55	3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55
			56	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61
STIHL ROLLOMATIC® E LIGHT								
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55
STIHL ROLLOMATIC® E MINI								
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—
			50	3005 008 3909	61 PMM3 50	—	—	—
				3005 000 3909	61 PMM3 50	—	—	—
				3005 008 3909	61 PMM3 51	—	—	—
			51	3005 000 3909	61 PMM3 51	—	—	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT								
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1123 640 2007	8	—	—	—
3/8" P	1123 640 2003	6	—	—	—
	1123 640 2002	7	—	—	—

MS 190 T
MS 191 T

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 4809	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 4813	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 7409	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 7413	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44 3610 005 0044	—
14	3/8" P	.043	50	3005 000 3909	61 PMM3 50 3610 005 0050	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	—
STIHL ROLLOMATIC® E MINI LIGHT						
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44 3610 005 0044	—
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50 3610 005 0050	—

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
				3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	—	—
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS							
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
10	1/4" P	.043	56	3005 008 3403	—	71 PM3 56	—	—	—	—	—	—
12	1/4" P	.043	64	3005 008 3405	—	71 PM3 64	—	—	—	—	—	—
	3/8" P	.043	44	3005 000 3905	Ø1 PMM3 44	—	—	—	—	—	—	—
14	1/4" P	.043	72	3005 008 3409	—	71 PM3 72	—	—	—	—	—	—
	3/8" P	.043	50	3005 008 3909	Ø1 PMM3 50	—	—	—	—	—	—	—
			51	3005 000 3909	Ø1 PMM3 51	—	—	—	—	—	—	—
			51	3005 008 3909	Ø1 PMM3 51	—	—	—	—	—	—	—
			51	3005 000 3909	Ø1 PMM3 51	—	—	—	—	—	—	—
	3/4" P	.043	55	3005 008 3913	Ø1 PMM3 55	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/8" P	.043	44	3005 000 7605	Ø1 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	3005 000 7609	Ø1 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4" P	.043	64	3005 000 3105	—	71 PM3 64	—	—	—	—	—	—
	1/4"	.050	64	3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4"	1137 640 2009	8	—	—	—
1/4" P	1137 640 2006	8	—	—	—
1/4" P	1137 640 2008	8	—	—	—
3/8" P	1137 640 2005	6	—	—	—
	1137 640 2007	7	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 4809	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 4813	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 7409	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 7413	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44 3610 005 0044	—
14	3/8" P	.043	50	3005 000 3909	61 PMM3 50 3610 005 0050	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	—

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS			
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3
STIHL ROLLOMATIC® E								
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44
14	1/4"	.050	72	3005 000 6409	—	—	—	—
	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50
16	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55
				3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61
STIHL ROLLOMATIC® E LIGHT								
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55
STIHL ROLLOMATIC® E MINI								
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—
				3005 008 3909	61 PMM3 50	—	—	—
			50	3005 000 3909	61 PMM3 50	—	—	—
				3005 008 3909	61 PMM3 51	—	—	—
14	3/8" P	.043	51	3005 000 3909	61 PMM3 51	—	—	—
				3005 008 3909	61 PMM3 51	—	—	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS			
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3
STIHL ROLLOMATIC® E MINI LIGHT								
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1137 640 2009	8	—	—	—
	1137 640 2006	8	—	—	—
3/8" P	1137 640 2005	6	—	—	—
	1137 640 2007	7	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	–	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 4809	–	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 4813	–	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	–	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 7409	–	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 7413	–	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	44	3005 000 3905	6l PMM3 44 3610 005 0044	–
14	3/8" P	.043	50	3005 000 3909	6l PMM3 50 3610 005 0050	–
16	3/8" P	.043	55	3005 008 3913	6l PMM3 55 3610 005 0055	–
STIHL ROLLOMATIC® E MINI LIGHT						
12	3/8" P	.043	44	3005 000 7605	6l PMM3 44 3610 005 0044	–
14	3/8" P	.043	50	3005 000 7609	6l PMM3 50 3610 005 0050	–

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	3005 000 4805	–	63 PM3 44	–	63 PD3 44	63 PM 44	63 PS 44	–	–
14	1/4"	.050	72	3005 000 6409	–	–	–	–	–	–	13 RM 72	–
	3/8" P	.050	50	3005 000 4809	–	63 PM3 50	–	63 PD3 50	63 PM 50	63 PS 50	–	–
16	3/8" P	.050	55	3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	–	–
			56	3005 000 4813	–	63 PM3 55	–	63 PD3 55	63 PM 55	63 PS 55	–	–
			56	3005 000 4813	–	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	–	–
18	3/8" P	.050	61	3005 000 4817	–	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	–	–
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	3005 000 7405	–	63 PM3 44	–	63 PD3 44	63 PM 44	63 PS 44	–	–
14	3/8" P	.050	50	3005 000 7409	–	63 PM3 50	–	63 PD3 50	63 PM 50	63 PS 50	–	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS							
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S
16	3/4" P	.050	55	 3005 000 7413	—	63 PM3 55	—	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
10	1/2" P	.043	56	 3005 008 3403	—	71 PM3 56	—	—	—	—	—	—
12	1/2" P	.043	64	 3005 008 3405	—	71 PM3 64	—	—	—	—	—	—
	1/2" P	.043	72	 3005 008 3409	—	71 PM3 72	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
			51	 3005 008 3909	61 PMM3 51	—	—	—	—	—	—	—
				 3005 000 3909	61 PMM 51	—	—	—	—	—	—	—
CARVING												
12	1/4" P	.043	64	 3005 000 3105	—	71 PM3 64	—	—	—	—	—	—
	1/4" P	.050	64	 3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/2"	1137 640 2006	8	—	—	—
1/4" P	1137 640 2008	8	—	—	—
3/8" P	1137 640 2005	6	—	—	—
	1137 640 2007	7	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 4809	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 4813	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 7409	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 7413	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44 3610 005 0044	—
14	3/8" P	.043	50	3005 000 3909	61 PMM3 50 3610 005 0050	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	—

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS			
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3
STIHL ROLLOMATIC® E								
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	—	63 PD3 44
14	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	—	63 PD3 50
16	3/8" P	.050	55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55
				 3005 000 4813	—	63 PM3 55	—	63 PD3 55
			56	 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56
18	3/8" P	.050	61	 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61
STIHL ROLLOMATIC® E LIGHT								
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	—	63 PD3 44
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	—	63 PD3 50
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	—	63 PD3 55
STIHL ROLLOMATIC® E MINI								
10	1/4" P	.043	56	 3005 008 3403	—	71 PM3 56	—	—
12	1/4" P	.043	64	 3005 008 3405	—	71 PM3 64	—	—
14	1/4" P	.043	72	 3005 008 3409	—	71 PM3 72	—	—
			50	 3005 008 3909	61 PMM3 50	—	—	—
	3/8" P	.043		 3005 008 3909	61 PMM3 51	—	—	—
			51	 3005 000 3909	61 PMM3 51	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT								
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	1137 640 2006	8	—	—	—
	1137 640 2008	8	—	—	—
3/8" P	1137 640 2005	6	—	—	—
	1137 640 2007	7	—	—	—

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS		
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Super 3	
STIHL ROLLOMATIC® E							
12	3/8" P	.050	44	 3005 000 4805	—	63 PS3 44 3616 005 0044	
14	3/8" P	.050	50	 3005 000 4809	—	63 PS3 50 3616 005 0050	
16	3/8" P	.050	55	 3005 000 4813	—	63 PS3 55 3616 005 0055	
STIHL ROLLOMATIC® E LIGHT							
12	3/8" P	.050	44	 3005 000 7405	—	63 PS3 44 3616 005 0044	
14	3/8" P	.050	50	 3005 000 7409	—	63 PS3 50 3616 005 0050	
16	3/8" P	.050	55	 3005 000 7413	—	63 PS3 55 3616 005 0055	
STIHL ROLLOMATIC® E MINI							
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44 3610 005 0044	—	
14	3/8" P	.043	50	 3005 000 3909	61 PMM3 50 3610 005 0050	—	
				 3005 003 3909	61 PMM3 50 3610 005 0050	—	
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55 3610 005 0055	—	
STIHL ROLLOMATIC® E MINI LIGHT							
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44 3610 005 0044	—	
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50 3610 005 0050	—	
STIHL LIGHT 04							
14	3/8" P	.043	50	 3005 000 4409	—	61 PS3 50 3699 005 0050	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL LIGHT 04												
12	3/8" P	.043	44	3005 000 4405	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	3005 000 4409	61 PMM3 50	—	61 PS3 55	—	—	—	—	—
16	3/8" P	.043	55	3005 000 4413	61 PMM3 55	—	61 PS3 55	—	—	—	—	—
18	3/8" P	.043	61	3005 000 4417	—	—	61 PS3 61	—	—	—	—	—
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	—	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	—	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
				3005 000 4813	—	63 PM3 55	—	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	—	—
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	—	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	—	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	—	63 PD3 55	63 PM 55	63 PS 55	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E MINI												
10	1/4" P	.043	56	 3005 008 3403	—	71 PM3 56	—	—	—	—	—	—
12	1/4" P	.043	64	 3005 008 3405	—	71 PM3 64	—	—	—	—	—	—
	1/4" P	.043	72	 3005 008 3409	—	71 PM3 72	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	6l PMM3 50	—	—	—	—	—	—	—
				 3005 003 3909	6l PMM3 50	—	—	—	—	—	—	—
				 3005 000 3909	6l PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4" P	.043	64	 3005 000 3105	—	71 PM3 64	—	—	—	—	—	—
	1/4" P	.050	64	 3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	1137 640 2006	8	—	—	—
1/4" P	1137 640 2008	8	—	—	—
3/8" P	1137 640 2005	6	—	—	—
	1137 640 2007	7	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 4809	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 4813	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	—	63 PS3 44 3616 005 0044
14	3/8" P	.050	50	3005 000 7409	—	63 PS3 50 3616 005 0050
16	3/8" P	.050	55	3005 000 7413	—	63 PS3 55 3616 005 0055
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44 3610 005 0044	—
14	3/8" P	.043	50	3005 003 3909	61 PMM3 50 3610 005 0050	—
				3005 000 3909	61 PMM3 50 3610 005 0050	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	—
STIHL LIGHT 04						
14	3/8" P	.043	50	3005 000 4409	—	61 PS3 50 3699 005 0050

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS			
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3
STIHL LIGHT 04								
12	3/8" P	.043	44	3005 000 4405	61 PMM3 44	—	—	—
14	3/8" P	.043	50	3005 000 4409	61 PMM3 50	—	61 PS3 55	—
16	3/8" P	.043	55	3005 000 4413	61 PMM3 55	—	61 PS3 55	—
STIHL ROLLOMATIC® E								
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	—	63 PD3 44
14	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	—	63 PD3 50
16	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55
				3005 000 4813	—	63 PM3 55	—	63 PD3 55
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61
STIHL ROLLOMATIC® E LIGHT								
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	—	63 PD3 44
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	—	63 PD3 50
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	—	63 PD3 55
STIHL ROLLOMATIC® E MINI								
10	1/4" P	.043	56	3005 008 3403	—	71 PM3 56	—	—
12	1/4" P	.043	64	3005 008 3405	—	71 PM3 64	—	—
14	1/4" P	.043	72	3005 008 3409	—	71 PM3 72	—	—
	3/8" P	.043	50	3005 008 3909	61 PMM3 50	—	—	—
				3005 003 3909	61 PMM3 50	—	—	—
				3005 000 3909	61 PMM3 50	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS			
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3
STIHL ROLLOMATIC® E MINI LIGHT								
12	3/4" P	.043	44	● 3005 000 7605	61 PMM3 44	—	—	—
14	3/4" P	.043	50	● 3005 000 7609	61 PMM3 50	—	—	—

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	1137 640 2006	8	—	—	—
	1137 640 2008	8	—	—	—
3/8" P	1137 640 2005	6	—	—	—
	1137 640 2007	7	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Super 3	
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	63 PS3 44	3616 005 0044
14	3/8" P	.050	50	3005 000 4809	63 PS3 50	3616 005 0050
16	3/8" P	.050	55	3005 008 4813	63 PS3 55	3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	63 PS3 44	3616 005 0044
14	3/8" P	.050	50	3005 000 7409	63 PS3 50	3616 005 0050
16	3/8" P	.050	55	3005 000 7413	63 PS3 55	3616 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Super
STIHL ROLLOMATIC® E														
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—
16	.325"	.063	62	3005 008 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	26 RS 62
				3005 000 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	26 RS 62
	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—
				3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—
18	.325"	.050	68	3005 008 7017	—	—	—	—	23 RM3 68	23 RD3 68	—	—	23 RM 68	23 RS 68
		.063	68	3005 008 4717	—	—	—	—	26 RM3 68	26 RD3 68	—	—	26 RM 68	26 RS 68
	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	—	—	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT														
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
.325"	1129 640 2004	7	—	—	—
3/8" P	1129 640 2000	6	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Super 3	
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	3005 000 4805	63 PS3 44	3616 005 0044
14	3/8" P	.050	50	3005 000 4809	63 PS3 50	3616 005 0050
16	3/8" P	.050	55	3005 008 4813	63 PS3 55	3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	3005 000 7405	63 PS3 44	3616 005 0044
14	3/8" P	.050	50	3005 000 7409	63 PS3 50	3616 005 0050
16	3/8" P	.050	55	3005 000 7413	63 PS3 55	3616 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Duro 3
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	–	–
14	3/8" P	.050	50	3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	–	–
16	.325"	.063	62	3005 008 4713	–	–	–	–	26 RM3 62	26 RD3 62
				3005 000 4713	–	–	–	–	26 RM3 62	26 RD3 62
	3/8" P	.050	55	3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	–	–
				3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	–	–
18	.325"	.050	68	3005 008 7017	–	–	–	–	23 RM3 68	23 RD3 68
		.063	68	3005 008 4717	–	–	–	–	26 RM3 68	26 RD3 68
	3/8" P	.050	61	3005 000 4817	–	63 PM3 61	63 PS3 61	63 PD3 61	–	–
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	–	–
14	3/8" P	.050	50	3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	–	–
16	3/8" P	.050	55	3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	–	–

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1129 640 2004	7	–	–	–
3/8" P	1129 640 2000	6	–	–	–

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
						STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	 3005 000 4805	63 PS3 44	3616 005 0044
14	3/8" P	.050	50	 3005 000 4809	63 PS3 50	3616 005 0050
16	3/8" P	.050	55	 3005 008 4813	63 PS3 55	3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	 3005 000 7405	63 PS3 44	3616 005 0044
14	3/8" P	.050	50	 3005 000 7409	63 PS3 50	3616 005 0050
16	3/8" P	.050	55	 3005 000 7413	63 PS3 55	3616 005 0055
STIHL LIGHT 04						
14	3/8" P	.043	50	 3005 000 4409	61 PS3 50	3699 005 0050
16	3/8" P	.043	55	 3005 000 4413	61 PS3 55	3699 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS						
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL LIGHT 04											
12	3/8" P	.043	44	3005 000 4405	—	61 PS3 44	—	—	—	—	—
14	3/8" P	.043	50	3005 000 4409	—	61 PS3 50	—	—	—	—	—
16	3/8" P	.043	55	3005 000 4413	—	61 PS3 55	—	—	—	—	—
STIHL ROLLOMATIC® E											
12	3/8" P	.050	44	3005 000 4805	63 PM3 44	—	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4" P	.050	72	3005 000 6409	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	3005 000 4809	63 PM3 50	—	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 008 4813	63 PM3 55	—	63 PD3 55	63 PM 55	63 PS 55	—	—
				3005 000 4813	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
18	3/8" P	.050	61	3005 000 4817	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT											
12	3/8" P	.050	44	3005 000 7405	63 PM3 44	—	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	3005 000 7409	63 PM3 50	—	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 000 7413	63 PM3 55	—	63 PD3 55	63 PM 55	63 PS 55	—	—
CARVING											
12	1/4" P	.050	64	3005 000 3205	—	—	—	—	—	—	13 RMS 64

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	T145 640 2011	8	—	—	—
3/8" P	T145 640 2010	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Super 3	
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	● 3005 000 4805	63 PS3 44	3616 005 0044
14	3/8" P	.050	50	● 3005 000 4809	63 PS3 50	3616 005 0050
16	3/8" P	.050	55	● 3005 008 4813	63 PS3 55	3616 005 0055
STIHL ROLLOMATIC® E LIGHT						
12	3/8" P	.050	44	● 3005 000 7405	63 PS3 44	3616 005 0044
14	3/8" P	.050	50	● 3005 000 7409	63 PS3 50	3616 005 0050
16	3/8" P	.050	55	● 3005 000 7413	63 PS3 55	3616 005 0055
STIHL LIGHT O4						
14	3/8" P	.043	50	● 3005 000 4409	61 PS3 50	3699 005 0050
16	3/8" P	.043	55	● 3005 000 4413	61 PS3 55	3699 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS		
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3
STIHL LIGHT O4							
12	3/8" P	.043	44	3005 000 4405	-	61 PS3 44	-
14	3/8" P	.043	50	3005 000 4409	-	61 PS3 50	-
16	3/8" P	.043	55	3005 000 4413	-	61 PS3 55	-
STIHL ROLLOMATIC® E							
12	3/8" P	.050	44	3005 000 4805	63 PM3 44	-	63 PD3 44
14	3/8" P	.050	50	3005 000 4809	63 PM3 50	-	63 PD3 50
16	3/8" P	.050	55	3005 008 4813	63 PM3 55	-	63 PD3 55
				3005 000 4813	63 PM3 55	63 PS3 55	63 PD3 55
18	3/8" P	.050	61	3005 000 4817	63 PM3 61	63 PS3 61	63 PD3 61
STIHL ROLLOMATIC® E LIGHT							
12	3/8" P	.050	44	3005 000 7405	63 PM3 44	-	63 PD3 44
14	3/8" P	.050	50	3005 000 7409	63 PM3 50	-	63 PD3 50
16	3/8" P	.050	55	3005 000 7413	63 PM3 55	-	63 PD3 55

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1145 640 2011	8	-	-	-
3/8" P	1145 640 2010	6	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	
18	3/8" P	.050	61	 3005 000 4817	63 PM3 61	3636 005 0061

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

[illegible]

CHAIN SPROCKETS

 Chain pitch (lnch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1123 640 2077	8	—	—	—
.325"	1123 640 2074	7	1123 007 1032	0000 642 1236	7
	1123 640 2076	8	1123 007 1031	0000 642 1234	8
3/8" P	1123 640 2073	6	—	—	—
	1123 640 2072	7	1123 007 1030	0000 642 1240	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

MS 201 T, MS 201 TC
MS 210, MS 210 C

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS			
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number				
18	3/8" P	.050	61		3005 000 4817	STIHL PICCO™ Micro™ 3	63 PM3 61	3636 005 0061	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44		3005 000 4805	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50		3005 000 4809	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55		3005 008 4813	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
					3005 000 4813	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56		3005 000 4813	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
18	3/8" P	.050	61		3005 000 4817	—	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44		3005 000 7405	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50		3005 000 7409	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55		3005 000 7413	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8" P	1123 640 2073 1123 640 2072	6 7	— 1123 007 1030	— 0000 642 1240	— 7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number		
18	3/8" P	.050	61	3005 000 4817	STIHL PICCO™ Micro™ 3 63 PM3 61 3636 005 0061	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E									
12	3/8" P	.043	44	 3005 000 4405	—	61 PS3 44	—	—	—
		.050	44	 3005 000 4805	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	—
14	3/8" P	.043	50	 3005 000 4409	—	61 PS3 50	—	—	—
		.050	50	 3005 000 4809	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.043	55	 3005 000 4413	—	61 PS3 55	—	—	—
		.050	55	 3005 000 4813	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
18	3/8" P	.043	61	 3005 000 4417	—	61 PS3 61	—	—	—
		.050	61	 3005 000 4817	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E LIGHT									
12	3/8" P	.050	44	 3005 000 7405	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	—
14	3/8" P	.050	50	 3005 000 7409	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	63 PM3 55	63 PS 3 55	63 PD3 55	63 PM 55	63 PS 55

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	1148 640 2000	6	1148 640 2001	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS
Guide bar length (inch)*					
Pitch					
Drive link gauge / groove width (inch)					
Drive link count					
Guide bar part number					
					● STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E					
18	3/8" P	.050	61	● 3005 000 4817	63 PM3 61 3636 005 0061

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS										
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S	 STIHL RAPID™ Super
STIHL ROLLOMATIC® E															
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	1/4"	.050	72	 3005 000 6409	—	—	—	—	—	—	—	—	13 RM 72	—	—
	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	.325"	.063	62	 3005 008 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
				 3005 000 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
				 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	—
	3/8" P	.050	55	 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	—
				 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	—	—	63 PM 56	63 PS 56	—	—	—
				 3005 008 7017	—	—	—	—	23 RM3 68	23 RD3 68	—	—	23 RM 68	—	23 RS 68
18	.325"	.063	68	 3005 008 4717	—	—	—	—	26 RM3 68	26 RD3 68	—	—	26 RM 68	—	26 RS 68
				 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	—	—	63 PM 61	63 PS 61	—	—	—
	3/8" P	.050	61	 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	—	—	63 PM 61	63 PS 61	—	—	—
STIHL ROLLOMATIC® E LIGHT															
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	—
CARVING															
12	1/4"	.050	64	 3005 000 3205	—	—	—	—	—	—	—	—	—	13 RMS 64	—

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4"	1123 640 2077	8	—	—	—
.325"	1123 640 2074	7	1123 007 1032	0000 642 1236	7
	1123 640 2076	8	1123 007 1031	0000 642 1234	8
3/8" P	1123 640 2073	6	—	—	—
	1123 640 2072	7	1123 007 1030	0000 642 1240	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL PICCO™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8" P	.050	55	● 3005 000 4813	63 PS3 55	3616 005 0055
18	3/8" P	.050	61	● 3005 008 4817	63 PS3 61	3616 005 0061

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S	STIHL RAPID™ Super
STIHL ROLLOMATIC® E														
12	3/8" P	.050	44	3005 000 4805	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	1/4"	.050	72	3005 000 6409	—	—	—	—	—	—	—	13 RM 72	13 RMS 72	—
	3/8" P	.050	50	3005 000 4809	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	.325"	.063	62	3005 008 4713	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
				3005 000 4713	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	—	26 RS 62
	3/8" P	.050	55	3005 008 4813	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	—
				3005 000 4813	63 PM3 55	—	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	—
			56	3005 000 4813	63 PM3 56	63 PS3 56	63 PD3 56	—	—	63 PM 56	63 PS 56	—	—	—
				3005 000 4813	63 PM3 56	63 PS3 56	63 PD3 56	—	—	63 PM 56	63 PS 56	—	—	—
18	.325"	.050	68	3005 008 7017	—	—	—	23 RM3 68	23 RD3 68	—	—	23 RM 68	—	23 RS 68
			68	3005 008 4717	—	—	—	26 RM3 68	26 RD3 68	—	—	26 RM 68	—	26 RS 68
	3/8" P	.050	61	3005 000 4817	63 PM3 61	63 PS3 61	63 PD3 61	—	—	63 PM 61	63 PS 61	—	—	—
STIHL ROLLOMATIC® E LIGHT														
12	3/8" P	.050	44	3005 000 7405	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—	—
14	3/8" P	.050	50	3005 000 7409	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—	—
16	3/8" P	.050	55	3005 000 7413	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—	—
CARVING														
12	1/4"	.050	64	3005 000 3205	—	—	—	—	—	—	—	13 RM 64	13 RMS 64	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1123 640 2007	8	—	—	—
.325"	1143 640 2002	7	1143 007 1003 1143 007 1004	0000 642 1236 0000 642 1234	7 8
3/8" P	1143 640 2000	6	1143 007 1002	0000 642 1240	7

MS 241, MS 241 C |
MS 250, MS 250 C

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
						STIHL RAPID™ Micro™ 3
STIHL ROLLOMATIC® E						
18	.325"	.063	68	 3005 008 4717	26 RM3 68	3689 005 0068
STIHL LIGHT 04						
18	.325"	.050	68	 3005 008 7017	23 RM3 68	3695 005 0068

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS										
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S	 STIHL RAPID™ Super
STIHL ROLLOMATIC® E															
12	3/8" P	.050	44	 3005 000 4805	63 PM3 44	63 PS3 44	63 PD3 44	—	—	—	63 PM 44	63 PS 44	—	—	—
14	1/2"	.050	72	 3005 000 6409	—	—	—	—	—	—	—	—	13 RM 72	—	—
	3/8" P	.050	50	 3005 000 4809	63 PM3 50	63 PS3 50	63 PD3 50	—	—	—	63 PM 50	63 PS 50	—	—	—
16	.325"	.050	62	 3005 000 7013	—	—	—	23 RM3 62	23 RS3 62	—	—	—	23 RM 62	—	23 RS 62
		.063	62	 3005 008 4713	—	—	—	26 RM3 62	—	26 RD3 62	—	—	26 RM 62	—	26 RS 62
				 3005 000 4713	—	—	—	26 RM3 62	—	26 RD3 62	—	—	26 RM 62	—	26 RS 62
	3/8" P	.050	55	 3005 008 4813	63 PM3 55	63 PS3 55	63 PD3 55	—	—	—	63 PM 55	63 PS 55	—	—	—
				 3005 000 4813	63 PM3 55	63 PS3 55	63 PD3 55	—	—	—	63 PM 55	63 PS 55	—	—	—
				 3005 000 4813	63 PM3 56	63 PS3 56	63 PD3 56	—	—	—	63 PM 56	63 PS 56	—	—	—
18	.325"	.050	68	 3005 008 7017	—	—	—	23 RM3 68	23 RS3 68	23 RD3 68	—	—	23 RM 68	—	23 RS 68
		.063	68	 3005 008 4717	—	—	—	—	—	26 RD3 68	—	—	26 RM 68	—	26 RS 68
	3/8" P	.050	61	 3005 000 4817	63 PM3 61	63 PS3 61	63 PD3 61	—	—	—	63 PM 61	63 PS 61	—	—	—
STIHL ROLLOMATIC® E LIGHT															
12	3/8" P	.050	44	 3005 000 7405	63 PM3 44	63 PS3 44	63 PD3 44	—	—	—	63 PM 44	63 PS 44	—	—	—
14	3/8" P	.050	50	 3005 000 7409	63 PM3 50	63 PS3 50	63 PD3 50	—	—	—	63 PM 50	63 PS 50	—	—	—
16	3/8" P	.050	55	 3005 000 7413	63 PM3 55	63 PS3 55	63 PD3 55	—	—	—	63 PM 55	63 PS 55	—	—	—
CARVING															
12	1/2"	.050	64	 3005 000 3205	—	—	—	—	—	—	—	—	—	13 RMS 64	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1123 640 2077	8	—	—	—
.325"	1123 640 2074	7	1123 007 1032	0000 642 1236	7
	1123 640 2076	8	1123 007 1031	0000 642 1234	8
3/8" P	1123 640 2072	7	1123 007 1030	0000 642 1240	7
	1123 640 2073	6	—	—	—

MS 250, MS 250 C |
MS 251, MS 251 C

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Micro™ 3	
STIHL ROLLOMATIC® E						
16	.325"	.063	62	● 3005 008 4713	26 RM3 62	3689 005 0062
18	.325"	.063	68	● 3005 008 4717	26 RM3 68	3689 005 0068
STIHL LIGHT 04						
18	.325"	.050	68	● 3005 008 7017	23 RM3 68	3695 005 0068
WOODBOS						
18	.325"	.050	68	● 3005 810 7017	23 RM3 68	3695 005 0068
		● 3005 810 4717		26 RM3 68	3689 005 0068	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS										
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S	 STIHL RAPID™ Super
STIHL ROLLOMATIC® E															
12	3/8" P	.050	44	 3005 000 4805	63 PM3 44	63 PS3 44	63 PD3 44	—	—	—	63 PM 44	63 PS 44	—	—	—
14	1/4"	.050	72	 3005 000 6409	—	—	—	—	—	—	—	—	13 RM 72	—	—
	3/8" P	.050	50	 3005 000 4809	63 PM3 50	63 PS3 50	63 PD3 50	—	—	—	63 PM 50	63 PS 50	—	—	—
16	.325"	.050	62	 3005 000 7013	—	—	—	23 RM3 62	23 RS3 62	23 RD3 62	—	—	23 RM 62	—	23 RS 62
		.063	62	 3005 008 4713	—	—	—	—	—	26 RD3 62	—	—	26 RM 62	—	26 RS 62
				 3005 000 4713	—	—	—	26 RM3 62	—	26 RD3 62	—	—	26 RM 62	—	26 RS 62
	3/8" P	.050	55	 3005 008 4813	63 PM3 55	63 PS3 55	63 PD3 55	—	—	—	63 PM 55	63 PS 55	—	—	—
				 3005 000 4813	63 PM3 55	63 PS3 55	63 PD3 55	—	—	—	63 PM 55	63 PS 55	—	—	—
18	.325"	.050	68	 3005 008 7017	—	—	—	23 RM3 68	23 RS3 68	23 RD3 68	—	—	23 RM 68	—	23 RS 68
		.063	68	 3005 008 4717	—	—	—	—	—	26 RD3 68	—	—	26 RM 68	—	26 RS 68
	3/8" P	.050	61	 3005 000 4817	63 PM3 61	63 PS3 61	63 PD3 61	—	23 RM3 68	—	63 PM 61	63 PS 61	—	—	—
STIHL ROLLOMATIC® E LIGHT															
12	3/8" P	.050	44	 3005 000 7405	63 PM3 44	63 PS3 44	63 PD3 44	—	—	—	63 PM 44	63 PS 44	—	—	—
14	3/8" P	.050	50	 3005 000 7409	63 PM3 50	63 PS3 50	63 PD3 50	—	—	—	63 PM 50	63 PS 50	—	—	—
16	3/8" P	.050	55	 3005 000 7413	63 PM3 55	63 PS3 55	63 PD3 55	—	—	—	63 PM 55	63 PS 55	—	—	—
WOODBOS															
18	.325"	.050	68	 3005 810 7017	—	—	—	23 RM3 68	23 RS3 68	—	—	—	23 RM 68	—	23 RS 68
		 3005 810 4717		—	—	—	—	—	26 RD3 68	—	—	26 RM 68	—	26 RS 68	
CARVING															
12	1/4"	.050	64	 3005 000 3205	—	—	—	—	—	—	—	—	—	13 RMS 64	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1123 640 2007	8	—	—	—
.325"	1143 640 2002	7	1143 007 1003 1143 007 1004	0000 642 1236 0000 642 1234	7 8
3/8" P	1143 640 2000	6	1143 007 1002	0000 642 1240	7

MS 251, MS 251 C |
MS 260, MS 260 C

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Micro™ 3	
STIHL ROLLOMATIC® E						
16	.325"	.063	67	● 3003 008 6813	26 RM3 67	3689 005 0067
18	.325"	.063	74	● 3003 008 6817	26 RM3 74	3689 005 0074
20	.325"	.063	81	● 3003 008 6821	26 RM3 81	3689 005 0081

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E																			
16	.325"	.063	67	 3003 008 6813	—	—	—	26 RM3 67	—	26 RD3 67	—	—	26 RM 67	—	26 RS 67	—	—	—	—
				 3003 000 6813	—	—	—	26 RM3 67	—	26 RD3 67	—	—	26 RM 67	—	26 RS 67	—	—	—	—
	3/16"	.050	60	 3003 000 6313	63 PM3 60	63 PS3 60	63 PD3 60	—	—	—	63 PM 60	63 PS 60	—	—	—	—	—	—	
				 3003 008 8913	—	—	—	33 RM3 60	33 RS3 60	33 RD3 60	—	—	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
	 3003 000 8913	—	—	—	33 RM3 60	33 RS3 60	33 RD3 60	—	—	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60			
18	3/16"	.063	60	 3003 000 6113	—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 008 8917	—	—	—	33 RM3 66	33 RS3 66	33 RD3 66	—	—	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
				 3003 008 6117	—	—	—	36 RM3 66	36 RS3 66	36 RD3 66	—	—	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/16"	.050	72	 3003 008 8921	—	—	—	33 RM3 72	33 RS3 72	33 RD3 72	—	—	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 008 6121	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 5221	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
STIHL ROLLOMATIC® ES																			
16	3/16"	.050	60	 3003 000 8813	—	—	—	33 RM3 60	33 RS3 60	33 RD3 60	—	—	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 001 9413	—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/16"	.050	66	 3003 000 8817	—	—	—	33 RM3 66	33 RS3 66	33 RD3 66	—	—	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
				 3003 000 9417	—	—	—	36 RM3 66	36 RS3 66	36 RD3 66	—	—	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/16"	.050	72	 3003 000 8822	—	—	—	33 RM3 72	33 RS3 72	33 RD3 72	—	—	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 002 9421	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9421	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
STIHL ROLLOMATIC® ES LIGHT																			
20	3/16"	.050	72	 3003 000 2221	—	—	—	33 RM3 72	33 RS3 72	33 RD3 72	—	—	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 000 2021	—	—	—	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
STIHL DUOMATIC® E																			
16	.325"	.050	67	 3003 000 8613	—	—	—	23 RM3 67	—	23 RD3 67	—	—	23 RM 67	—	23 RS 67	—	—	—	—
				 3003 000 8613	—	—	—	33 RM3 60	33 RS3 60	33 RD3 60	—	—	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
	3/16"	.050	60	 3003 001 9213	—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	—	—	—	36 RM3 60	36 RS3 60	36 RD3 60	—	—	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	
18	3/8"	.063	66	 3003 000 9217	—	—	—	36RM366	36RS366	36RD366	—	—	36RM66	—	36RS66	—	36RSK66	36RSL66	36RSLH66	
20	.325"	.050	81	 3003 000 8621	—	—	—	23RM381	—	23RD381	—	—	23RM81	—	23RS81	—	—	—	—	
		.050	72	 3003 000 8621	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72	
	3/8"	.063	72	 3003 001 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	36RS72	—	36RSK72	36RSL72	36RSLH72	
		.063	72	 3003 000 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	36RS72	—	36RSK72	36RSL72	36RSLH72	

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1121 640 2000	7	1121 007 1001	0000 642 1236	7
	1121 640 2004	7	1121 007 1037	0000 642 1236	7
	1121 640 2001	8	1121 007 1002	0000 642 1234	8
	1121 640 2005	8	1121 007 1038	0000 642 1234	8
3/8"	—	—	1121 007 1035	0000 642 1231	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Micro™ 3	
STIHL ROLLOMATIC® E						
16	.325"	.063	67	● 3003 008 6813	26 RM3 67	3689 005 0067
18	.325"	.063	74	● 3003 008 6817	26 RM3 74	3689 005 0074
20	.325"	.063	81	● 3003 008 6821	26 RM3 81	3689 005 0081
STIHL LIGHT O4						
16	.325"	.050	67	● 3003 000 3313	23 RM3 67	3695 005 0067
18	.325"	.050	74	● 3003 008 3317	23 RM3 74	3695 005 0074
20	.325"	.050	81	● 3003 008 3321	23 RM3 81	3695 005 0081

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	
STIHL ROLLOMATIC® E																				
16	.325"	.050	67	 3003 008 6613	—	—	—	23RM367	23RS367	23RD367	—	—	23RM67	—	23RS67	—	—	—	—	
		.063	67	 3003 008 6813	—	—	—	—	—	26RD367	—	—	26RM67	—	26RS67	—	—	—	—	
					 3003 000 6813	—	—	—	26RM367	—	26RD367	—	—	26RM67	—	26RS67	—	—	—	
	3/8"	.050	60	 3003 000 6313	63PM360	63PS360	63PD360	—	—	—	63PM60	63PS60	—	—	—	—	—	—	—	
		.050	60	 3003 008 8913	—	—	—	33RM360	33RS360	33RD360	—	—	33RM60	33RMF60	33RS60	33RSF60	33RSK60	33RSL60	33RSLH60	
					 3003 000 8913	—	—	—	33RM360	33RS360	33RD360	—	—	33RM60	33RMF60	33RS60	33RSF60	33RSK60	33RSL60	33RSLH60
18	.325"	.050	74	 3003 000 6113	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	36RS60	—	36RSK60	36RSL60	36RSLH60	
		.050	66	 3003 008 6617	—	—	—	23RM374	23RS374	23RD374	—	—	23RM74	—	23RS74	—	—	—	—	
					 3003 008 8917	—	—	—	33RM366	33RS366	33RD366	—	—	33RM66	33RMF66	33RS66	33RSF66	33RSK66	33RSL66	33RSLH66
	3/8"	.063	66	 3003 008 6117	—	—	—	36RM366	36RS366	36RD366	—	—	36RM66	—	36RS66	—	36RSK66	36RSL66	36RSLH66	
				 3003 000 6113	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	36RS60	—	36RSK60	36RSL60	36RSLH60	
	20	3/8"	.050	81	 3003 008 6621	—	—	—	23RM381	23RS381	23RD381	—	—	23RM81	—	23RS81	—	—	—	—
.050			72	 3003 008 8921	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72	
.050			72	 3003 008 6121	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	36RS72	—	36RSK72	36RSL72	36RSLH72	
.063			72	 3003 000 5221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	36RS72	—	36RSK72	36RSL72	36RSLH72	
STIHL ROLLOMATIC® ES																				
16	3/8"	.050	60	 3003 000 8813	—	—	—	33RM360	33RS360	33RD360	—	—	33RM60	33RMF60	33RS60	33RSF60	33RSK60	33RSL60	33RSLH60	
		.063	60	 3003 001 9413	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	36RS60	—	36RSK60	36RSL60	36RSLH60	
					 3003 000 9413	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	36RS60	—	36RSK60	36RSL60	36RSLH60
18	3/8"	.050	66	 3003 000 8817	—	—	—	33RM366	33RS366	33RD366	—	—	33RM66	33RMF66	33RS66	33RSF66	33RSK66	33RSL66	33RSLH66	
		.063	66	 3003 000 9417	—	—	—	36RM366	36RS366	36RD366	—	—	36RM66	—	36RS66	—	36RSK66	36RSL66	36RSLH66	
20	3/8"	.050	72	 3003 000 8822	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72	
		.063	72	 3003 002 9421	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	36RS72	—	36RSK72	36RSL72	36RSLH72	
					 3003 000 9421	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	36RS72	—	36RSK72	36RSL72	36RSLH72
STIHL ROLLOMATIC® ES LIGHT																				
20	3/8"	.050	72	 3003 000 2221	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72	
		.063	72	 3003 000 2021	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	36RS72	—	36RSK72	36RSL72	36RSLH72	
STIHL LIGHT O4																				
14	.325"	.050	60	 3003 000 3309				23RM360	23RS360	23RD360			23RM60		23RS60					
16	.325"	.050	67	 3003 000 3313				23RM367	23RS367	23RD367			23RM67		23RS67					
18	.325"	.050	74	 3003 008 3317				23RM374	23RS374	23RD374			23RM74		23RS74					

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL DUROMATIC® E																			
16	.325"	.050	67	 3003 000 8613	—	—	—	23RM367	—	23RD367	—	—	23RM67	—	23RS67	—	—	—	—
		.050	60	 3003 000 8613	—	—	—	33RM360	33RS360	33RD360	—	—	33RM60	33RMF60	33RS60	33RSF60	33RSK60	33RSL60	33RSLH60
	3/8"	.063	60	 3003 001 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	36RS60	—	36RSK60	36RSL60	36RSLH60
		.063	60	 3003 000 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	36RS60	—	36RSK60	36RSL60	36RSLH60
18	3/8"	.063	66	 3003 000 9217	—	—	—	36RM366	36RS366	36RD366	—	—	36RM66	—	36RS66	—	36RSK66	36RSL66	36RSLH66
20	.325"	.050	81	 3003 000 8621	—	—	—	23RM381	—	23RD381	—	—	23RM81	—	23RS81	—	—	—	—
		.050	72	 3003 000 8621	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72
	3/8"	.063	72	 3003 001 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	36RS72	—	36RSK72	36RSL72	36RSLH72
		.063	72	 3003 000 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	36RS72	—	36RSK72	36RSL72	36RSLH72

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1141 640 2001	7	1141 007 1002 1141 007 1003	0000 642 1236 0000 642 1234	7 8
3/8"	1141 640 2003	7	1141 007 1001 1141 007 1007	0000 642 1231 0000 642 1240	7 7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Micro™ 3	
FARMBOSS						
18	.325"	.063	74	● 3003 812 6817	26 RM3 74 3689 005 0074	
20	.325"	.063	81	● 3003 812 6821	26 RM3 81 3689 005 0081	
STIHL ROLLOMATIC® E						
18	.325"	.063	74	● 3003 008 6817	26 RM3 74 3689 005 0074	
20	.325"	.063	81	● 3003 008 6821	26 RM3 81 3689 005 0081	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	.325"	.063	67	 3003 008 6813	26 RM3 67	—	26 RD3 67	26 RM 67	—	26 RS 67	—	—	—	—
				 3003 000 6813	26 RM3 67	—	26 RD3 67	26 RM 67	—	26 RS 67	—	—	—	—
	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
18	.063	60	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
	3/8"	.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
				 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	
			STIHL ROLLOMATIC® ES											
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
	.063	60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	
			18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66
 3003 000 9417	36 RM3 66	36 RS3 66					36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
.063	66	 3003 000 8822		33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	
		20		3/8"	.050	72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—
 3003 002 9421	36 RM3 72		36 RS3 72				36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
.063	72		 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	
			STIHL ROLLOMATIC® ES LIGHT											
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72

MS 261, MS 261 C | MS 270,
MS 270 C, MS 280, MS 280 C

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL DUOMATIC® E														
16	.325"	.050	67	3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—	—
		.050	60	3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
	3/8"	.063	60	3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
		.063	60	3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	.325"	.050	81	3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—	—
		.050	72	3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
	3/8"	.063	72	3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72	3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1121 640 2004	7	1121 007 1037	0000 642 1236	7
	1121 640 2005	8	1121 007 1038	0000 642 1234	8
3/8"	—	—	1121 007 1041	0000 642 1231	7

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL RAPID™ Micro™ 3	
FARMBOSS						
18	.325"	.050	74	● 3003 812 3317	23 RM3 74 3695 005 0074	
18	.325"	.063	74	● 3003 812 6817	26 RM3 74 3689 005 0074	
20	.325"	.050	81	● 3003 812 3321	23 RM3 81 3695 005 0081	
20	.325"	.063	81	● 3003 812 6821	26 RM3 81 3689 005 0081	
STIHL ROLLOMATIC® E						
18	.325"	.063	74	● 3003 008 6817	26 RM3 74 3689 005 0074	
20	.325"	.063	81	● 3003 008 6821	26 RM3 81 3689 005 0081	
STIHL LIGHT 04						
18	.325"	.050	74	● 3003 008 3317	23 RM3 74 3695 005 0074	
20	.325"	.050	81	● 3003 008 3321	23 RM3 81 3695 005 0081	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
FARMBOSS														
16	.325"	.063	67	 3003 813 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				 3003 812 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
18	.325"	.063	74	 3003 812 6817	–	–	26 RD3 74	26 RM 74	–	26 RS 74	–	–	–	–
20	.325"	.063	81	 3003 812 6821	–	–	26 RD3 81	26 RM 81	–	26 RS 81	–	–	–	–
STIHL ROLLOMATIC® E														
16	.325"	.050	67	 3003 008 6613	23 RM3 67	23 RS3 67	23 RD3 67	23 RM 67	–	23 RS 67	–	–	–	–
				 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
		3/8"	.063	67	 3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–
	 3003 008 8913				33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
	.050		60	 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		 3003 000 6113		36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60	
18	.325"	.050	74	 3003 008 6617	23 RM3 74	23 RS3 74	23 RD3 74	23 RM 74	–	23 RS 74	–	–	–	–
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
	3/8"	.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
				 3003 008 6621	23 RM3 81	23 RS3 81	23 RD3 81	23 RM 81	–	23 RS 81	–	–	–	–
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

MS 270, MS 270 C, MS 280, MS 280 C
MS 271, MS 271 C, MS 291, MS 291 C

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
		.063	60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
STIHL DUOMATIC® E														
16	3/8"	.325"	0.50	67	 3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—
		.50	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
			60	 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.325"	0.50	81	 3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—
		.063	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
			72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
			72	 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
STIHL LIGHT O4														
14	.325"	0.50	60	 3003 000 3309	23 RM3 60	23 RS3 60	23 RD3 60	23 RM 60		23 RS 60				
16	.325"	0.50	67	 3003 000 3313	23 RM3 67	23 RS3 67	23 RD3 67	23 RM 67		23 RS 67				
18	.325"	0.50	74	 3003 008 3317	23 RM3 74	23 RS3 74	23 RD3 74	23 RM 74		23 RS 74				

CHAIN SPROCKETS

 Chain pitch (inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1141 640 2001	7	—	—	—
3/8"	1141 640 2003	7	—	—	—

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Micro™ 3	
FARMBOSS						
18	.325"	.063	74	● 3003 812 6817	26 RM3 74 3689 005 0074	
20	.325"	.063	81	● 3003 812 6821	26 RM3 81 3689 005 0081	
STIHL ROLLOMATIC® E						
18	.325"	.063	74	● 3003 008 6817	26 RM3 74 3689 005 0074	
20	.325"	.063	81	● 3003 008 6821	26 RM3 81 3689 005 0081	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL RAPID™ Micro™ 3	● STIHL RAPID™ Super 3	● STIHL RAPID™ Duro 3	● STIHL RAPID™ Micro™	● STIHL RAPID™ Micro™ F	● STIHL RAPID™ Super	● STIHL RAPID™ Super F	● STIHL RAPID™ Super K	● STIHL RAPID™ Super L	● STIHL RAPID™ Super LH
FARMBOSS														
16	.325"	.063	67	● 3003 813 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				● 3003 812 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
18	.325"	.063	74	● 3003 812 6817	26 RM3 74	–	26 RD3 74	26 RM 74	–	26 RS 74	–	–	–	–
20	.325"	.063	81	● 3003 812 6821	26 RM3 81	–	26 RD3 81	26 RM 81	–	26 RS 81	–	–	–	–
STIHL ROLLOMATIC® E														
16	.325"	.050	67	● 3003 008 6613	23 RM3 67	23 RS3 67	23 RD3 67	23 RM 67	–	23 RS 67	–	–	–	–
				● 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				● 3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
	3/8"	.063	67	● 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				● 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				● 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	.325"	.050	74	● 3003 008 6617	23 RM3 74	23 RS3 74	23 RD3 74	23 RM 74	–	23 RS 74	–	–	–	–
				● 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
	3/8"	.063	66	● 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
				● 3003 008 6621	23 RM3 81	23 RS3 81	23 RD3 81	23 RM 81	–	23 RS 81	–	–	–	–
20	.325"	.050	72	● 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				● 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
	3/8"	.063	72	● 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				● 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
25	3/8"	.063	84	● 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84

MS 271, MS 271 C, MS 291,
MS 291 C | MS 290

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL DUROMATIC® E														
16	3/8"	.325"	67	 3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—	—
		.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.325"	81	 3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—	—
		.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
.325"	1125 640 2005	7	1125 007 1001	0000 642 1236	7
	1125 640 2008	8	1125 007 1000	0000 642 1234	8
3/8"	1125 640 2004	7	1125 007 1002	0000 642 1231	7

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
FARMBOSS														
16	.325"	.063	67	 3003 813 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				 3003 812 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
18	.325"	.063	74	 3003 812 6817	26 RM3 74	–	26 RD3 74	26 RM 74	–	26 RS 74	–	–	–	–
20	.325"	.063	81	 3003 812 6821	26 RM3 81	–	26 RD3 81	26 RM 81	–	26 RS 81	–	–	–	–
STIHL ROLLOMATIC® E														
16	.325"	.063	67	 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				 3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
18	.325"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
	3/8"	.050	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
				 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
20	3/8"	.063	72	 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
			72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
		.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
25	3/8"	.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
			84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL DUROMATIC® E														
16	3/8"	.325"	67	 3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—	—
		.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.325"	81	 3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—	—
		.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
.325"	1125 640 2005	7	1125 007 1001	0000 642 1236	7
	1125 640 2008	8	1125 007 1000	0000 642 1234	8
3/8"	1125 640 2004	7	1125 007 1002	0000 642 1231	7

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS												
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3	 STIHL RAPID™ Duro Special
STIHL ROLLOMATIC® E																	
16	3/8"	.063	67	 3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–	–	–	–
				 3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–	–	–	–
		.050	60	 3003 008 8913	33 RM3 60	–	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RH 60	33 RH3 60	–
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RH 60	33 RH3 60	–
18	3/8"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 66	36 RH3 66	–
				 3003 008 8917	33 RM3 66	–	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RH 66	33 RH3 66	–
		.050	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66	36 RH 66	36 RH3 66	–
				 3003 008 8921	33 RM3 72	–	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72	–
20	3/8"	.050	72	 3003 008 8921	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	–
				 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	–
		.063	72	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84	–
				 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84	–
STIHL ROLLOMATIC® ES																	
16	3/8"	.063	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RH 60	33 RH3 60	–
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60	–
		.050	60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60	–
				 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RH 66	33 RH3 66	–
18	3/8"	.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66	36 RH 66	36 RH3 66	–
				 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72	–
		.050	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	–
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	–
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76	36 RH 76	36 RH3 76	–
				 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84	–
		.050	84	 3003 000 4030	33 RM3 84	–	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84	–
				 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS												
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super-K	 STIHL RAPID™ Super-L	 STIHL RAPID™ Super-LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3	 STIHL RAPID™ Duro Spezial
STIHL ROLLOMATIC® ES LIGHT																	
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72	—
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	—
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84	—
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84	—
STIHL DUROMATIC® E																	
16	3/8"	.325"	67	 3003 000 8613	23 RM3 67	—	23 RD3 67	23 RM 67	—	23 RS 67	—	—	—	—	—	—	—
		.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RH 60	33 RH3 60	—
	3/8"	.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60	—
		.063	60	 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60	—
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66	36 RH 66	36 RH3 66	—
20	3/8"	.325"	81	 3003 000 8621	23 RM3 81	—	23 RD3 81	23 RM 81	—	23 RS 81	—	—	—	—	—	—	—
		.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72	—
	3/8"	.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	—
		.063	72	 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	—
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84	—
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84	—
STIHL LIGHT O4																	
14	3/8"	.063	54	 3003 000 7709	—	—	—	—	—	26 RS 67	—	—	—	—	36 RH 54	36 RH3 54	36 RDR 54
16	3/8"	.063	60	 3003 000 7713	36 RM3 60	—	—	—	—	36 RS 60	—	—	—	—	36 RH 60	36 RH3 60	—
18	.325"	.063	66	 3003 008 7717	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	—	—	36 RH 66	36 RH3 66	36 RDR 66
20	.325"	.063	72	 3003 000 7721	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	—	36 RSL 72	—	36 RH 72	36 RH3 72	36 RDR 72

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
.325"	—	—	1125 007 1000 1125 007 1001	0000 642 1234 0000 642 1236	8 7
3/8"	1140 640 2000	7	1125 007 1002	0000 642 1231	7

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60		
		 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60		
18	3/8"	.050	66	3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66		
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72		
		 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72		
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84		
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60		
		 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60		
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66		
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72		
		 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72		
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84		
		 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84		
STIHL ROLLOMATIC® ES LIGHT														

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL DUROMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8"	1125 640 2006	7	1125 007 1041	0000 642 1223	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	.325"	.063	68	 3003 008 6813	26 RM3 68	–	26 RD3 68	26 RM 68	–	26 RS 68	–	–	–	–
				 3003 000 6813	26 RM3 68	–	26 RD3 68	26 RM 68	–	26 RS 68	–	–	–	–
	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
18	3/8"	.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
	.050	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66	
			 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	
20	3/8"	.063	72	 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	
			 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85	
25	3/8"	.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
				 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
				 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
25	3/8"	.050	84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL DUROMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
				 3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	—	—	1128 007 1011	0000 642 1239	9
3/8"	—	—	1128 007 1000	0000 642 1223	7
			1135 007 1002	0000 642 1223	7
			1128 007 1001	0000 642 1216	8

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3
STIHL ROLLOMATIC® E																
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84
		.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85	33 RH 60	36 RH3 60
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84		
STIHL ROLLOMATIC® ES																
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RH 60	33 RH3 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60
			60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RH 66	33 RH3 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66	36 RH 66	36 RH3 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72		
			72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76	36 RH 76	36 RH3 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84
		.050	84	 3003 000 4030	33 RM3 84	—	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84
STIHL ROLLOMATIC® ES LIGHT																
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS												
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super-K	 STIHL RAPID™ Super-L	 STIHL RAPID™ Super-LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3	 STIHL RAPID™ Duro Spezial
STIHL DUOMATIC® E																	
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RH 60	33 RH3 60	
		.063	60	 3003 001 9213  3003 000 9213	36 RM3 60 36 RM3 60	36 RS3 60 36 RS3 60	36 RD3 60 36 RD3 60	36 RM 60 36 RM 60	— 36 RS 60	— 36 RS 60	36 RSK 60 36 RSK 60	36 RSL 60 36 RSL 60	36 RSLH 60 36 RSLH 60	36 RH 60 36 RH 60	36 RH3 60 36 RH3 60		
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66	36 RH 66	36 RH3 66	
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72	
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	
			 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72		
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84	
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84	
			85	 3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85			
STIHL LIGHT O4																	
14	3/8"	.063	54	 3003 000 7709	—	—	—	—	—	26 RS 67	—	—	—	—	36 RH 54	36 RH3 54	36 RDR 54
16	3/8"	.063	60	 3003 000 7713	36 RM3 60	—	—	—	—	36 RS 60	—	—	—	—	36 RH 60	36 RH3 60	—
18	.325"	.063	66	 3003 008 7717	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	—	—	36 RH 66	36 RH3 66	36 RDR 66
20	.325"	.063	72	 3003 000 7721	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	—	36 RSL 72	—	36 RH 72	36 RH3 72	36 RDR 72

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
.325"	—	—	1140 007 2502	0000 642 1239	9
			1128 007 1011	0000 642 1239	9
			1140 007 2500	0000 642 1223	7
			1128 007 1000	0000 642 1223	7
3/8"	—	—	1135 007 1002	0000 642 1223	7
			1140 007 2501	0000 642 1216	8
			1128 007 1001	0000 642 1216	8

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3
STIHL ROLLOMATIC® E																
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72
		.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84
		.063	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85		
25	3/8"	.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84
		STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RH 60	33 RH3 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60
			60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RH3 66	33 RH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66	36 RH 66	36 RH3 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72		
			72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76	36 RH 76	36 RH3 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84
			84	 3003 000 4030	33 RM3 84	36 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84
STIHL ROLLOMATIC® ES LIGHT																
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS											
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3
STIHL DUOMATIC® E																
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RH 60	33 RH3 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60
		 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60		
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66	36 RH 66	36 RH3 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72
		 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72		
		 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72		
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84
		 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84		
		 3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85	—	—		
STIHL LIGHT O4																
14	3/8"	.063	54	 3003 000 7709	—	—	—	—	—	—	—	—	—	—	36 RH 54	36 RH3 54
16	3/8"	.063	60	 3003 000 7713	—	—	—	—	—	—	—	—	—	—	36 RH 60	36 RH3 60
18	.325"	.063	66	 3003 008 7717	—	—	—	—	—	—	—	—	—	—	36 RH 66	36 RH3 66
20	.325"	.063	72	 3003 000 7721	—	—	—	—	—	—	—	—	—	—	36 RH 72	36 RH3 72

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	—	—	1140 007 2502	0000 642 1239	9
			1128 007 1011	0000 642 1239	9
			1140 007 2500	0000 642 1223	7
			1128 007 1000	0000 642 1223	7
3/8"	—	—	1135 007 1002	0000 642 1223	7
			1140 007 2501	0000 642 1216	8
			1128 007 1001	0000 642 1216	8

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60 3624 005 0060	–
STIHL ROLLOMATIC® ES						
16	3/8"	.050	60	3003 000 8813	33 RS3 60 3624 005 0060	33 RS 60 3623 005 0060
18	3/8"	.050	66	3003 000 8817	33 RS3 66 3624 005 0066	33 RS 66 3623 005 0066
20	3/8"	.050	72	3003 000 8822	33 RS3 72 3624 005 0072	33 RS 72 3623 005 0072
25	3/8"	.050	84	3003 000 8830	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084
				3003 000 4030	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.063	60	 3003 000 5213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 5217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
			60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
			72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.050	84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
			.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	–	36 RS 91	–	36 RSK 91	36 RSL 91	36 RSLH 91
			92	 3003 000 6038	36 RM3 92	36 RS3 92	36 RD3 92	36 RM 92	–	36 RS 92	–	36 RSK 92	36 RSL 92	36 RSLH 92
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	–	36 RS 98	–	36 RSK 98	36 RSL 98	36 RSLH 98
32	3/8"	.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	–	36 RS 105	–	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	–	36 RS 114	–	36 RSK 114	36 RSL 114	36 RSLH 114

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS												
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3	
STIHL ROLLOMATIC® ES LIGHT																	
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72	
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84	
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84	
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91	33 RH 91	33 RH3 91	
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91	36 RH 91	36 RH3 91	
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RH 105	33 RH3 105	
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105	36 RH 105	36 RH3 105	
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114	33 RH 114	33 RH3 114	
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114	36 RH 114	36 RH3 114	
STIHL ROLLOMATIC® E																	
18	.325"	.063	75	 3003 008 6817	26 RM3 75	—	26 RD3 75	26 RM 75	—	26 RS 75	—	—	—	—	—	—	
20	.325"	.063	82	 3003 008 6821	26 RM3 82	—	26 RD3 82	26 RM 82	—	26 RS 82	—	—	—	—	—	—	
STIHL DUOMATIC® E																	
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RH 60	33 RH3 60	
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60	
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60	36 RH 60	36 RH3 60	
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66	36 RH 66	36 RH3 66	
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RH 72	33 RH3 72	
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72	36 RH 72	36 RH3 72	
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RH 84	33 RH3 84	
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84	36 RH 84	36 RH3 84	
				 3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85			

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	—	—	1128 007 1011	0000 642 1239	9
3/8"	1128 640 2000	7	1128 007 1000	0000 642 1223	7
	1128 640 2005	8	1128 007 1001	0000 642 1216	8

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60 3624 005 0060	–
STIHL ROLLOMATIC® ES						
16	3/8"	.050	60	3003 000 8813	33 RS3 60 3624 005 0060	33 RS 60 3623 005 0060
18	3/8"	.050	66	3003 000 8817	33 RS3 66 3624 005 0066	33 RS 66 3623 005 0066
20	3/8"	.050	72	3003 000 8822	33 RS3 72 3624 005 0072	33 RS 72 3623 005 0072
25	3/8"	.050	84	3003 000 8830	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084
				3003 000 4030	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.063	60	 3003 000 5213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 5217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	–	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	–	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	–	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	–	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	–	36 RS 91	–	36 RSK 91	36 RSL 91	36 RSLH 91
				 3003 000 6038	36 RM3 92	36 RS3 92	36 RD3 92	36 RM 92	–	36 RS 92	–	36 RSK 92	36 RSL 92	36 RSLH 92
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	–	36 RS 98	–	36 RSK 98	36 RSL 98	36 RSLH 98
32	3/8"	.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	–	36 RS 105	–	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	–	36 RS 114	–	36 RSK 114	36 RSL 114	36 RSLH 114

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL DUROMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
				 3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	—	—	1128 007 1000	0000 642 1223	7
	—	—	1128 007 1001	0000 642 1216	8

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 008 8913	33 RS3 60 3624 005 0060	—
STIHL ROLLOMATIC® ES						
16	3/8"	.050	60	3003 000 8813	33 RS3 60 3624 005 0060	33 RS 60 3623 005 0060
18	3/8"	.050	66	3003 000 8817	33 RS3 66 3624 005 0066	33 RS 66 3623 005 0066
20	3/8"	.050	72	3003 000 8822	33 RS3 72 3624 005 0072	33 RS 72 3623 005 0072
25	3/8"	.050	84	3003 000 8830	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084
				3003 000 4030	33 RS3 84 3624 005 0084	33 RS 84 3623 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.063	60	 3003 000 5213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 5217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
				 3003 000 6038	36 RM3 92	36 RS3 92	36 RD3 92	36 RM 92	—	36 RS 92	—	36 RSK 92	36 RSL 92	36 RSLH 92
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	—	36 RS 98	—	36 RSK 98	36 RSL 98	36 RSLH 98
32	3/8"	.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL ROLLOMATIC® ES LIGHT														

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL ROLLOMATIC® E														
18	.325"	.063	75	 3003 008 6817	26 RM3 75	—	26 RD3 75	26 RM 75	—	26 RS 75	—	—	—	—
20	.325"	.063	82	 3003 008 6821	26 RM3 82	—	26 RD3 82	26 RM 82	—	26 RS 82	—	—	—	—
STIHL DUOMATIC® E														
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
			60	 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
			72	 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
			85	 3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1128 640 2000 1128 640 2005	7 8	1128 007 1000 1128 007 1001	0000 642 1223 0000 642 1216	7 8

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Duro Rescue	STIHL RAPID™ Super		
STIHL ROLLOMATIC® E									
16	3/8"	.050	60	3003 000 8913	33 RS3 60 3624 005 0060	–	–		
STIHL ROLLOMATIC® ES									
16	3/8"	.050	60	3003 000 8813	33 RS3 60 3624 005 0060	–	33 RS 60 3623 005 0060		
18	3/8"	.050	66	3003 000 8817	33 RS3 66 3624 005 0066	–	33 RS 66 3623 005 0066		
20	3/8"	.050	72	3003 000 8822	33 RS3 72 3624 005 0072	–	33 RS 72 3623 005 0072		
		.063	72	3003 002 9421	36 RS3 72 3626 005 0072	36 RDR 72 3944 005 0072	36 RS 72 3621 000 0072		
25	3/8"	.050	84	3003 000 8830	33 RS3 84 3624 005 0084	–	33 RS 84 3623 005 0084		

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.063	60	 3003 000 5213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	 3003 000 5217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	–	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	–	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	–	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
			 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72	
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	–	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
			84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
			84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	–	36 RS 91	–	36 RSK 91	36 RSL 91	36 RSLH 91
			92	 3003 000 6038	36 RM3 92	36 RS3 92	36 RD3 92	36 RM 92	–	36 RS 92	–	36 RSK 92	36 RSL 92	36 RSLH 92
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	–	36 RS 98	–	36 RSK 98	36 RSL 98	36 RSLH 98
32	3/8"	.050	105	 3003 000 8846	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 6046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	–	36 RS 105	–	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 8853	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 6053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	–	36 RS 114	–	36 RSK 114	36 RSL 114	36 RSLH 114

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91
32	3/8"	.050	105	 3003 000 2246	33 RM3 105	33 RS3 105	33 RD3 105	33 RM 105	33 RMF 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	36 RD3 105	36 RM 105	—	36 RS 105	—	36 RSK 105	36 RSL 105	36 RSLH 105
36	3/8"	.050	114	 3003 000 2253	33 RM3 114	33 RS3 114	33 RD3 114	33 RM 114	33 RMF 114	33 RS 114	33 RSF 114	33 RSK 114	33 RSL 114	33 RSLH 114
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
STIHL ROLLOMATIC® E														
18	.325"	.063	75	 3003 008 6817	26 RM3 75	—	26 RD3 75	26 RM 75	—	26 RS 75	—	—	—	—

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	—	—	1128 007 1019	0000 642 1239	9
3/8"	1128 640 2003	7	1128 007 1017	0000 642 1223	7
	1128 640 2004	8	1128 007 1018	1128 007 1018	8

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Duro Rescue	STIHL RAPID™ Super		
STIHL ROLLOMATIC® ES									
16	3/8"	.050	60	3003 000 8813	33 RS3 60 3624 005 0060	—	33 RS 60 3623 005 0060		
18	3/8"	.050	66	3003 000 8817	33 RS3 66 3624 005 0066	—	33 RS 66 3623 005 0066		
20	3/8"	.050	72	3003 000 8822	33 RS3 72 3624 005 0072	—	33 RS 72 3623 005 0072		
		.063	72	3003 002 9421	36 RS3 72 3626 005 0072	36 RDR 72 3944 005 0072	36 RS 72 3621 000 0072		
25	3/8"	.050	84	3003 000 4030	33 RS3 84 3624 005 0084	—	33 RS 84 3623 005 0084		

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LF	 STIHL RAPID™ Super LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3		
STIHL ROLLOMATIC® E																			
16	3/8"	.063	60	 3003 000 5213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	—	36 RSLH 60	36 RH 60	36 RH3 60		
18	3/8"	.063	66	 3003 000 5217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	—	36 RSLH 66	36 RH 66	36 RH3 66		
20	3/8"	.063	72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	—	36 RSLH 72	36 RH 72	36 RH3 72		
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	—	33 RSLH 84	33 RH 84	33 RH3 84		
		.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	—	33 RSLH 85				
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	—	36 RSLH 84	36 RH 84	36 RH3 84		
STIHL ROLLOMATIC® ES																			
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	—	33 RSF 60	33 RSK 60	33 RSL 60	—	33 RSLH 60	33 RH 60	33 RH3 60		
		 3003 001 9413	60	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	—	36 RSLH 60	36 RH 60	36 RH3 60			
			 3003 000 9413	60	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	—	36 RSLH 60	36 RH 60	36 RH3 60		
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	—	33 RSF 66	33 RSK 66	33 RSL 66	—	33 RSLH 66	33 RH 66	33 RH3 66		
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	—	36 RSLH 66	36 RH 66	36 RH3 66		
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	—	33 RSF 72	33 RSK 72	33 RSL 72	—	33 RSLH 72	33 RH 72	33 RH3 72		
		 3003 002 9421	72	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	—	36 RSLH 72	36 RH 72	36 RH3 72			
			 3003 000 9421	72	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	—	36 RSLH 72				
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76	36 RSL 76	—	36 RSLH 76	36 RH 76	36 RH3 76		
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	—	33 RSF 84	33 RSK 84	33 RSL 84	—	33 RSLH 84	33 RH 84	33 RH3 84		
			84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	—	33 RSLH 84	33 RH 84	33 RH3 84		
		.063	84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	—	36 RSLH 84	36 RH 84	36 RH3 84		
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	—	33 RSLH 91	33 RH 91	33 RH3 91		
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	—	36 RSLH 91	36 RH 91	36 RH3 91		
			92	 3003 000 6038	36 RM3 92	36 RS3 92	36 RD3 92	36 RM 92	—	36 RS 92	—	36 RSK 92	36 RSL 92	—	36 RSLH 92				
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	36 RD3 98	36 RM 98	—	36 RS 98	—	36 RSK 98	36 RSL 98	—	36 RSLH 98	36 RH 98	36 RH3 98		

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS						SAW CHAINS												
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number		STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LF	STIHL RAPID™ Super LH	STIHL RAPID™ HEXA	STIHL RAPID™ HEXA 3
STIHL ROLLOMATIC® ES LIGHT																		
20	3/8"	.050	72	3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	—	33 RSLH 72	33 RH 72	33 RH3 72	
		.063	72	3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	—	36 RSLH 72	36 RH 72	36 RH3 72	
25	3/8"	.050	84	3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	—	33 RSLH 84	33 RH 84	33 RH3 84	
		.063	84	3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	—	36 RSLH 84	36 RH 84	36 RH3 84	
28	3/8"	.050	91	3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	—	33 RSLH 91	33 RH 91	33 RH3 91	
		.063	91	3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	—	36 RSLH 91	36 RH 91	36 RH3 91	
32	3/8"	.050	105	3003 000 2246	—	33 RS3 105	—	—	—	33 RS 105	33 RSF 105	—	—	—	33 RSLH 105	33 RH 105	33 RH3 105	
		.063	105	3003 000 2046	36 RM3 105	36 RS3 105	—	—	—	36 RS 105	—	—	—	36 RSLF 105	—	36 RH 105	36 RH3 105	
36	3/8"	.050	114	3003 000 2253	—	33 RS3 114	—	—	—	33 RS 114	33 RSF 114	—	—	—	33 RSLF 114	—	33 RH 114	33 RH3 114
		.063	114	3003 000 2053	36 RM3 114	36 RS3 114	36 RS3 114	—	—	36 RS 114	—	—	—	36 RSLF 114	36 RSLH 114	36 RH 114	36 RH3 114	

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1128 640 2003 1128 640 2004	7 8	1128 007 1017 1128 007 1018	0000 642 1223 1128 007 1018	7 8

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super	STIHL RAPID™ Super 3
STIHL ROLLOMATIC® ES						
16	3/8"	.050	60	3003 000 8813	33 RS 60 3623 005 0060	-
18	3/8"	.050	66	3003 000 8817	33 RS 66 3623 005 0066	-
20	3/8"	.050	72	3003 000 8822	33 RS 72 3623 005 0072	-
25	3/8"	.050	84	3003 000 4030	-	33 RS3 84 3624 005 0084
				3003 000 8830	33 RS 84 3623 005 0084	-
28	3/8"	.050	91	3003 000 8838	33 RS 91 3623 005 0091	-
30	3/8"	.050	98	3003 000 6041	33 RS 98 3623 005 0098	-
STIHL ROLLOMATIC® ES LIGHT						
25	3/8"	.050	84	3003 000 2231	33 RS 84 3623 005 0084	-
28	3/8"	.050	91	3003 000 2238	33 RS 91 3623 005 0091	-
32	3/8"	.050	105	3003 000 2246	33 RS 105 3623 005 0105	-
36	3/8"	.050	114	3003 000 2253	33 RS 114 3623 005 0114	-

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS													
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super F	 STIHL RAPID™ Super	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Duro R	 STIHL RAPID™ Super LF	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3
STIHL DUOMATIC®																		
16	3/8"	.050	60	 3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RSF 60	33 RS 60	33 RSK 60	33 RSL 60	33 RSLH 60	–	–	–	33 RH 60	33 RH3 60
		.063	60	 3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	36 RSK 60	36 RSL 60	–	–	–	–	36 RH 60	36 RH3 60
				 3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	36 RSK 60	36 RSL 60	–	–	–	–	36 RH 60	36 RH3 60
18	3/8"	.063	66	 3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	–	–	–	–	36 RSLF 66	36 RH 66	36 RH3 66
20	3/8"	.050	72	 3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RSF 72	33 RS 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RMF 72	–	33 RSLF 72	33 RH 72	33 RH3 72
		.063	72	 3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	–	36 RSL 72	–	36 RDR 72	36 RSLF 72	36 RH 72	36 RH3 72
				 3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	–	36 RSL 72	–	36 RDR 72	36 RSLF 72	36 RH3 72	36 RH 72
25	3/8"	.050	84	 3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 72	33 RM 84	33 RSF 84	33 RS 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RMF 84	–	33 RSLF 84	33 RH 84	33 RH3 84
		.063	84	 3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSL 84	36 RSLH 84	–	–	36 RSLF 84	36 RH 84	36 RH3 84
				 3003 002 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSL 84	36 RSLH 84	–	–	36 RSLF 84	36 RH 84	36 RH3 84
30	3/8"	.063	96	 3003 001 9241	–	–	–	–	–	36 RS 96	–	–	–	–	–	–	–	–
STIHL ROLLOMATIC® E																		
16	3/8"	.050	60	 3003 000 7813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RSF 60	33 RS 60	–	–	–	33 RMF 60	–	–	33 RH 60	33 RH3 60
				 3003 008 8913	–	33 RS3 60	–	–	33 RSF 60	33 RS 60	–	–	–	–	–	–	–	–
				 3003 000 8913	–	33 RS3 60	–	–	33 RSF 60	33 RS 60	–	–	–	–	–	–	–	–
		.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	–	–	36 RS 60	–	–	–	–	–	–	–	–
				 3003 000 5213	36 RM3 60	36 RS3 60	36 RD3 60	–	–	36 RS 60	–	–	–	–	–	–	–	36 RH 60
18	3/8"	.050	66	 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RSF 66	33 RS 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RMF 66	–	33 RSLF 66	33 RH 66	33 RH3 66
		.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	–	–	36 RS 66	–	–	–	–	–	36 RSLF 66	36 RH 66	36 RH3 66
				 3003 000 5217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	–	–	–	–	36 RSLF 66	–	–

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super F	 STIHL RAPID™ Super	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Duro R	 STIHL RAPID™ Super LF	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3	
20	3/8"	.050	72	 3003 008 8921	—	36 RS3 72	—	—	36 RSF 72	36 RS 72	—	—	—	—	—	36 RSLF 72	—	—	
		.063	72	 3003 008 6121  3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	—	—	36 RS 72	—	—	—	—	—	—	—	—	
25	3/8"	.050	84	 3003 000 7831	33 RM3 84	33 RS3 4	33 RD3 84	33 RM 84	33 RSF 84	33 RS 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RMF 84	—	33 RSLF 84	33 RH 84	33 RH3 84	
		.063	84	 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSL 84	36 RSLH 84	—	—	36 RSLF 84	36 RH 84	36 RH3 84	
STIHL ROLLOMATIC® ES																			
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RSF 60	33 RS 60	33 RSK 60	33 RSL 60	33 RSLH 60	—	—	—	—	33 RH 60	33 RH3 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	36 RSF 60	36 RS 60	—	—	—	—	—	—	—	36 RH 60	36 RH3 60
			 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	36 RSF 60	36 RS 60	—	—	—	—	—	—	—	—	36 RH 60	36 RH3 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RSF 66	33 RS 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RMF 66	—	33 RSLF 66	33 RH 66	33 RH3 66	
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	—	—	—	—	36 RSLF 66	36 RH 66	36 RH3 66	
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RSF 72	33 RS 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RMF 72	—	33 RSLF 72	33 RH 72	33 RH3 72	
		.063	72	 3003 002 9421  3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	36 RSF 72	36 RS 72	—	36 RSL 72	—	—	36 RDR 72	—	—	—	
22	3/8"	.063	76	 3003 000 9425	—	—	—	—	—	36 RS 76	—	—	—	—	—	—	—	—	
		.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RSF 84	36 RS 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RMF 84	—	33 RSLF 84	33 RH 84	33 RH3 84	
 3003 000 4030	.063		84	 3003 000 9431	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 83	33 RSF 84	33 RS 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RMF 84	—	33 RSLF 84	—	—	
			 3003 001 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSL 84	36 RSLH 84	—	—	36 RSLF 84	36 RH 84	36 RH3 84		
28	3/8"	.050	91	 3003 000 8838	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RSF 91	33 RS 91	33 RSK 91	33 RSL 91	33 RSLH 91	33 RMF 91	—	33 RSLF 91	33 RH 91	33 RH3 91	
		.063	91	 3003 000 6038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSL 91	—	—	—	36 RSLF 91	36 RH 91	36 RH3 91	
30	3/8"	.063	98	 3003 000 6041	36 RM3 98	36 RS3 98	—	36 RM 98	—	36 RS 98	—	—	—	—	—	36 RSLF 98	36 RH 98	36 RH3 98	
		 3003 001 6041	36 RM3 98	36 RS3 98	—	36 RM 98	—	36 RS 98	—	—	—	—	—	—	—	36 RSLF 98	36 RH 98	36 RH3 98	
32	3/8"	.050	105	 3003 000 8846	—	33 RS3 105	—	33 RM 105	33 RSF 105	33 RS 105	—	—	—	—	—	33 RSLF 105	33 RH 105	33 RH3 105	
36	3/8"	.050	114	 3003 000 8853	—	33 RS3 114	—	—	33 RSF 114	33 RS 114	—	—	—	—	—	33 RSLF 114	33 RH 114	33 RH3 114	
STIHL ROLLOMATIC® ES LIGHT																			
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RSF 72	33 RS 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RMF 72	—	33 RSLF 72	33 RH 72	33 RH3 72	
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSL 72	—	—	36 RDR 72	36 RSLF 72	36 RH 72	36 RH3 72	
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RSF 84	33 RS 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RMF 84	—	33 RSLF 84	33 RH 84	33 RH3 84	
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	36 RSF 84	36 RS 84	—	36 RSL 84	36 RSLH 84	—	—	36 RSLF 84	36 RH 84	36 RH3 84	
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	—	33 RM 91	33 RSF 91	33 RS 91	33 RSK 91	33 RSL 91	33 RSLH 91	33 RMF 91	—	33 RSLF 91	33 RH 91	33 RH3 91	
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSL 91	—	—	—	36 RSLF 91	36 RH 91	36 RH3 91	
32	3/8"	.050	105	 3003 000 2246	—	33 RS3 105	—	—	33 RSF 105	33 RS 105	—	—	33 RSLH 105	—	—	—	33 RH 105	33 RH3 105	
		.063	105	 3003 000 2046	36 RM3 105	36 RS3 105	—	—	—	36 RS 105	—	—	—	—	—	36 RSLF 105	36 RH 105	36 RH3 105	
36	3/8"	.050	114	 3003 000 2253	—	33 RS3 114	—	—	33 RSF 114	33 RS 114	—	—	—	—	—	33 RSLF 114	33 RH 114	33 RH3 114	
		.063	114	 3003 000 2053	36 RM3 114	36 RS3 114	36 RD3 114	—	—	36 RS 114	—	—	36 RSLH 114	—	—	36 RSLF 114	36 RH 114	36 RH3 114	

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8"			1128 007 1017	0000 642 1223	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	3003 000 8913	33 RS360 3624 005 0060	—
STIHL ROLLOMATIC® ES						
16	3/8"	.050	60	3003 000 8813	33 RS360 3624 005 0060	33 RS 60 3623 005 0060
18	3/8"	.050	66	3003 000 8817	33 RS366 3624 005 0066	33 RS 66 3623 005 0066
20	3/8"	.050	72	3003 000 8822	33 RS372 3624 005 0072	33 RS 72 3623 005 0072
25	3/8"	.050	84	3003 000 8830	33 RS384 3624 005 0084	33 RS 84 3623 005 0084
				3003 000 4030	33 RS384 3624 005 0084	33 RS 84 3623 005 0084
STIHL ROLLOMATIC® ES LIGHT						
28	3/8"	.050	91	3003 000 2238	33 RS391 3624 005 0091	33 RS 91 3623 005 0091
32	3/8"	.050	105	3003 000 2246	33 RS3105 3624 005 0105	0105 33 RS105 3623 005
36	3/8"	.050	114	3003 000 2253	33 RS3114 3624 005 0114	0114 33 RS114 3623 005

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS																
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E																					
16	3/8"	.063	60	 3003 000 5213	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60
18	3/8"	.063	66	 3003 000 5217	—	—	—	36 RM366	36 RS366	36 RD366	—	—	36 RM66	—	—	—	36 RS66	—	36 RSK66	36 RSL66	36 RSLH66
20	3/8"	.063	72	 3003 000 5221	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72
25	3/8"	.050	85	 3003 000 7831	—	—	—	33 RM385	33 RS385	33 RD385	—	—	33 RM85	33 RMF85	—	—	33 RS85	33 RSF85	33 RSK85	33 RSL85	33 RSLH85
		.050	84	 3003 000 7831	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84
		.063	84	 3003 000 5231	—	—	—	36 RM384	36 RS384	36 RD384	—	—	36 RM84	—	—	—	36 RS84	—	36 RSK84	36 RSL84	36 RSLH84
STIHL ROLLOMATIC® ES																					
16	3/8"	.050	60	 3003 000 8813	—	—	—	33 RM360	33 RS360	33 RD360	—	—	33 RM60	33 RMF60	—	—	33 RS60	33 RSF60	33 RSK60	33 RSL60	33 RSLH60
		.063	60	 3003 001 9413	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60
			60	 3003 000 9413	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60
18	3/8"	.050	66	 3003 000 8817	—	—	—	33 RM366	33 RS366	33 RD366	—	—	33 RM66	33 RMF66	—	—	33 RS66	33 RSF66	33 RSK66	33 RSL66	33 RSLH66
		.063	66	 3003 000 9417	—	—	—	36 RM366	36 RS366	36 RD366	—	—	36 RM66	—	—	—	36 RS66	—	36 RSK66	36 RSL66	36 RSLH66
20	3/8"	.050	72	 3003 000 8822	—	—	—	33 RM372	33 RS372	33 RD372	—	—	33 RM72	33 RMF72	—	—	33 RS72	33 RSF72	33 RSK72	33 RSL72	33 RSLH72
		.063	72	 3003 000 9421	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72
			72	 3003 002 9421	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72
		.404"	66	 3003 000 9721	—	—	—	—	—	—	—	—	46 RM66	46 RMF66	46 RMH66	46 RMK66	46 RS66	46 RSF66	—	—	46 RSLH66
22	3/8"	.063	76	 3003 000 9425	—	—	—	36 RM376	36 RS376	36 RD376	—	—	36 RM76	—	—	—	36 RS76	—	36 RSK76	36 RSL76	36 RSLH76
25	3/8"	.050	84	 3003 000 8830	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84
		.063	84	 3003 000 4030	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84
			84	 3003 000 9431	—	—	—	36 RM384	36 RS384	36 RD384	—	—	36 RM84	—	—	—	36 RS84	—	36 RSK84	36 RSL84	36 RSLH84
		.404"	77	 3003 000 9731	—	—	—	—	—	—	—	—	46 RM77	46 RMF77	46 RMH77	46 RMK77	46 RS77	46 RSF77	—	—	46 RSLH77
28	3/8"	.050	91	 3003 000 8838	—	—	—	33 RM391	33 RS391	33 RD391	—	—	33 RM91	33 RMF91	—	—	33 RS91	33 RSF91	33 RSK91	33 RSL91	33 RSLH91
		.063	92	 3003 000 6038	—	—	—	36 RM391	36 RS391	36 RD391	—	—	36 RM92	—	—	—	36 RS92	—	36 RSK92	36 RSL92	36 RSLH92
			91	 3003 000 6038	—	—	—	36 RM392	36 RS392	36 RD392	—	—	36 RM91	—	—	—	36 RS91	—	36 RSK91	36 RSL91	36 RSLH91
30	3/8"	.063	98	 3003 000 6041	—	—	—	36 RM398	36 RS398	36 RD398	—	—	36 RM98	—	—	—	36 RS98	—	36 RSK98	36 RSL98	36 RSLH98

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS																
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
32	3/8"	.050	105	 3003 000 8846	—	—	—	33RM3105	33RS3105	33RD3105	—	—	33RM105	33RMF105	—	—	33RS105	33RSF105	33RSK105	33RSL105	33RSLH105
		.063	105	 3003 000 6046	—	—	—	36RM3105	36RS3105	36RD3105	—	—	36RM105	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105
	.404"	.063	95	 3003 000 7346	—	—	—	—	—	—	—	—	46RM95	46RMF95	46RMH95	46RMK95	46RS95	46RSF95	—	—	46RSLH95
36	3/8"	.050	114	 3003 000 8853	—	—	—	33RM3114	33RS3114	33RD3114	—	—	33RM114	33RMF114	—	—	33RS114	33RSF114	33RSK114	33RSL114	33RSLH114
		.063	114	 3003 000 6053	—	—	—	36RM3114	36RS3114	36RD3114	—	—	36RM114	—	—	—	36RS114	—	36RSK114	36RSL114	36RSLH114
	.404"	.063	104	 3003 000 7353	—	—	—	—	—	—	—	—	46RM104	46RMF104	46RMH104	46RMK104	46RS104	46RSF104	—	—	46RSLH104
STIHL ROLLOMATIC® ES LIGHT																					
20	3/8"	.050	72	 3003 000 2221	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	—	—	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72
		.063	72	 3003 000 2021	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72
25	3/8"	.050	84	 3003 000 2231	—	—	—	33RM384	33RS384	33RD384	—	—	33RM84	33RMF84	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84
		.063	84	 3003 000 2031	—	—	—	36RM384	36RS384	36RD384	—	—	36RM84	—	—	—	36RS84	—	36RSK84	36RSL84	36RSLH84
28	3/8"	.050	91	 3003 000 2238	—	—	—	33RM391	33RS391	33RD391	—	—	33RM91	33RMF91	—	—	33RS91	33RSF91	33RSK91	33RSL91	33RSLH91
		.063	91	 3003 000 2038	—	—	—	36RM391	36RS391	36RD391	—	—	36RM91	—	—	—	36RS91	—	36RSK91	36RSL91	36RSLH91
32	3/8"	.050	105	 3003 000 2246	—	—	—	33RM3105	33RS3105	33RD3105	—	—	33RM105	33RMF105	—	—	33RS105	33RSF105	33RSK105	33RSL105	33RSLH105
		.063	105	 3003 000 2046	—	—	—	36RM3105	36RS3105	36RD3105	—	—	36RM105	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105
36	3/8"	.050	114	 3003 000 2253	—	—	—	33RM3114	33RS3114	33RD3114	—	—	33RM114	33RMF114	—	—	33RS114	33RSF114	33RSK114	33RSL114	33RSLH114
		.063	114	 3003 000 2053	—	—	—	36RM3114	36RS3114	36RD3114	—	—	36RM114	—	—	—	36RS114	—	36RSK114	36RSL114	36RSLH114
STIHL DUROMATIC® E																					
16	3/8"	.050	60	 3003 000 8613	—	—	—	33RM360	33RS360	33RD360	—	—	33RM60	33RMF60	—	—	33RS60	33RSF60	33RSK60	33RSL60	33RSLH60
				 3003 001 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	—	—	36RS60	—	36RSK60	36RSL60	36RSLH60
		.063	60	 3003 000 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	—	—	36RS60	—	36RSK60	36RSL60	36RSLH60
	.404"	.063	55	 3003 001 9213	—	—	—	—	—	—	—	46RM55	46RMF55	46RMH55	46RMK55	46RS55	46RSF55	—	—	46RSLH55	
				 3003 000 9213	—	—	—	—	—	—	—	46RM55	46RMF55	46RMH55	46RMK55	46RS55	46RSF55	—	—	46RSLH55	
18	3/8"	.063	66	 3003 000 9217	—	—	—	36RM366	36RS366	36RD366	—	—	36RM66	—	—	—	36RS66	—	36RSK66	36RSL66	36RSLH66
	.404"	.063	60	 3003 000 9217	—	—	—	—	—	—	—	—	46RM60	46RMF60	46RMH60	46RMK60	46RS60	46RSF60	—	—	46RSLH60
20	3/8"	.050	72	 3003 000 8621	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	—	—	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72
				 3003 001 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72
		.063	72	 3003 000 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72
	.404"	.063	66	 3003 001 9221	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	46RS66	46RSF66	—	—	46RSLH66	
				 3003 000 9221	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	46RS66	46RSF66	—	—	46RSLH66	
25	3/8"	.050	84	 3003 000 5531	63PM384	63PS384	63PD384	—	—	—	63PM84	63PS84	—	—	—	—	—	—	—	—	—
				 3003 000 5531	—	—	—	33RM384	33RS384	33RD384	—	—	33RM84	33RMF84	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84
		.063	85	 3003 001 5631	—	—	—	36RM385	36RS385	36RD385	—	—	36RM85	—	—	—	36RS85	—	36RSK85	36RSL85	36RSLH85
	.404"	.063	77	 3003 001 5631	—	—	—	36RM384	36RS384	36RD384	—	—	36RM84	—	—	—	36RS84	—	36RSK84	36RSL84	36RSLH84
				 3003 001 5631	—	—	—	—	—	—	—	46RM77	46RMF77	46RMH77	46RMK77	46RS77	46RSF77	—	—	46RSLH77	

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
$\frac{3}{8}$ "	1122 640 2002	7	1122 007 1000	0000 642 1223	7
	1122 640 2000	8	1122 007 1001	0000 642 1216	8
.404"	1122 640 2001	7	1122 007 1002	0000 642 1207	7

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS		
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3		STIHL RAPID™ Super
					●		●
STIHL ROLLOMATIC® E							
16	3/8"	.050	60	● 3003 000 8913	33 RS360 3624 005 0060	—	
STIHL ROLLOMATIC® ES							
16	3/8"	.050	60	● 3003 000 8813	33 RS360 3624 005 0060	33 RS60 3623 005 0060	
18	3/8"	.050	66	● 3003 000 8817	33 RS366 3624 005 0066	33 RS66 3623 005 0066	
20	3/8"	.050	72	● 3003 000 8822	33 RS372 3624 005 0072	33 RS72 3623 005 0072	
25	3/8"	.050	84	● 3003 000 8830	33 RS384 3624 005 0084	33 RS84 3623 005 0084	
				● 3003 000 4030	33 RS384 3624 005 0084	33 RS84 3623 005 0084	
STIHL ROLLOMATIC® ES LIGHT							
28	3/8"	.050	91	● 3003 000 2238	33 RS391 3624 005 0091	33 RS91 3623 005 0091	
32	3/8"	.050	105	● 3003 000 2246	33 RS3105 3624 005 0105	33 RS105 3623 005 0105	
36	3/8"	.050	114	● 3003 000 2253	33 RS3114 3624 005 0114	33 RS114 3623 005 0114	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS																	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Micro™ X	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E																						
16	3/8"	.063	60	 3003 000 5213	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	—	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60
18	3/8"	.063	66	 3003 000 5217	—	—	—	36 RM366	36 RS366	36 RD366	—	—	36 RM66	—	—	—	36 RMX66	36 RS66	—	36 RSK66	36 RSL66	36 RSLH66
20	3/8"	.063	72	 3003 000 5221	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RMX72	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72
25	3/8"	.050	85	 3003 000 7831	—	—	—	33 RM385	33 RS385	33 RD385	—	—	33 RM85	33 RMF85	—	—	—	33 RS85	33 RSF85	33 RSK85	33 RSL85	33 RSLH85
		.050	84	 3003 000 7831	—	—	—	33 RM384	33 RS384	33 RD384	—	—	33 RM84	33 RMF84	—	—	—	33 RS84	33 RSF84	33 RSK84	33 RSL84	33 RSLH84
		.063	84	 3003 000 5231	—	—	—	36 RM384	36 RS384	36 RD384	—	—	36 RM84	—	—	—	36 RMX84	36 RS84	—	36 RSK84	36 RSL84	36 RSLH84
STIHL ROLLOMATIC® ES																						
16	3/8"	.050	60	 3003 000 8813	—	—	—	33 RM360	33 RS360	33 RD360	—	—	33 RM60	33 RMF60	—	—	—	33 RS60	33 RSF60	33 RSK60	33 RSL60	33 RSLH60
		.063	60	 3003 001 9413	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	36 RMX60	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60
			 3003 000 9413	—	—	—	36 RM360	36 RS360	36 RD360	—	—	36 RM60	—	—	—	36 RMX60	36 RS60	—	36 RSK60	36 RSL60	36 RSLH60	
18	3/8"	.050	66	 3003 000 8817	—	—	—	33 RM366	33 RS366	33 RD366	—	—	33 RM66	33 RMF66	—	—	—	33 RS66	33 RSF66	33 RSK66	33 RSL66	33 RSLH66
		.063	66	 3003 000 9417	—	—	—	36 RM366	36 RS366	36 RD366	—	—	36 RM66	—	—	—	36 RMX66	36 RS66	—	36 RSK66	36 RSL66	36 RSLH66
20	3/8"	.050	72	 3003 000 8822	—	—	—	33 RM372	33 RS372	33 RD372	—	—	33 RM72	33 RMF72	—	—	—	33 RS72	33 RSF72	33 RSK72	33 RSL72	33 RSLH72
		.063	72	 3003 000 9421	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	—	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72
			 3003 002 9421	—	—	—	36 RM372	36 RS372	36 RD372	—	—	36 RM72	—	—	—	36 RMX72	36 RS72	—	36 RSK72	36 RSL72	36 RSLH72	
	.404"	66	 3003 000 9721	—	—	—	—	—	—	—	—	46 RM66	46 RMF66	46 RMH66	46 RMX66	—	46 RS66	46 RSF66	—	—	46 RSLH66	
22	3/8"	.063	76	 3003 000 9425	—	—	—	36 RM376	36 RS376	36 RD376	—	—	36 RM76	—	—	—	—	36 RS76	—	36 RSK76	36 RSL76	36 RSLH76

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS																		
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Micro™ X	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH	
25	3/8"	.050	84	3003 000 8830	—	—	—	33RM384	33RS384	33RD384	—	—	33RM84	33RMF84	—	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84	
			84	3003 000 4030	—	—	—	33RM384	33RS384	33RD384	—	—	33RM84	33RMF84	—	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84	
		.063	84	3003 000 9431	—	—	—	36RM384	36RS384	36RD384	—	—	36RM84	—	—	—	36RMX84	36RS84	—	36RSK84	36RSL84	36RSLH84	
			.404"	77	3003 000 9731	—	—	—	—	—	—	—	46RM77	46RMF77	46RMH77	46RMK77	—	46RS77	46RSF77	—	—	46RSLH77	
28	3/8"	.050	91	3003 000 8838	—	—	—	33RM391	33RS391	33RD391	—	—	33RM91	33RMF91	—	—	—	33RS91	33RSF91	33RSK91	33RSL91	33RSLH91	
		92	3003 000 6038	—	—	—	36RM392	36RS392	36RD392	—	—	36RM92	—	—	—	—	36RS92	—	36RSK92	36RSL92	36RSLH92		
		91	3003 000 6038	—	—	—	36RM391	36RS391	36RD391	—	—	36RM91	—	—	—	36RMX91	36RS91	—	36RSK91	36RSL91	36RSLH91		
30	3/8"	.063	98	3003 000 6041	—	—	—	36RM398	36RS398	36RD398	—	—	36RM98	—	—	—	36RMX98	36RS98	—	36RSK98	36RSL98	36RSLH98	
32	3/8"	.050	105	3003 000 8846	—	—	—	33RM3105	33RS3105	33RD3105	—	—	33RM105	33RMF105	—	—	—	33RS105	33RSF105	33RSK105	33RSL105	33RSLH105	
		.063	105	3003 000 6046	—	—	—	36RM3105	36RS3105	36RD3105	—	—	36RM105	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105		
		.404"	95	3003 000 7346	—	—	—	—	—	—	—	46RM95	46RMF95	46RMH95	46RMK95	—	46RS95	46RSF95	—	—	46RSLH95		
36	3/8"	.050	114	3003 000 8853	—	—	—	33RM3114	33RS3114	33RD3114	—	—	33RM114	33RMF114	—	—	—	33RS114	33RSF114	33RSK114	33RSL114	33RSLH114	
		.063	114	3003 000 6053	—	—	—	36RM3114	36RS3114	36RD3114	—	—	36RM114	—	—	—	36RMX114	36RS114	—	36RSK114	36RSL114	36RSLH114	
		.404"	104	3003 000 7353	—	—	—	—	—	—	—	46RM104	46RMF104	46RMH104	46RMK104	—	46RS104	46RSF104	—	—	46RSLH104		
STIHL ROLLOMATIC® ES LIGHT																							
20	3/8"	.050	72	3003 000 2221	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	—	—	—	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72	
		.063	72	3003 000 2021	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RMX72	36RS72	—	36RSK72	36RSL72	36RSLH72	
25	3/8"	.050	84	3003 000 2231	—	—	—	33RM384	33RS384	33RD384	—	—	33RM84	33RMF84	—	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84	
		.063	84	3003 000 2031	—	—	—	36RM384	36RS384	36RD384	—	—	36RM84	—	—	—	36RMX84	36RS84	—	36RSK84	36RSL84	36RSLH84	
28	3/8"	.050	91	3003 000 2238	—	—	—	33RM391	33RS391	33RD391	—	—	33RM91	33RMF91	—	—	—	33RS91	33RSF91	33RSK91	33RSL91	33RSLH91	
		.063	91	3003 000 2038	—	—	—	36RM391	36RS391	36RD391	—	—	36RM91	—	—	—	36RMX91	36RS91	—	36RSK91	36RSL91	36RSLH91	
32	3/8"	.050	105	3003 000 2246	—	—	—	33RM3105	33RS3105	33RD3105	—	—	33RM105	33RMF105	—	—	—	33RS105	33RSF105	33RSK105	33RSL105	33RSLH105	
		.063	105	3003 000 2046	—	—	—	36RM3105	36RS3105	36RD3105	—	—	36RM105	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105		
36	3/8"	.050	114	3003 000 2253	—	—	—	33RM3114	33RS3114	33RD3114	—	—	33RM114	33RMF114	—	—	—	33RS114	33RSF114	33RSK114	33RSL114	33RSLH114	
		.063	114	3003 000 2053	—	—	—	36RM3114	36RS3114	36RD3114	—	—	36RM114	—	—	—	36RMX114	36RS114	—	36RSK114	36RSL114	36RSLH114	
STIHL DUROMATIC® E																							
16	3/8"	.050	60	3003 000 8613	—	—	—	33RM360	33RS360	33RD360	—	—	33RM60	33RMF60	—	—	—	33RS60	33RSF60	33RSK60	33RSL60	33RSLH60	
				3003 001 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	—	—	36RMX60	36RS60	—	36RSK60	36RSL60	36RSLH60	
		.063	60	3003 000 9213	—	—	—	36RM360	36RS360	36RD360	—	—	36RM60	—	—	—	36RMX60	36RS60	—	36RSK60	36RSL60	36RSLH60	
				3003 001 9213	—	—	—	—	—	—	—	—	46RM55	46RMF55	46RMH55	46RMK55	—	46RS55	46RSF55	—	—	46RSLH55	
18	3/8"	.063	55	3003 000 9213	—	—	—	—	—	—	—	—	46RM55	46RMF55	46RMH55	46RMK55	—	46RS55	46RSF55	—	—	46RSLH55	
				3003 000 9213	—	—	—	—	—	—	—	—	46RM55	46RMF55	46RMH55	46RMK55	—	46RS55	46RSF55	—	—	46RSLH55	
		.063	66	3003 000 9217	—	—	—	36RM366	36RS366	36RD366	—	—	36RM66	—	—	—	—	36RS66	—	36RSK66	36RSL66	36RSLH66	
			60	3003 000 9217	—	—	—	—	—	—	—	—	46RM60	46RMF60	46RMH60	46RMK60	—	46RS60	46RSF60	—	—	46RSLH60	
20	3/8"	.050	72	3003 000 8621	—	—	—	33RM372	33RS372	33RD372	—	—	33RM72	33RMF72	—	—	—	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72	
				3003 001 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RMX72	36RS72	—	36RSK72	36RSL72	36RSLH72	
		.063	72	3003 000 9221	—	—	—	36RM372	36RS372	36RD372	—	—	36RM72	—	—	—	36RMX72	36RS72	—	36RSK72	36RSL72	36RSLH72	
				3003 001 9221	—	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	—	46RS66	46RSF66	—	—	46RSLH66	
25	3/8"	.063	66	3003 000 9221	—	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	—	46RS66	46RSF66	—	—	46RSLH66	
				3003 000 9221	—	—	—	—	—	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	—	46RS66	46RSF66	—	—	46RSLH66	
		.063	84	3003 000 5531	63PM384	63PS384	63PD384	—	—	—	63PM84	63PS84	—	—	—	—	—	—	—	—	—	—	
			85	3003 001 5631	—	—	—	36RM385	36RS385	36RD385	—	—	36RM85	—	—	—	—	36RS85	—	36RSK85	36RSL85	36RSLH85	
25	3/8"	.063	84	3003 001 5631	—	—	—	36RM384	36RS384	36RD384	—	—	36RM84	—	—	—	36RMX84	36RS84	—	36RSK84	36RSL84	36RSLH84	
			.404"	77	3003 001 5631	—	—	—	—	—	—	—	46RM77	46RMF77	46RMH77	46RMK77	—	46RS77	46RSF77	—	—	46RSLH77	

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
$\frac{3}{8}$ "	1122 640 2002	7	1122 007 1000	0000 642 1223	7
	1122 640 2000	8	1122 007 1001	0000 642 1216	8
$\frac{3}{8}$ " P	1122 640 2006	7	—	—	—
.404"	1122 640 2001	7	1122 007 1002	0000 642 1207	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® ES						
16	3/8"	.050	60	3003 000 8813	33 RS360 3624 005 0060	33 RS 60 3623 005 0060
18	3/8"	.050	66	3003 000 8817	33 RS366 3624 005 0066	33 RS 66 3623 005 0066
20	3/8"	.050	72	3003 000 8822	33 RS372 3624 005 0072	33 RS 72 3623 005 0072
25	3/8"	.050	84	3003 000 4030	33 RS384 3624 005 0084	33 RS 84 3623 005 0084
STIHL ROLLOMATIC® ES LIGHT						
28	3/8"	.050	91	3003 000 2238	33 RS391 3624 005 0091	33 RS 91 3623 005 0091
32	3/8"	.050	105	3003 000 2246	3 RS3105 3624 005 0105	33 RS 105 3623 005 0105
36	3/8"	.050	114	3003 000 2253	3 RS3114 3624 005 0114	33 RS 114 3623 005 0114

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duo 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Micro™ X	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3	
STIHL ROLLOMATIC® E																				
16	3/8"	.063	60	 3003 000 5213	36RM360	36RS360	36RD360	36RM60	—	—	—	—	36RS60	—	36RSK60	36RSL60	36RSLH60	36RH60	36RH360	
18	3/8"	.063	66	 3003 000 5217	36RM366	36RS366	36RD366	36RM66	—	—	—	36RMX66	36RS66	—	36RSK66	36RSL66	36RSLH66	36RH66	36RH366	
20	3/8"	.063	72	 3003 000 5221	36RM372	36RS372	36RD372	36RM72	—	—	—	36RMX72	36RS72	—	36RSK72	36RSL72	36RSLH72	36RH72	36RH372	
25	3/8"	.050	84	 3003 000 7831	33RM384	33RS384	33RD384	33RM84	33RMF84	—	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84	33RH84	33RH384	
		.050	85	 3003 000 7831	33RM385	33RS385	33RD385	33RM85	33RMF85	—	—	—	33RS85	33RSF85	33RSK85	33RSL85	33RSLH85	—	—	
		.063	84	 3003 000 5231	36RM384	36RS384	36RD384	36RM84	—	—	—	36RMX84	36RS84	—	36RSK84	36RSL84	36RSLH84	36RH84	36RH384	
STIHL ROLLOMATIC® ES																				
16	3/8"	.050	60	 3003 000 8813	33RM360	33RS360	33RD360	33RM60	33RMF60	—	—	—	—	33RSF60	33RSK60	33RSL60	33RSLH60	33RH60	33RH360	
		.063	60	 3003 001 9413	36RM360	36RS360	36RD360	36RM60	—	—	—	36RMX60	36RS60	—	36RSK60	36RSL60	36RSLH60	36RH60	36RH360	
			 3003 000 9413	36RM360	36RS360	36RD360	36RM60	—	—	—	36RMX60	36RS60	—	36RSK60	36RSL60	36RSLH60	36RH60	36RH360		
18	3/8"	.050	66	 3003 000 8817	33RM366	33RS366	33RD366	33RM66	33RMF66	—	—	—	—	33RSF66	33RSK66	33RSL66	33RSLH66	33RH66	33RH366	
		.063	66	 3003 000 9417	36RM366	36RS366	36RD366	36RM66	—	—	—	36RMX66	36RS66	—	36RSK66	36RSL66	36RSLH66	36RH66	36RH366	
			 3003 000 8822	33RM372	33RS372	33RD372	33RM72	33RMF72	—	—	—	—	33RSF72	33RSK72	33RSL72	33RSLH72	33RH72	33RH372		
20	3/8"	.050	72	 3003 000 9421	36RM372	36RS372	36RD372	36RM72	—	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72	36RH72	36RH372	
		.063	72	 3003 000 9421	36RM372	36RS372	36RD372	36RM72	—	—	—	—	36RS72	—	36RSK72	36RSL72	36RSLH72	36RH72	36RH372	
			 3003 000 9721	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	—	46RS66	46RSF66	—	—	46RSLH66	—	—		
22	3/8"	.063	76	 3003 000 9425	36RM376	36RS376	36RD376	36RM76	—	—	—	—	36RS76	—	36RSK76	36RSL76	36RSLH76	36RH76	36RH376	
25	3/8"	.050	84	 3003 000 8830	33RM384	33RS384	33RD384	33RM84	33RMF84	—	—	—	—	33RSF84	33RSK84	33RSL84	33RSLH84	33RH84	33RH384	
		.063	84	 3003 000 4030	33RM384	33RS384	33RD384	33RM84	33RMF84	—	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84	33RH84	33RH384	
			 3003 000 9431	36RM384	36RS384	36RD384	36RM84	—	—	—	—	36RS84	—	36RSK84	36RSL84	36RSLH84	36RH84	36RH384		
	.404"	.063	77	 3003 000 9731	—	—	—	46RM77	46RMF77	46RMH77	46RMK77	—	46RS77	46RSF77	—	—	46RSLH77	—	—	

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS														
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Micro™ X	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ HEXA	 STIHL RAPID™ HEXA 3
28	3/8"	.050	91	 3003 000 8838	33RM391	33RS391	33RD391	33RM91	33RMF91	—	—	—	33RS91	33RSF91	33RSK91	33RSL91	33RSLH91	33RH91	33RH391
		.063	91	 3003 000 6038	36RM391	36RS391	36RD391	36RM91	—	—	—	36RMX91	36RS91	—	36RSK91	36RSL91	36RSLH91	36RH91	36RH391
			92	 3003 000 6038	36RM392	36RS392	36RD392	36RM92	—	—	—	—	36RS92	—	36RSK92	36RSL92	36RSLH92		
30	3/8"	.063	98	 3003 000 6041	36RM398	36RS398	36RD398	36RM98	—	—	—	36RMX98	36RS98	—	36RSK98	36RSL98	36RSLH98	36RH98	36RH398
32	3/8"	.050	105	 3003 000 8846	33RM3105	33RS3105	33RD3105	33RM105	33RMF105	—	—	—	33RS105	33RSF105	33RSK105	33RSL105	33RSLH105	33RH105	33RH3105
		.063	105	 3003 000 6046	36RM3105	36RS3105	36RD3105	36RM105	—	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105	36RH105	36RH3105
		.404"	.063	95	 3003 000 7346	—	—	—	46RM95	46RMF95	46RMH95	46RMK95	—	46RS95	46RSF95	—	—	46RSLH95	
36	3/8"	.050	114	 3003 000 8853	33RM3114	33RS3114	33RD3114	33RM114	33RMF114	—	—	—	33RS114	33RSF114	33RSK114	33RSL114	33RSLH114	33RH114	33RH3114
		.063	114	 3003 000 6053	36RM3114	36RS3114	36RD3114	36RM114	—	—	—	36RMX114	36RS114	—	36RSK114	36RSL114	36RSLH114	36RH114	36RH3114
		.404"	.063	104	 3003 000 7353	—	—	—	46RM104	46RMF104	46RMH104	46RMK104	—	46RS104	46RSF104	—	—	46RSLH104	
STIHL ROLLOMATIC® ES LIGHT																			
20	3/8"	.050	72	 3003 000 2221	33RM372	33RS372	33RD372	33RM72	33RMF72	—	—	—	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72	33RH72	33RH372
		.063	72	 3003 000 2021	36RM372	36RS372	36RD372	36RM72	—	—	—	36RMX72	36RS72	—	36RSK72	36RSL72	36RSLH72	36RH72	36RH372
25	3/8"	.050	84	 3003 000 2231	33RM384	33RS384	33RD384	33RM84	33RMF84	—	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84	33RH84	33RH384
		.063	84	 3003 000 2031	36RM384	36RS384	36RD384	36RM84	—	—	—	36RMX84	36RS84	—	36RSK84	36RSL84	36RSLH84	36RH84	36RH384
28	3/8"	.050	91	 3003 000 2238	33RM391	33RS391	33RD391	33RM91	33RMF91	—	—	—	—	33RSF91	33RSK91	33RSL91	33RSLH91	33RH91	33RH391
		.063	91	 3003 000 2038	36RM391	36RS391	36RD391	36RM91	—	—	—	36RMX91	36RS91	—	36RSK91	36RSL91	36RSLH91	36RH91	36RH391
32	3/8"	.050	105	 3003 000 2246	33RM3105	33RS3105	33RD3105	33RM105	33RMF105	—	—	—	—	33RSF105	33RSK105	33RSL105	33RSLH105	33RH105	33RH3105
		.063	105	 3003 000 2046	36RM3105	36RS3105	36RD3105	36RM105	—	—	—	—	36RS105	—	36RSK105	36RSL105	36RSLH105	36RH105	36RH3105
36	3/8"	.050	114	 3003 000 2253	33RM3114	33RS3114	33RD3114	33RM114	33RMF114	—	—	—	—	33RSF114	33RSK114	33RSL114	33RSLH114	33RH114	33RH3114
		.063	114	 3003 000 2053	36RM3114	36RS3114	36RD3114	36RM114	—	—	—	36RMX114	36RS114	—	36RSK114	36RSL114	36RSLH114	36RH114	36RH3114
STIHL DUROMATIC® E																			
16	3/8"	.050	60	 3003 000 8613	33RM360	33RS360	33RD360	33RM60	33RMF60	—	—	—	33RS60	33RSF60	33RSK60	33RSL60	33RSLH60	33RH60	33RH360
		.063	60	 3003 001 9213	36RM360	36RS360	36RD360	36RM60	—	—	—	36RMX60	36RS60	—	36RSK60	36RSL60	36RSLH60	36RH60	36RH360
				 3003 000 9213	36RM360	36RS360	36RD360	36RM60	—	—	—	36RMX60	36RS60	—	36RSK60	36RSL60	36RSLH60	36RH60	36RH360
		.404"	.063	55	 3003 001 9213	—	—	—	46RM55	46RMF55	46RMH55	46RMK55	—	46RS55	46RSF55	—	—	46RSLH55	
18	3/8"	.063	66	 3003 000 9217	36RM366	36RS366	36RD366	36RM66	—	—	—	36RMX66	36RS66	—	36RSK66	36RSL66	36RSLH66	36RH66	36RH366
		.404"	.063	60	 3003 000 9217	—	—	—	46RM60	46RMF60	46RMH60	46RMK60	—	46RS60	46RSF60	—	—	46RSLH60	
20	3/8"	.050	72	 3003 000 8621	33RM372	33RS372	33RD372	33RM72	33RMF72	—	—	—	33RS72	33RSF72	33RSK72	33RSL72	33RSLH72	33RH72	33RH372
		.063	72	 3003 001 9221	36RM372	36RS372	36RD372	36RM72	—	—	—	36RMX72	36RS72	—	36RSK72	36RSL72	36RSLH72	36RH72	36RH372
				 3003 000 9221	36RM372	36RS372	36RD372	36RM72	—	—	—	36RMX72	36RS72	—	36RSK72	36RSL72	36RSLH72	36RH72	36RH372
		.404"	.063	66	 3003 000 9221	—	—	—	46RM66	46RMF66	46RMH66	46RMK66	—	46RS66	46RSF66	—	—	46RSLH66	
25	3/8"	.050	84	 3003 000 5531	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
		.063	84	 3003 001 5631	33RM384	33RS384	33RD384	33RM84	33RMF84	—	—	—	33RS84	33RSF84	33RSK84	33RSL84	33RSLH84	33RH84	33RH384
		.063	85	 3003 001 5631	36RM385	36RS385	36RD385	36RM85	—	—	—	36RMX84	36RS85	—	36RSK85	36RSL85	36RSLH85	36RH84	36RH384
		.404"	.063	77	 3003 001 5631	—	—	—	46RM77	46RMF77	46RMH77	46RMK77	—	46RS77	46RSF77	—	—	46RSLH77	

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
$\frac{3}{8}$ "	1122 640 2002	7	1122 007 1000	0000 642 1223	7
	1122 640 2000	8	1122 007 1001	0000 642 1216	8
.404"	1122 640 2001	7	1122 007 1002	0000 642 1207	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® ES						
21	3/8"	.063	75	3002 000 9123	36 RS3 75 3626 005 0075	—
25	.404"	.063	80	3002 000 9731	—	46 RS 80 3946 005 0080

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS												
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Micro™ X	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES																	
25	.404"	.063	80	 3002 000 9731	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RMX 80	—	46 RSF 80	—	—	46 RSLH 80
30	.404"	.063	91	 3002 000 9741	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RMX 91	46 RS 91	46 RSF 91	—	—	46 RSLH 91
36	.404"	.063	108	 3002 000 9753	—	—	—	46 RM 108	46 RMF 108	46 RMH 108	46 RMK 108	—	46 RS 108	46 RSF 108	—	—	46 RSLH 108
41	.404"	.063	123	 3002 000 9757	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	—	46 RS 123	46 RSF 123	—	—	46 RSLH 123
STIHL DUROMATIC® E																	
25	.404"	.063	80	 3002 000 9231	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RMX 80	46 RS 80	46 RSF 80	—	—	46 RSLH 80
30	3/8"	.063	100	 3002 000 8041	36 RM3 100	36 RS3 100	36 RD3 100	36 RM 100	—	—	—	—	36 RS 100	—	36 RSK 100	36 RSL 100	36 RSLH 100
	.404"	.063	91	 3002 000 8041	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RMX 91	46 RS 91	46 RSF 91	—	—	46 RSLH 91
36	3/8"	.063	114	 3002 000 8052	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
	.404"	.063	104	 3002 000 8052	—	—	—	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RMX 104	46 RS 104	46 RSF 104	—	—	46 RSLH 104
41	3/8"	.063	135	 3002 000 8058	36 RM3 135	36 RS3 135	36 RD3 135	36 RM 135	—	—	—	—	36 RS 135	—	36 RSK 135	36 RSL 135	36 RSLH 135
	.404"	.063	123	 3002 000 8058	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	—	46 RS 123	46 RSF 123	—	—	46 RSLH 123

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1124 640 2004	8	1124 007 1025	0000 642 1216	8
.404"	1124 640 2005	7	1124 007 1024	0000 642 1207	7

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Super 3	STIHL RAPID™ Super
STIHL ROLLOMATIC® ES						
21	3/8"	.063	75	3002 000 9123	36 RS3 75 3626 005 0075	—
25	.404"	.063	80	3002 000 9731	—	46 RS 80 3946 005 0080

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS												
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Micro™ X	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES																	
25	.404"	.063	80	 3002 000 9731	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RMX 80	—	46 RSF 80	—	—	46 RSLH 80
30	.404"	.063	91	 3002 000 9741	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RMX 91	46 RS 91	46 RSF 91	—	—	46 RSLH 91
36	.404"	.063	108	 3002 000 9753	—	—	—	46 RM 108	46 RMF 108	46 RMH 108	46 RMK 108	—	46 RS 108	46 RSF 108	—	—	46 RSLH 108
41	.404"	.063	123	 3002 000 9757	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	—	46 RS 123	46 RSF 123	—	—	46 RSLH 123
STIHL DUOMATIC® E																	
25	.404"	.063	80	 3002 000 9231	—	—	—	46 RM 80	46 RMF 80	46 RMH 80	46 RMK 80	46 RMX 80	46 RS 80	46 RSF 80	—	—	46 RSLH 80
30	3/8"	.063	100	 3002 000 8041	36 RM3 100	36 RS3 100	36 RD3 100	36 RM 100	—	—	—	—	36 RS 100	—	36 RSK 100	36 RSL 100	36 RSLH 100
	.404"	.063	91	 3002 000 8041	—	—	—	46 RM 91	46 RMF 91	46 RMH 91	46 RMK 91	46 RMX 91	46 RS 91	46 RSF 91	—	—	46 RSLH 91
36	3/8"	.063	114	 3002 000 8052	36 RM3 114	36 RS3 114	36 RD3 114	36 RM 114	—	—	—	—	36 RS 114	—	36 RSK 114	36 RSL 114	36 RSLH 114
	.404"	.063	104	 3002 000 8052	—	—	—	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RMX 104	46 RS 104	46 RSF 104	—	—	46 RSLH 104
41	3/8"	.063	135	 3002 000 8058	36 RM3 135	36 RS3 135	36 RD3 135	36 RM 135	—	—	—	—	36 RS 135	—	36 RSK 135	36 RSL 135	36 RSLH 135
	.404"	.063	123	 3002 000 8058	—	—	—	46 RM 123	46 RMF 123	46 RMH 123	46 RMK 123	—	46 RS 123	46 RSF 123	—	—	46 RSLH 123

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1124 640 2004	8	1124 007 1025	0000 642 1216	8
.404"	1124 640 2005	7	1124 007 1024	0000 642 1207	7

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E						
14	1/4"	.050	72	3005 000 6409	13 RM 72	—
CARVING						
12	1/4"	.050	64	3005 000 3205	—	13 RMS 64

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4"	1204 642 1300	8	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number		
16	3/8" P	.043	55	3005 008 3913	●	STIHL PICCO™ Micro™ Mini 3
STIHL ROLLOMATIC® E MINI						
				6l PMM3 55 3610 005 0055		

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Super
STIHL ROLLOMATIC® E														
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—
16	.325"	.063	62	3005 008 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	26 RS 62
				3005 000 4713	—	—	—	—	26 RM3 62	26 RD3 62	—	—	26 RM 62	26 RS 62
				3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—
	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	—	—	63 PM 56	63 PS 56	—	—
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	—	—	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT														
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	—	—	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	—	—	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	—	—	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI														
12	3/8" P	.043	44	3005 000 3905	6l PMM3 44	—	—	—	—	—	—	—	—	—
14	3/8" P	.043	50	3005 008 3909	6l PMM3 50	—	—	—	—	—	—	—	—	—
				3005 000 3909	6l PMM3 50	—	—	—	—	—	—	—	—	—
			51	3005 008 3909	6l PMM3 51	—	—	—	—	—	—	—	—	—
				3005 000 3909	6l PMM3 51	—	—	—	—	—	—	—	—	—
				3005 000 3909	6l PMM3 51	—	—	—	—	—	—	—	—	—
16	3/8" P	.043	55	3005 008 3913	6l PMM3 55	—	—	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT														
12	3/8" P	.043	44	3005 000 7605	6l PMM3 44	—	—	—	—	—	—	—	—	—
14	3/8" P	.043	50	3005 000 7609	6l PMM3 50	—	—	—	—	—	—	—	—	—

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
.325"	1206 642 1304	8	—	—	—
3/8" P	1206 642 1301	7	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL RAPID™ Super 3	
STIHL ROLLOMATIC® E						
16	3/8"	.050	60	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	66	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	72	● 3003 008 8921	33 RS3 72	3624 005 0072
STIHL ROLLOMATIC® ES						
25	3/8"	.050	84	● 3003 000 4030	33 RS3 84	3624 005 0084

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.050	60	 3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 000 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
				 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
		.063	66		36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
				 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
		.063	60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
				 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
		.063	66		36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72		36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
25	3/8"	.050	84	 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
		.063	84		36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
				 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72		36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
				 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
		.063	84		36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL DUROMATIC® E														
16	3/8"	.050	60	3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
		.063	60	3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
		.063	72	3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	85	3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	1206 642 1301	7	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS						
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super LH
STIHL ROLLOMATIC® ES											
20	.404"	.063	66	3003 000 9721	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	46 RSLH 66
25	.404"	.063	77	3003 000 9731	46 RM 77	46 RMF 77	46 RMH 77	46 RMK 77	46 RS 77	46 RSF 77	46 RSLH 77
32	.404"	.063	95	3003 000 7346	46 RM 95	46 RMF 95	46 RMH 95	46 RMK 95	46 RS 95	46 RSF 95	46 RSLH 95
36	.404"	.063	104	3003 000 7353	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	46 RSLH 104
STIHL DUOMATIC® E											
16	.404"	.063	55	3003 001 9213	46 RM 55	46 RMF 55	46 RMH 55	46 RMK 55	46 RS 55	46 RSF 55	46 RSLH 55
				3003 000 9213	46 RM 55	46 RMF 55	46 RMH 55	46 RMK 55	46 RS 55	46 RSF 55	46 RSLH 55
18	.404"	.063	60	3003 000 9217	46 RM 60	46 RMF 60	46 RMH 60	46 RMK 60	46 RS 60	46 RSF 60	46 RSLH 60
20	.404"	.063	66	3003 001 9221	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	46 RSLH 66
				3003 000 9221	46 RM 66	46 RMF 66	46 RMH 66	46 RMK 66	46 RS 66	46 RSF 66	46 RSLH 66
25	.404"	.063	77	3003 001 5631	46 RM 77	46 RMF 77	46 RMH 77	46 RMK 77	46 RS 77	46 RSF 77	46 RSLH 77

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
.404"	1202 642 1300	7	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
16	3/8" P	.043	55	3005 008 3913	● STIHL PICCO™ Micro™ Mini 3	
STIHL ROLLOMATIC® E MINI						
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/4" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/4" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/4" P	.050	55	3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	—	—
18	3/4" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/4" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/4" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/4" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
12	3/4" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
14	3/4" P	.043	50	3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
			50	3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—
			51	3005 008 3909	61 PMM3 51	—	—	—	—	—	—	—
			51	3005 000 3909	61 PMM3 51	—	—	—	—	—	—	—
16	3/4" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/4" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/4" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4"	.050	64	3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1208 642 1301	8	—	—	—
3/8" P	1206 642 1301	7	—	—	—

E 140, E 160, E 180 C | MSE 140 C,
MSE 160 C, MSE 180 C, MSE 200 C

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	
STIHL ROLLOMATIC® E MINI						
16	3/4" P	.043	55	3005 008 3913	61 PMM3 55 3610 005 0055	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/4" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/4" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/4" P	.050	55	3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	—	—
18	3/4" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/4" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/4" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/4" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
12	3/4" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
14	3/4" P	.043	50	3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
			50	3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—
			51	3005 008 3909	61 PMM3 51	—	—	—	—	—	—	—
			51	3005 000 3909	61 PMM3 51	—	—	—	—	—	—	—
16	3/4" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/4" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/4" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4"	.050	64	3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

E 140, E 160, E 180 C | MSE 140 C,
MSE 160 C, MSE 180 C, MSE 200 C

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1208 642 1301	8	—	—	—
3/8" P	1206 642 1301	7	—	—	—

MSE 140 C, MSE 160 C, MSE 180 C,
MSE 200 C | MSE 141 C

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
12	3/8" P	.043	44	3005 008 3905	STIHL RAPID™ Micro™ 3	
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	44	3005 008 3905	61 PM3 44 3610 005 0044	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			56	3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	—	—
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
				3005 003 3909	61 PMM3 50	—	—	—	—	—	—	—
				3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4"	.050	64	3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1208 642 1301	8	—	—	—
3/8" P	1206 642 1301	7	—	—	—

MSE 141 C | MSE 170 C, MSE 190 C,
MSE 210 C, MSE 230 C

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
					● STIHL PICCO™ Micro™ 3	
STIHL ROLLOMATIC® E MINI						
12	3/8" P	.043	45	● 3005 000 4805	63 PM3 45	3636 005 0045
14	3/8" P	.043	51	● 3005 000 4809	63 PM3 51	3636 005 0051
16	3/8" P	.043	56	● 3005 008 4813	63 PM3 56	3636 005 0056

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS							
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ S
STIHL ROLLOMATIC® E												
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	1/4"	.050	72	 3005 000 6409	—	—	—	—	—	—	13 RM 72	—
	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
			 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—	
			56	 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	—	—
18	3/8" P	.050	61	 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—	—
STIHL ROLLOMATIC® E LIGHT												
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—	—
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—	—
STIHL ROLLOMATIC® E MINI												
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—	—	—
				 3005 003 3909	61 PMM3 50	—	—	—	—	—	—	—
				 3005 000 3909	61 PMM3 50	—	—	—	—	—	—	—
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55	—	—	—	—	—	—	
STIHL ROLLOMATIC® E MINI LIGHT												
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—	—	—
CARVING												
12	1/4"	.050	64	 3005 000 3205	—	—	—	—	—	—	—	13 RMS 64

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4"	1208 642 1301	8	—	—	—
3/8" P	1209 642 1200	6	—	—	—
	1206 642 1301	7	—	—	—

MSE 170 C, MSE 190 C, MSE 210 C,
MSE 230 C | MSE 220, MSE 220 C

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
STIHL ROLLOMATIC® E						
16	3/8"	.050	45	3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	51	3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	56	3003 008 8921	33 RS3 72	3624 005 0072

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.063	67	3003 008 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
				3003 000 6813	26 RM3 67	–	26 RD3 67	26 RM 67	–	26 RS 67	–	–	–	–
	3/8"	.050	60	3003 008 8913	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	3003 008 8917	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	3003 008 8921	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	85	3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85	33 RSL 85	33 RSLH 85
STIHL ROLLOMATIC® ES														
16	3/8"	.050	60	3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
				3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	–	36 RS 60	–	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	–	36 RS 66	–	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
22	3/8"	.063	76	3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	–	36 RS 76	–	36 RSK 76	36 RSL 76	36 RSLH 76
		.050	84	3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
25	3/8"	.063	84	3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	–	36 RS 72	–	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	–	36 RS 84	–	36 RSK 84	36 RSL 84	36 RSLH 84

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

MSE 170 C, MSE 190 C, MSE 210 C,
MSE 230 C | MSE 220, MSE 220 C

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL DUROMATIC® E														
16	3/8"	.050	60	3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	85	3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
.325"	1207 640 2051	8	—	—	—
3/8"	1207 640 2050	8	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		
						● STIHL RAPID™ Super 3
STIHL ROLLOMATIC® E						
16	3/8"	.050	45	● 3003 008 8913	33 RS3 60	3624 005 0060
18	3/8"	.050	51	● 3003 008 8917	33 RS3 66	3624 005 0066
20	3/8"	.050	56	● 3003 008 8921	33 RS3 72	3624 005 0072

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH
STIHL ROLLOMATIC® E														
16	3/8"	.050	60	 3003 008 8913	33 RM3 60	—	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 000 6113	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 008 8917	33 RM3 66	—	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 008 6117	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 008 8921	33 RM3 72	—	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 008 6121	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
			72	 3003 000 5221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
		25	3/8"	.050	85	 3003 000 7831	33 RM3 85	33 RS3 85	33 RD3 85	33 RM 85	33 RMF 85	33 RS 85	33 RSF 85	33 RSK 85
84	 3003 000 7831				33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
.063	84			 3003 000 5231	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
	STIHL ROLLOMATIC® ES													
16	3/8"	.050	60	 3003 000 8813	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	 3003 001 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
			60	 3003 000 9413	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.050	66	 3003 000 8817	33 RM3 66	33 RS3 66	33 RD3 66	33 RM 66	33 RMF 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66
		.063	66	 3003 000 9417	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	 3003 000 8822	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
			72	 3003 002 9421	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
		22	3/8"	.063	76	 3003 000 9425	36 RM3 76	36 RS3 76	36 RD3 76	36 RM 76	—	36 RS 76	—	36 RSK 76
.050	84			 3003 000 8830	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
	25	3/8"	84	 3003 000 4030	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
.063			84	 3003 000 9431	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
STIHL ROLLOMATIC® ES LIGHT														
20	3/8"	.050	72	 3003 000 2221	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	 3003 000 2021	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	 3003 000 2231	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	84	 3003 000 2031	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84
28	3/8"	.050	91	 3003 000 2238	33 RM3 91	33 RS3 91	33 RD3 91	33 RM 91	33 RMF 91	33 RS 91	33 RSF 91	33 RSK 91	33 RSL 91	33 RSLH 91
		.063	91	 3003 000 2038	36 RM3 91	36 RS3 91	36 RD3 91	36 RM 91	—	36 RS 91	—	36 RSK 91	36 RSL 91	36 RSLH 91

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS									
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ F	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH
STIHL DUOMATIC® E														
16	3/8"	.050	60	3003 000 8613	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60
		.063	60	3003 001 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
				3003 000 9213	36 RM3 60	36 RS3 60	36 RD3 60	36 RM 60	—	36 RS 60	—	36 RSK 60	36 RSL 60	36 RSLH 60
18	3/8"	.063	66	3003 000 9217	36 RM3 66	36 RS3 66	36 RD3 66	36 RM 66	—	36 RS 66	—	36 RSK 66	36 RSL 66	36 RSLH 66
20	3/8"	.050	72	3003 000 8621	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72
		.063	72	3003 001 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
				3003 000 9221	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	—	36 RS 72	—	36 RSK 72	36 RSL 72	36 RSLH 72
25	3/8"	.050	84	3003 000 5531	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84
		.063	85	3003 001 5631	36 RM3 85	36 RS3 85	36 RD3 85	36 RM 85	—	36 RS 85	—	36 RSK 85	36 RSL 85	36 RSLH 85
			84	3003 001 5631	36 RM3 84	36 RS3 84	36 RD3 84	36 RM 84	—	36 RS 84	—	36 RSK 84	36 RSL 84	36 RSLH 84

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8"	1210 642 1200 1210 642 1202	7 8	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
12	1/4" P	.043	64	●	3005 008 3405	●	STIHL PICCO™ Micro™ 3 71 PM3 64 3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
STIHL ROLLOMATIC® E MINI							
10	1/4" P	.043	56	●	3005 008 3403		71 PM3 56
12	1/4" P	.043	64	●	3005 008 3405		71 PM3 64
STIHL CARVING							
12	1/4" P	.043	64	●	3005 000 3105		71 PM3 64

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	1254 642 1200	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*						
Pitch						
Drive link gauge / groove width (Inch)						
Drive link count						
Guide bar part number						
● STIHL PICCO™ Micro™ 3						
STIHL ROLLOMATIC® E MINI						
12	1/4" P	.043	64	● 3005 008 3405	71 PM3 64 3670 005 0064	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Micro™ 3	
STIHL ROLLOMATIC® E MINI						
10	1/4"P	.043	56	● 3005 008 3403	71 PM3 56	
12	1/4"P	.043	64	● 3005 008 3405	71 PM3 64	
STIHL CARVING						
12	1/4"P	.043	64	● 3005 000 3105	71 PM3 64	

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4" P	1254 642 1200	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
12	1/4" P	.043	64		3005 008 3405	STIHL PICCO™ Micro™ 3	71 PM3 64 3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
10	1/4" P	.043	56		3005 008 3403	STIHL PICCO™ Micro™ 3	71 PM3 56

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/2" P	1252 642 1200**	6**	—	—	—
1/2" P	1252 642 1201***	7***	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

** THIS IS FOR MACHINES WITH SERIAL NUMBER FROM 4381 232 37

*** THIS IS FOR MACHINES WITH SERIAL NUMBER FROM 4381 232 37

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		
12	1/4" P	.043	64	●	3005 008 3405	STIHL PICCO™ Micro™ 3	71 PM3 64 3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		
10	1/4" P	.043	56	●	3005 008 3403	STIHL PICCO™ Micro™ 3	71 PM3 56
12	1/4" P	.043	64	●	3005 008 3405		71 PM3 64

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/2" P	1254 642 1200***	6***	—	—	—
1/4" P	4857 642 1202**	6**	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

** THIS IS FOR MACHINES WITH SERIAL NUMBER UP TO 4395 735 90

*** THIS IS FOR MACHINES WITH SERIAL NUMBER FROM 4395 754 01

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
						● STIHL PICCO™ Micro™ 3	
STIHL ROLLOMATIC® E MINI							
10	1/4" P	.043	56	●	3005 008 3403	71 PM3 56	3670 005 0056
12	1/4" P	.043	64	●	3005 008 3405	71 PM3 64	3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
						● STIHL PICCO™ Micro™ Mini 3	● STIHL PICCO™ Micro™ 5
STIHL ROLLOMATIC® E MINI							
12	3/8" P	.043	44	●	3005 000 3905	61 PMM3 44	-
14	1/4" P	.043	72	●	3005 008 3409	-	71 PM3 72
	3/8" P	.043	50	●	3005 008 3909	61 PMM3 50	-
				●	3005 000 3909	61 PMM3 50	-
16	3/8" P	.043	55	●	3005 008 3913	61 PMM3 55	-
STIHL ROLLOMATIC® E MINI LIGHT							
12	3/8" P	.043	44	●	3005 000 7605	61 PMM3 44	-
14	3/8" P	.043	50	●	3005 000 7609	61 PMM3 50	-
CARVING							
12	1/4" P	.043	64	●	3005 000 3105	-	71 PM3 64

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	1251 642 1200	6	-	-	-
	1250 642 1200	7	-	-	-
3/8" P	1250 642 1201	6	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
12	1/4" P	.043	64		3005 008 3405	●	STIHL PICCO™ Micro™ 3 71 PM3 64 3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
10	1/4" P	.043	56		3005 008 3403	●	STIHL PICCO™ Micro™ 3 71 PM3 56
12	1/4" P	.043	64		3005 008 3405	●	STIHL PICCO™ Micro™ 3 71 PM3 64
14	1/4" P	.043	72		3005 008 3409	●	STIHL PICCO™ Micro™ 3 71 PM3 72

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4" P	1251 642 1200	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI						
12	1/4" P	.043	65	3005 008 3405		71 PM3 65

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4" P	1252 642 1202	10	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Micro™ 3	
STIHL ROLLOMATIC® E MINI						
10	1/4" P	.043	56	● 3005 008 3403	71 PM3 56	3670 005 0056
12	1/4" P	.043	64	● 3005 008 3405	71 PM3 64	3670 005 0064
14	1/4" P	.043	72	● 3005 008 3409	71 PM3 72	3670 005 0072

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
				3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
12	3/8" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—	—	—
				3005 008 3909	61 PMM3 50	—	—	—	—	—
				3005 003 3909	61 PMM3 50	—	—	—	—	—
				3005 000 3909	61 PMM3 50	—	—	—	—	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—	—	—
CARVING										
12	1/4" P	.043	64	3005 000 3105	—	71 PM3 64	—	—	—	—

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4" P	1251 642 1200	6	—	—	—
3/8" P	1250 642 1200	7	—	—	—
3/8" P	1251 642 1201	5	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Super™ 3	
STIHL LIGHT 04						
14	3/8" P	.043	50	● 3005 000 4409	6l PM3 50	3699 005 0050
16	3/8" P	.043	55	● 3005 000 4413	6l PM3 55	3699 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Super 3
STIHL ROLLOMATIC® E MINI						
10	3/8" P	.043	39	3005 008 3903	6l PMM3 39	6l PS3 39
12	3/8" P	.043	44	3005 000 3905	6l PMM3 44	6l PS3 44
				3005 008 3905	6l PMM3 44	6l PS3 44
14	3/8" P	.043	50	3005 008 3909	6l PMM3 50	6l PS3 50
				3005 803 3909	6l PMM3 50	6l PS3 50
16	3/8" P	.043	55	3005 008 3913	6l PMM3 55	6l PS3 55
STIHL MINIBOSS						
16	3/8" P	.043	55	3005 811 3913	6l PMM3 55	6l PS3 55
STIHL ROLLOMATIC® E MINI LIGHT						
12	3/8" P	.043	44	3005 000 7605	6l PMM3 44	6l PS3 44
14	3/8" P	.043	50	3005 000 7609	6l PMM3 50	6l PS3 50
STIHL LIGHT 04						
12	3/8" P	.043	44	3005 000 4405	6l PMM3 44	6l PS3 44
14	3/8" P	.043	50	3005 000 4409	6l PMM3 50	6l PS3 50
16	3/8" P	.043	55	3005 000 4413	6l PMM3 55	6l PS3 55
18	3/8" P	.043	61	3005 000 4417	6l PMM3 61	6l PS3 61

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	1250 642 1201	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number		
					● STIHL PICCO™ Super™ 3	
STIHL ROLLOMATIC® E						
14	3/8" P	.050	50	● 3005 000 4809	63 PS3 50	3616 005 0050
16	3/8" P	.050	55	● 3005 008 4813	63 PS3 55	3616 005 0055
STIHL LIGHT 04						
14	3/8" P	.043	50	● 3005 000 4409	61 PS3 50	3699 005 0050
16	3/8" P	.043	55	● 3005 000 4413	61 PS3 55	3699 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Super
STIHL ROLLOMATIC® E									
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PS 44
14	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PS 50
16	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PS 55
16	3/8" P	.050	55	3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PS 55
STIHL ROLLOMATIC® E LIGHT									
12	3/8" P	.050	40	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PS 44
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PS 50
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PS 55

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	1251 642 1204	6	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Super™ 3	
STIHL LIGHT 04						
14	3/8" P	.043	50	● 3005 000 4409	61 PS3 50	3699 005 0050
16	3/8" P	.043	55	● 3005 000 4413	61 PS3 55	3699 005 0055

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	STIHL PICCO™ Super	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro	STIHL PICCO™ Micro 3
STIHL LIGHT 04									
12	3/8" P	.043	44	3005 000 4405	—	61 PS3 44	—	—	—
14	3/8" P	.043	50	3005 000 4409	—	61 PS3 50	—	—	—
16	3/8" P	.043	55	3005 000 4413	—	61 PS3 55	—	—	—
18	3/8" P	.043	61	3005 000 4417	—	61 PS3 61	—	—	—
STIHL ROLLOMATIC® E									
12	3/8" P	.050	44	3005 000 4805	63 PS 44	63 PS3 44	63 PD3 44	63 PM 44	—
14	3/8" P	.050	50	3005 000 4809	63 PS 50	63 PS3 50	63 PD3 50	63 PM 50	63 PM3 50
16	3/8" P	.050	55	3005 000 4813	63 PS 55	63 PS3 55	63 PD3 55	63 PM 55	63 PM3 55
STIHL ROLLOMATIC® E LIGHT									
12	3/8" P	.050	44	3005 000 7405	63 PS 44	63 PS3 44	63 PD3 44	63 PM 44	63 PM3 44
14	3/8" P	.050	50	3005 000 7409	63 PS 50	63 PS3 50	63 PD3 50	63 PM 50	63 PM3 50
16	3/8" P	.050	55	3005 000 7413	63 PS 55	63 PS3 55	63 PD3 55	63 PM 55	63 PM3 55

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	1251 642 1204	6	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Super™ 3	
STIHL ROLLOMATIC® E						
12	3/8" P	.043	44	● 3005 000 4405	61 PS3 44	3699 005 0044
		.050		● 3005 000 4805	63 PS3 44	3616 005 0044
14	3/8" P	.043	50	● 3005 000 4409	61 PS3 50	3699 005 0050
		.050		● 3005 000 4805	63 PS3 50	3616 005 0050
16	3/8" P	.043	55	● 3005 000 4413	61 PS3 55	3699 005 0055
		.050		● 3005 000 4805	63 PS3 55	3699 005 0055
STIHL ROLLOMATIC® E						
12	3/8" P	.050	44	● 3005 000 7405	63 PS3 44	
14	3/8" P	.050	50	● 3005 000 7409	63 PS3 50	
16	3/8" P	.050	55	● 3005 000 7413	63 PS3 55	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E									
12	3/8" P	.043	44	 3005 000 4405	—	—	61 PS3 44	—	—
		.050		 3005 000 4805	—	63 PM3 44	63 PS3 44	—	—
14	3/8" P	.043	50	 3005 000 4409	—	—	61 PS3 50	—	—
		.050		 3005 000 4809	—	63 PM3 50	63 PS3 50	—	—
16	3/8" P	.043	55	 3005 008 4413	—	—	61 PS3 55	—	—
		.050		 3005 008 4813	—	63 PM3 55	63 PS3 55	—	—
STIHL ROLLOMATIC® E LIGHT									
12	3/8" P	.050	40	 3005 000 7405	—	63 PM3 44	63 PS3 44	—	—
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	—	—
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	—	—

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	MAOI 640 2001	6	—	—	—

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ 3	
STIHL LIGHT 04						
16	.325"	.050	67	3003 000 3313	23 RS3 67 3694 005 0067	
18	.325"	.050	74	3003 008 3317	23 RS3 74 3694 005 0074	
20	.325"	.050	81	3003 008 3321	23 RS3 81 3694 005 0081	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	"STIHL RAPID™ Duro 3"	"STIHL RAPID™ Micro"	"STIHL RAPID™ Micro 3"	"STIHL RAPID™ Super"	"STIHL RAPID™ Super 3"
STIHL DUROMATIC® E									
16	.325"	.050	67	3003 000 8613	23 RD3 67	23 RM 67	23 RM3 67	23 RS 67	23 RS3 67
STIHL LIGHT 04									
14	.325"	.050	60	3003 000 3309	23 RD3 60	23 RM 60	23 RM3 60	23 RS 60	23 RS3 60
16	.325"	.050	67	3003 000 3313	23 RD3 67	23 RM 67	23 RM3 67	23 RS 67	23 RS3 67
18	.325"	.050	74	3003 008 3317	23 RD3 74	23 RM 74	23 RM3 74	23 RS 74	23 RS3 74
20	.325"	.050	81	3003 008 3321	23 RD3 81	23 RM 81	23 RM3 81	23 RS 81	23 RS3 81

MSA 220 TC | MSA 300.0 C

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
.325"	MA02 160 2400	8	MA02 007 2500	0000 642 1234	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number					
10	1/4" P	.043	56	3005 008 3403					STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI									
71	PM3	56							3670 005 0056

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS						
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™
STIHL ROLLOMATIC® E											
12	3/8" P	.050	44	3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—
14	1/4" P	.050	72	3005 000 6409	—	—	—	—	—	—	13 RM 72
	3/8" P	.050	50	3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—
16	3/8" P	.050	55	3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—
				3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—
18	3/8" P	.050	61	3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	—
STIHL ROLLOMATIC® E LIGHT											
12	3/8" P	.050	44	3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	—
14	3/8" P	.050	50	3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	—
16	3/8" P	.050	55	3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	—
STIHL ROLLOMATIC® E MINI											
12	1/4" P	.043	44	3005 008 3405	—	71 PM3 64	—	—	—	—	—
	3/8" P	.043	44	3005 000 3905	61 PMM3 44	—	—	—	—	—	—
	1/4" P	.043	72	3005 008 3409	—	71 PM3 72	—	—	—	—	—
14	3/8" P	.043	50	3005 008 3909	61 PMM3 50	—	—	—	—	—	—
				3005 003 3909	61 PMM3 50	—	—	—	—	—	—
				3005 000 3909	61 PMM3 50	—	—	—	—	—	—
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	—	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT											
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	—	—	—	—	—	—
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	—	—	—	—	—	—

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4"	4138 640 2000	8	—	—	—
1/2" P	0000 640 2001	8	—	—	—
3/8" P	0000 640 2002	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS					
Guide bar length (inches)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number		STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super
STIHL ROLLOMATIC® E											
12	3/8" P	.050	44	3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	
14	3/8" P	.050	50	3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	
16	3/8" P	.050	55	3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	
			56	3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	
			56	3005 000 4813	–	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	
18	3/8" P	.050	61	3005 000 4817	–	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61	
STIHL ROLLOMATIC® E LIGHT											
12	3/8" P	.050	44	3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44	
14	3/8" P	.050	50	3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50	
16	3/8" P	.050	55	3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	
STIHL ROLLOMATIC® E MINI											
10	1/4" P	.043	56	3005 008 3403	–	71 PM3 56	–	–	–	–	–
12	1/4" P	.043	64	3005 008 3405	–	71 PM3 64	–	–	–	–	–
	3/8" P	.043	44	3005 000 3905	61 PMM3 44	–	–	–	–	–	–
14	1/4" P	.043	72	3005 008 3409	–	71 PM3 72	–	–	–	–	–
	3/8" P	.043	50	3005 008 3909	61 PMM3 50	–	–	–	–	–	–
				3005 000 3909	61 PMM3 50	–	–	–	–	–	–
			51	3005 008 3909	61 PMM3 51	–	–	–	–	–	–
				3005 000 3909	61 PMM3 51	–	–	–	–	–	–
	3/8" P	.043	55	3005 008 3913	61 PMM3 55	–	–	–	–	–	–
STIHL ROLLOMATIC® E MINI LIGHT											
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	–	–	–	–	–	–
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	–	–	–	–	–	–

HT 56 C I
HT 70, HT 70 K, HT 75

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	0000 640 2001	8	–	–	–
3/8" P	0000 640 2002	6	–	–	–
	4138 642 1201	6	–	–	–
	0000 640 2003	7	–	–	–
	1206 642 1301	7	–	–	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	● 3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	● 3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	● 3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56	● 3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56	● 3005 000 4813	–	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
18	3/8" P	.050	61	● 3005 000 4817	–	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	● 3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	● 3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	● 3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
12	3/8" P	.043	44	● 3005 000 3905	6l PMM3 44	–	–	–	–	–
14	3/8" P	.043	50	● 3005 008 3909	6l PMM3 50	–	–	–	–	–
			51	● 3005 000 3909	6l PMM3 50	–	–	–	–	–
			51	● 3005 008 3909	6l PMM3 51	–	–	–	–	–
			51	● 3005 000 3909	6l PMM3 51	–	–	–	–	–
16	3/8" P	.043	55	● 3005 008 3913	6l PMM3 55	–	–	–	–	–
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	● 3005 000 7605	6l PMM3 44	–	–	–	–	–
14	3/8" P	.043	50	● 3005 000 7609	6l PMM3 50	–	–	–	–	–

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8" P	0000 640 2002 0000 640 2003	6 7	– –	– –	– –

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	 3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			 3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	
			 3005 000 4813	–	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	 3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
10	1/4" P	.043	56	 3005 008 3403	–	71 PM3 56	–	–	–	–
12	1/4" P	.043	64	 3005 008 3405	–	71 PM3 64	–	–	–	–
	3/8" P	.043	44	 3005 000 3905	6l PMM3 44	–	–	–	–	–
14	1/4" P	.043	72	 3005 008 3409	–	71 PM3 72	–	–	–	–
			 3005 008 3909	6l PMM3 50	–	–	–	–	–	
	3/8" P	.043	50	 3005 000 3909	6l PMM3 50	–	–	–	–	–
			 3005 008 3909	6l PMM3 51	–	–	–	–	–	
			 3005 000 3909	6l PMM3 51	–	–	–	–	–	
16	3/8" P	.043	55	 3005 008 3913	6l PMM3 55	–	–	–	–	–
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	 3005 000 7605	6l PMM3 44	–	–	–	–	–
14	3/8" P	.043	50	 3005 000 7609	6l PMM3 50	–	–	–	–	–

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	0000 640 2001	8	–	–	–
3/8" P	0000 640 2002	6	–	–	–
3/8" P	0000 640 2003	7	–	–	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI							
12	3/4" P	.043	64		3005 008 3405		71 PM3 64 3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super
STIHL ROLLOMATIC® E											
12	3/4" P	.050	44		3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/4" P	.050	50		3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
			55		3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
16	3/4" P	.050			3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56		3005 000 4813	–	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
STIHL ROLLOMATIC® E LIGHT											
12	3/4" P	.050	44		3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/4" P	.050	50		3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/4" P	.050	55		3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI											
10	1/4" P	.043	56		3005 008 3403	–	71 PM3 56	–	–	–	–
12	3/4" P	.043	44		3005 000 3905	61 PMM3 44	–	–	–	–	–
	1/4" P	.043	72		3005 008 3409	–	71 PM3 72	–	–	–	–
			50		3005 008 3909	61 PMM3 50	–	–	–	–	–
					3005 000 3909	61 PMM3 50	–	–	–	–	–
					3005 008 3909	61 PMM3 51	–	–	–	–	–
					3005 000 3909	61 PMM3 51	–	–	–	–	–
16	3/4" P	.043	55		3005 008 3913	61 PMM3 55	–	–	–	–	–
STIHL ROLLOMATIC® E MINI LIGHT											
12	3/4" P	.043	44		3005 000 7605	61 PMM3 44	–	–	–	–	–
14	3/4" P	.043	50		3005 000 7609	61 PMM3 50	–	–	–	–	–

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	0000 640 2001	8	–	–	–
3/8" P	0000 640 2002	6	–	–	–
	0000 640 2003	7	–	–	–

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ 3	
STIHL ROLLOMATIC® E MINI						
12	1/4" P	.043	64	3005 008 3405	71 PM3 64 3670 005 0064	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
			55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
16	3/8" P	.050	55	 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56	 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
10	1/4" P	.043	56	 3005 008 3403	—	71 PM3 56	—	—	—	—
12	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—
14	1/4" P	.043	72	 3005 008 3409	—	71 PM3 72	—	—	—	—
			50	 3005 008 3909	61 PMM3 50	—	—	—	—	—
	 3005 000 3909	61 PMM3 50		—	—	—	—	—		
	51	 3005 008 3909		61 PMM3 51	—	—	—	—	—	
		 3005 000 3909	61 PMM3 51	—	—	—	—	—		
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	0000 640 2001	8	–	–	–
3/8" P	0000 640 2002	6	–	–	–
	0000 640 2003	7	–	–	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number					
12	3/8" P	.043	64	● 3005 008 3405					● STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI									
12	3/8" P	.043	64	● 3005 008 3405					71 PM3 64 3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Micro™ Mini 3	● STIHL PICCO™ Micro™ 3	● STIHL PICCO™ Super 3	● STIHL PICCO™ Duro 3	● STIHL PICCO™ Micro™	● STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	● 3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	● 3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
			55	● 3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
16	3/8" P	.050		● 3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56	● 3005 000 4813	–	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	● 3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	● 3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	● 3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
10	1/4" P	.043	56	● 3005 008 3403	–	71 PM3 56	–	–	–	–
12	3/8" P	.043	44	● 3005 000 3905	61 PMM3 44	–	–	–	–	–
	1/4" P	.043	72	● 3005 008 3409	–	71 PM3 72	–	–	–	–
				● 3005 008 3909	61 PMM3 50	–	–	–	–	–
14	3/8" P	.043	50	● 3005 003 3909	61 PMM3 50	–	–	–	–	–
				● 3005 000 3909	61 PMM3 50	–	–	–	–	–
16	3/8" P	.043	55	● 3005 008 3913	61 PMM3 55	–	–	–	–	–
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	● 3005 000 7605	61 PMM3 44	–	–	–	–	–
14	3/8" P	.043	50	● 3005 000 7609	61 PMM3 50	–	–	–	–	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	0000 640 2001	8	—	—	—
3/8" P	0000 640 2002	6	—	—	—
	0000 640 2003	7	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
				 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
16	3/8" P	.050	55	 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56	 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
10	1/4" P	.043	56	 3005 008 3403	—	71 PM3 56	—	—	—	—
12	1/4" P	.043	64	 3005 008 3405	—	71 PM3 64	—	—	—	—
	3/8" P	.043	44	 3005 000 3905	6l PMM3 44	—	—	—	—	—
14	1/4" P	.043	72	 3005 008 3409	—	71 PM3 72	—	—	—	—
	3/8" P	.043	50	 3005 008 3909	6l PMM3 50	—	—	—	—	—
			 3005 000 3909	6l PMM3 50	—	—	—	—	—	—
			 3005 008 3909	6l PMM3 5l	—	—	—	—	—	—
			 3005 000 3909	6l PMM3 5l	—	—	—	—	—	—
16	3/8" P	.043	55	 3005 008 3913	6l PMM3 55	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	 3005 000 7605	6l PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	6l PMM3 50	—	—	—	—	—

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	0000 640 2001	8	—	—	—
3/8" P	0000 640 2002	6	—	—	—
3/8" P	0000 640 2003	7	—	—	—

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS			
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number				
14	3/8" P	.043	50		3005 008 3909	●	STIHL PICCO™ Micro™ Mini 3		61 PMM3 50 3610 005 0050

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E											
12	3/8" P	.050	44		3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50		3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55		3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
					3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56		3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
STIHL ROLLOMATIC® E LIGHT											
12	3/8" P	.050	44		3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50		3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55		3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI											
12	3/8" P	.043	44		3005 000 3905	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50		3005 008 3909	61 PMM3 50	—	—	—	—	—
			51		3005 008 3909	61 PMM3 51	—	—	—	—	—
16	3/8" P	.043	55		3005 008 3913	61 PMM3 55	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT											
12	3/8" P	.043	44		3005 000 7605	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50		3005 000 7609	61 PMM3 50	—	—	—	—	—

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	0000 640 2001	8	–	–	–
3/8" P	0000 640 2002	6	–	–	–
	0000 640 2003	7	–	–	–

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number					
									STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI									
14	1/4" P	.043	72	3005 008 3409					71 PM3 72 3670 005 0072

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Super 3	STIHL PICCO™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
			55	3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
16	3/8" P	.050		3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56	3005 000 4813	–	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
10	1/4" P	.043	56	3005 008 3403	–	71 PM3 56	–	–	–	–
			64	3005 008 3405	–	71 PM3 64	–	–	–	–
12	1/4" P	.043	44	3005 000 3905	61 PMM3 44	–	–	–	–	–
			50	3005 008 3909	61 PMM3 50	–	–	–	–	–
				3005 000 3909	61 PMM3 50	–	–	–	–	–
14	3/8" P	.043	51	3005 008 3909	61 PMM3 51	–	–	–	–	–
				3005 000 3909	61 PMM3 51	–	–	–	–	–
16	3/8" P	.043	55	3005 008 3913	61 PMM3 55	–	–	–	–	–
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	3005 000 7605	61 PMM3 44	–	–	–	–	–
14	3/8" P	.043	50	3005 000 7609	61 PMM3 50	–	–	–	–	–

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	0000 640 2001	8	–	–	–
3/8" P	0000 640 2002	6	–	–	–
	0000 640 2003	7	–	–	–

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number					
									STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI									
14	3/8" P	.043	50	3005 008 3909					61 PMM3 50 33610 005 0050

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	
			 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
10	1/4" P	.043	56	 3005 008 3403	—	71 PM3 56	—	—	—	—
12	1/4" P	.043	64	 3005 008 3405	—	71 PM3 64	—	—	—	—
	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—
				 3005 003 3909	61 PMM3 50	—	—	—	—	—
				 3005 000 3909	61 PMM3 50	—	—	—	—	—
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	0000 640 2001	8	–	–	–
3/8" P	0000 640 2002	6	–	–	–
	0000 640 2003	7	–	–	–

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number					
14	3/8" P	.043	50	3005 008 3909					STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI									
14	3/8" P	.043	50	3005 008 3909					61 PMM3 50 3610 005 0050

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55	
			 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56	
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
10	1/4" P	.043	56	 3005 008 3403	—	71 PM3 56	—	—	—	—
12	1/4" P	.043	64	 3005 008 3405	—	71 PM3 64	—	—	—	—
	3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—
				 3005 003 3909	61 PMM3 50	—	—	—	—	—
				 3005 000 3909	61 PMM3 50	—	—	—	—	—
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4" P	0000 640 2001	8	–	–	–
3/8" P	0000 640 2002	6	–	–	–
	0000 640 2003	7	–	–	–

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		
14	3/8" P	.043	50		3005 008 3909	●	STIHL PICCO™ Micro™ Mini 3
STIHL ROLLOMATIC® E MINI							
14	3/8" P	.043	50		3005 008 3909		61 PMM3 50 3610 005 0050

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number						
						●	STIHL PICCO™ Micro™ Mini 3	●	STIHL PICCO™ Micro™ 3	●	STIHL PICCO™ Super 3
						●	STIHL PICCO™ Duro 3	●	STIHL PICCO™ Micro™	●	STIHL PICCO™ Super
STIHL ROLLOMATIC® E											
12	3/8" P	.050	44	●	3005 000 4805	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	●	3005 000 4809	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
			55	●	3005 000 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
16	3/8" P	.050	56	●	3005 008 4813	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56	●	3005 000 4813	–	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
18	3/8" P	.050	61	●	3005 000 4817	–	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E LIGHT											
12	3/8" P	.050	44	●	3005 000 7405	–	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	●	3005 000 7409	–	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	●	3005 000 7413	–	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI											
12	3/8" P	.043	44	●	3005 000 3905	61 PMM3 44	–	–	–	–	–
			50	●	3005 008 3909	61 PMM3 50	–	–	–	–	–
14	3/8" P	.043	51	●	3005 008 3909	61 PMM3 51	–	–	–	–	–
16	3/8" P	.043	55	●	3005 008 3913	61 PMM3 55	–	–	–	–	–
STIHL ROLLOMATIC® E MINI LIGHT											
12	3/8" P	.043	44	●	3005 000 7605	61 PMM3 44	–	–	–	–	–
14	3/8" P	.043	50	●	3005 000 7609	61 PMM3 50	–	–	–	–	–

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
3/8" P	0000 640 2002 0000 640 2003	6 7	– –	– –	– –

WARNING: THE SAW CHAINS HIGHLIGHTED IN YELLOW MAY BE CAPABLE OF SEVERE KICKBACK THAT COULD RESULT IN SERIOUS INJURY TO THE USER. THEY ARE ONLY FOR USERS WITH EXTRAORDINARY CUTTING NEEDS AND EXPERIENCE AND SPECIALIZED TRAINING FOR DEALING WITH KICKBACK. SAW CHAINS WITH REDUCED KICKBACK POTENTIAL ARE AVAILABLE.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Micro™ Mini 3	
STIHL ROLLOMATIC® E MINI						
10	1/4" P	.043	56	● 3005 008 3403	71 PM3 56 3670 005 0056	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Micro™ Mini 3	● STIHL PICCO™ Micro™ 3	● STIHL PICCO™ Super 3	● STIHL PICCO™ Duro 3	● STIHL PICCO™ Micro™	● STIHL PICCO™ Super
STIHL ROLLOMATIC® E LIGHT										
10	1/4" P	.043	56	● 3005 008 3403	-	71 PM3 56	-	-	-	-
12	1/4" P	.043	64	● 3005 008 3405	-	71 PM3 64	-	-	-	-

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/4" P	LA02 642 1200	8	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
						●	STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI							
10	1/4" P	.043	56	●	3005 008 3403	71 PM3 56	3670 005 0056
12	1/4" P	.043	64	●	3005 008 3405	71 PM3 64	3670 005 0064

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		
						●	STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI							
10	1/4" P	.043	56	●	3005 008 3403	71 PM3 56	
12	1/4" P	.043	64	●	3005 008 3405	71 PM3 64	
14	1/4" P	.043	72	●	3005 008 3409	71 PM3 72	

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4" P	4857 642 1202	6	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI							
10	1/4" P	.043	56		3005 008 3403	71 PM3 56	3670 005 0056

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count		Guide bar part number		STIHL PICCO™ Micro™ 3
STIHL ROLLOMATIC® E MINI							
10	1/4" P	.043	56		3005 008 3403	71 PM3 56	
12	1/4" P	.043	64		3005 008 3405	71 PM3 64	

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/2" P	4857 642 1202	6	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS				
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number					
10	3/8" P	.043	39	3005 008 3903	STIHL PICCO™ Micro™ 3	61 PM3 39	3610 005 0039		

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS					
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	Guide bar part number	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
STIHL ROLLOMATIC® E										
12	3/8" P	.050	44	 3005 000 4805	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 4809	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 008 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
				 3005 000 4813	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
			56	 3005 000 4813	—	63 PM3 56	63 PS3 56	63 PD3 56	63 PM 56	63 PS 56
18	3/8" P	.050	61	 3005 000 4817	—	63 PM3 61	63 PS3 61	63 PD3 61	63 PM 61	63 PS 61
STIHL ROLLOMATIC® E LIGHT										
12	3/8" P	.050	44	 3005 000 7405	—	63 PM3 44	63 PS3 44	63 PD3 44	63 PM 44	63 PS 44
14	3/8" P	.050	50	 3005 000 7409	—	63 PM3 50	63 PS3 50	63 PD3 50	63 PM 50	63 PS 50
16	3/8" P	.050	55	 3005 000 7413	—	63 PM3 55	63 PS3 55	63 PD3 55	63 PM 55	63 PS 55
STIHL ROLLOMATIC® E MINI										
10	1/4" P	.043	56	 3005 008 3403	—	71 PM3 56	—	—	—	—
12	1/4" P	.043	64	 3005 008 3405	—	71 PM3 64	—	—	—	—
		3/8" P	.043	44	 3005 000 3905	61 PMM3 44	—	—	—	—
14	3/8" P	.043	50	 3005 008 3909	61 PMM3 50	—	—	—	—	—
				 3005 003 3909	61 PMM3 50	—	—	—	—	—
				 3005 000 3909	61 PMM3 50	—	—	—	—	—
16	3/8" P	.043	55	 3005 008 3913	61 PMM3 55	—	—	—	—	—
STIHL ROLLOMATIC® E MINI LIGHT										
12	3/8" P	.043	44	 3005 000 7605	61 PMM3 44	—	—	—	—	—
14	3/8" P	.043	50	 3005 000 7609	61 PMM3 50	—	—	—	—	—

CHAIN SPROCKETS

 Chain pitch (Inch)	 Spur sprocket	 Number of sprocket teeth	 Rim sprocket kit	 Rim sprocket	 Number of sprocket teeth
1/2" P	0000 640 2001	8	–	–	–
3/8" P	0000 640 2002	6	–	–	–
	0000 640 2003	7	–	–	–

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		STIHL PICCO™ Micro™ Mini 3
STIHL ROLLOMATIC® E MINI							
10	3/8" P	.043	39		3005 008 3903		61 PMM3 39 3610 005 0039

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		STIHL PICCO™ Micro™ Mini 3
STIHL ROLLOMATIC® E MINI							
10	3/8" P	.043	39		3005 008 3903		61 PMM3 39
12	3/8" P	.043	44		3005 000 3905		61 PMM3 44
	3/8" P	.043	44		3005 008 3905		61 PMM3 44
14	3/8" P	.043	50		3005 008 3909		61 PMM3 50
	3/8" P	.043	50		3005 803 3909		61 PMM3 50
16	3/8" P	.043	55		3005 008 3913		61 PMM3 55
STIHL ROLLOMATIC® E MINI LIGHT							
12	3/8" P	.043	44		3005 000 7605		61 PMM3 44
14	3/8" P	.043	50		3005 000 7609		61 PMM3 50

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4" P	0000 640 2001	8	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		
10	3/8" P	.043	39		3005 008 3903	●	STIHL PICCO™ Micro™ Mini 3
STIHL ROLLOMATIC® E MINI						61 PMM3 39 3610 005 0039	

OPTIONAL STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS						SAW CHAINS	
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count		Guide bar part number		
10	3/8" P	.043	39		3005 008 3903	●	STIHL PICCO™ Micro™ Mini 3
STIHL ROLLOMATIC® E MINI							
12	3/8" P	.043	44		3005 000 3905		61 PMM3 44
	3/8" P	.043	44		3005 008 3905		61 PMM3 44
14	3/8" P	.043	50		3005 008 3909		61 PMM3 50
	3/8" P	.043	50		3005 803 3909		61 PMM3 50
16	3/8" P	.043	55		3005 008 3913		61 PMM3 55
STIHL ROLLOMATIC® E MINI LIGHT							
12	3/8" P	.043	44		3005 000 7605		61 PMM3 44
14	3/8" P	.043	50		3005 000 7609		61 PMM3 50

HTA 150.0 | HTA 160.0

CHAIN SPROCKETS

Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
3/8" P	0000 640 2001	8	—	—	—

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

COMMON STIHL GUIDE BARS & SAW CHAINS

GUIDE BARS					SAW CHAINS	
Guide bar length (Inch)*	Pitch	Drive link gauge / groove width (Inch)	Drive link count	Guide bar part number	● STIHL PICCO™ Micro™ 3	
STIHL LIGHT						
4	1/4" P	.043	28	● 3007 003 0101	71 PM3 3670 005 0028	

CHAIN SPROCKETS

					
Chain pitch (Inch)	Spur sprocket	Number of sprocket teeth	Rim sprocket kit	Rim sprocket	Number of sprocket teeth
1/4" P	GA01 007 2600	6	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.



EQUIPMENT BRAND	MODEL NUMBER	BAR SIZE	STIHL SAW CHAIN EQUIVALENT	STIHL MARKETING NAME	PITCH	GAUGE	DRIVE LINK COUNT
Atlas	56938 (40V)	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
Atlas	56937(80V)	18"	3636 005 0062	63 PM3 62	$\frac{3}{8}$ " Picco	0.050"	62
Black + Decker	LLP120B	6"	3660 005 0042	13 RM 42	$\frac{1}{4}$ "	0.050"	42
Black + Decker	LCS1240B (40V)	12"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
Black + Decker	BCASCS60B (20V) Chainsaw Attachment	10"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	40
Black + Decker	LCS1020B (20V)	10"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	40
Craftsman	CMCCSL621 (Chainsaw Lopper 20V)	6"	3660 005 0042	13 RM 42	$\frac{1}{4}$ "	0.050"	42
Craftsman	CMCCSP20 (20V) Pole Saw	8"	3610 005 0034	61 PMM3 34	$\frac{3}{8}$ " Picco	0.043"	34
Craftsman	CMCCS620 (20V)	12"	3610 005 0045	61 PMM3 45	$\frac{3}{8}$ " Picco	0.043"	45
Craftsman	CMCCS660	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
DeWALT	DCCS620 (20V)	8"	3610 005 0034	61 PMM3 34	$\frac{3}{8}$ " Picco	0.043"	34
DeWALT	DCPS620B (20V)	8"	3610 005 0034	61 PMM3 34	$\frac{3}{8}$ " Picco	0.043"	34
DeWALT	DCCS620PI (20V)	12"	3610 005 0045	61 PMM3 45	$\frac{3}{8}$ " Picco	0.043"	45
DeWALT	DCCS670B (60V)	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
ECHO	CCS-58V (58V)	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
EGO	CS1400 (56V)	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
EGO	CS1600 (56V)	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
EGO	CS1800 (56V)	18"	3636 005 0062	63 PM3 62	$\frac{3}{8}$ " Picco	0.050"	62
GreenWorks	PS60L00 (60V) Pole Saw	10"	3660 005 0058	13 RM 58	$\frac{1}{4}$ "	0.050"	58
GreenWorks	PS60L210 (60V) Pole Saw	10"	3660 005 0058	13 RM 58	$\frac{1}{4}$ "	0.050"	58
GreenWorks	1400602 (80V) Pole Saw	10"	3660 005 0058	13 RM 58	$\frac{1}{4}$ "	0.050"	58
GreenWorks	2012802 (40V)	14"	3610 005 0052	61 PMM3-52	$\frac{3}{8}$ " Picco	0.043"	52
GreenWorks	2012802 (40V)	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
GreenWorks	2007402 (48V)	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
GreenWorks	20312 (40V) G-MAX	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
GreenWorks	2016802AZ (40V)	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
GreenWorks	20322 (40V) G-MAX	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
GreenWorks	20352 (24V) Pole Saw	8"	3636 005 0033	63 PM3 33	$\frac{3}{8}$ " Picco	0.050"	33
GreenWorks	20672 (40V) G-MAX Pole Saw	8"	3636 005 0033	63 PM3 33	$\frac{3}{8}$ " Picco	0.050"	33
GreenWorks	20302 (40V)	8"	3636 005 0033	63 PM3 33	$\frac{3}{8}$ " Picco	0.050"	33
GreenWorks	1403702 (40V)	8"	3636 005 0033	63 PM3 33	$\frac{3}{8}$ " Picco	0.050"	33
GreenWorks	2000102 (24V)	10"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
GreenWorks	20362 (24V)	10"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
GreenWorks	20262 (40V) G-MAX	12"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
GreenWorks	20292 (40V)	12"	3636 005 0045	63 PM3 45	$\frac{3}{8}$ " Picco	0.050"	45
GreenWorks	2000902 (40V) G-MAX	14"	3636 005 0052	63 PM3 52	$\frac{3}{8}$ " Picco	0.050"	52
GreenWorks	CS60L00 (60V)	16"	3636 005 0056	63 PM3 56	$\frac{3}{8}$ " Picco	0.050"	56
GreenWorks	CS60L210 (60V)	16"	3636 005 0056	63 PM3 56	$\frac{3}{8}$ " Picco	0.050"	56
GreenWorks	2015402 (60V) PRO	16"	3636 005 0056	63 PM3 56	$\frac{3}{8}$ " Picco	0.050"	56
GreenWorks	2014502 (60V) PRO	16"	3636 005 0056	63 PM3 56	$\frac{3}{8}$ " Picco	0.050"	56
GreenWorks	2004502 (80V)	16"	3636 005 0056	63 PM3 56	$\frac{3}{8}$ " Picco	0.050"	56
GreenWorks	CS80L01 (80V)	16"	3636 005 0056	63 PM3 56	$\frac{3}{8}$ " Picco	0.050"	56
GreenWorks	2000402 (80V)	18"	3636 005 0062	63 PM3 62	$\frac{3}{8}$ " Picco	0.050"	62
GreenWorks	GCS80420 (80V)	18"	3616 005 0062	63 PS3 62	$\frac{3}{8}$ " Picco	0.050"	62
Hart	HLC5011 (40V0)	14"	3636 005 0052	63 PM3 52	$\frac{3}{8}$ " Picco	0.050"	52
Husqvarna	T536Li XP (36V)	12"	3610 005 0045	61 PMM3 45	$\frac{3}{8}$ " Picco	0.043"	45
Husqvarna	535i XP (36V)	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
Husqvarna	T535i XP (36V)	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
Husqvarna	536Li XP (36V)	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
Husqvarna	115iPT4	10"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
Husqvarna	536LiP4	10"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
Husqvarna	530iP4	10"	3636 005 0040	63PM3-40	$\frac{3}{8}$ " Picco	0.050"	40
Husqvarna	530iPT5	10"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
Husqvarna	536LiPT5	10"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
Husqvarna	120i (36V)	14"	3636 005 0052	63 PM3 52	$\frac{3}{8}$ " Picco	0.050"	52
Kobalt	KPS 1080B-06 (80V)	10"	3660 005 0058	13 RM 58	$\frac{1}{4}$ "	0.050"	58
Kobalt	KCS 1224A-03	12"	3610 005 0045	61 PMM3 45	$\frac{3}{8}$ " Picco	0.043"	45
Kobalt	KCS 1440-06 (40V)	14"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
Kobalt	KPS 80-08 (40V)	8"	3636 005 0033	63 PM3 33	$\frac{3}{8}$ " Picco	0.050"	33
Kobalt	KCS120 (40V)	12"	3636 005 0045	63 PM3 45	$\frac{3}{8}$ " Picco	0.050"	45
Kobalt	KCS180B (80V)	18"	3636 005 0062	63 PM3 62	$\frac{3}{8}$ " Picco	0.050"	62
Kobalt	KCS 4080-06	18"	3636 005 0062	63 PM3 62	$\frac{3}{8}$ " Picco	0.050"	62
Makita	XCU06Z (18V) LXT	10"	3610 005 0040	61 PMM3 40	$\frac{3}{8}$ " Picco	0.043"	40

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

EQUIPMENT BRAND	MODEL NUMBER	BAR SIZE	STIHL SAW CHAIN EQUIVALENT	STIHL MARKETING NAME	PITCH	GAUGE	DRIVE LINK COUNT
Makita	HCU02C1 (36V)	12"	3610 005 0046	61 PMM3 46	$\frac{3}{8}$ " Picco	0.043"	46
Makita	XCU02Z (36V) LXT	12"	3610 005 0046	61 PMM3 46	$\frac{3}{8}$ " Picco	0.043"	46
Makita	XCU08Z (36V) LXT	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
Makita	XCU07Z (36V) LXT	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
Makita	XCU03Z (36V) LXT	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
Makita	XCU09Z (36V) LXT	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
Makita	XCU04Z (36V) LXT	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
Makita	EY401MP	10"	3636 005 0050	63 PM3 50	$\frac{3}{8}$ " Picco	0.050"	50
Milwaukee	49-16-2720	10"	3610 005 0040	61 PMM3 40	$\frac{3}{8}$ " Picco	0.043"	40
Milwaukee	2727-20 / M18 FUEL REDLITHIUM (18V)	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
Milwaukee	2727-21HD (18V)	16"	3610 005 0056	61 PMM3 56	$\frac{3}{8}$ " Picco	0.043"	56
Oregon	CS300 (40V)	16"	3636 005 0056	63 PM3 56	$\frac{3}{8}$ " Picco	0.050"	56
Ryobi	P4360 (18V) Pole saw	8"	3610 005 0033	61 PMM3 33	$\frac{3}{8}$ " Picco	0.043"	33
Ryobi	RY40050 (40V) Pole Saw	8"	3610 005 0033	61 PMM3 33	$\frac{3}{8}$ " Picco	0.043"	33
Ryobi	P548A (18V)	12"	3610 005 0045	61 PMM3 45	$\frac{3}{8}$ " Picco	0.043"	45
Ryobi	P546A (18V)	10"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
Ryobi	RY15520 (40V) Attachment only	10"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
Ryobi	RY40503BTL (40V)	14"	3636 005 0052	63 PM3 52	$\frac{3}{8}$ " Picco	0.050"	52
Ryobi	RY40502B	14"	3636 005 0052	63 PM3 52	$\frac{3}{8}$ " Picco	0.050"	52
Ryobi	RY40550 (40V)	16"	3636 005 0056	63 PM3 56	$\frac{3}{8}$ " Picco	0.050"	56
Snapper	1697196 (48V)	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52
Snapper	SXDCS82 (82V) 1696773	18"	3636 005 0062	63 PM3 62	$\frac{3}{8}$ " Picco	0.050"	62
Wen	40421 (40V) Pole Saw	10"	3636 005 0040	63 PM3 40	$\frac{3}{8}$ " Picco	0.050"	40
Wen	40417BT (40V)	16"	3636 005 0056	63 PM3 56	$\frac{3}{8}$ " Picco	0.050"	56
Worx	WG320 ("JawSaw" 20V)	6"	3660 000 0042	13 RM 42	$\frac{1}{4}$ "	0.050"	42
Worx	WG322 (20V)	10"	3610 005 0040	61 PMM3 40	$\frac{3}{8}$ " Picco	0.043"	40
Worx	WG380 (40V)	12"	3610 005 0045	61 PMM3 45	$\frac{3}{8}$ " Picco	0.043"	45
Worx	WG384 (40V)	14"	3610 005 0052	61 PMM3 52	$\frac{3}{8}$ " Picco	0.043"	52

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.



GUIDE BARS				SAW CHAINS																
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count	 STHL PICCO™ Micro™ 3	 STHL PICCO™ Super 3	 STHL PICCO™ Duro 3	 STHL RAPID™ Micro™ 3	 STHL RAPID™ Super 3	 STHL RAPID™ Duro 3	 STHL PICCO™ Micro™	 STHL PICCO™ Super	 STHL RAPID™ Micro™	 STHL RAPID™ Micro™ F	 STHL RAPID™ Super	 STHL RAPID™ Super F	 STHL RAPID™ Super K	 STHL RAPID™ Super L	 STHL RAPID™ Super LH	 STHL RAPID™ Super LF	
CS-3916																				
14	3/8" P	.050	52	63 PM 3 52	63 PS 3 52	63 PD 3 52	-	-	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	-	
			57	63 PM 3 57	63 PS 3 57	63 PD 3 57	-	-	-	63 PM 57	63 PS 57	-	-	-	-	-	-	-	-	
16	3/8" P	.050	58	63 PM 3 58	63 PS 3 58	63 PD 3 58	-	-	-	63 PM 58	63 PS 58	-	-	-	-	-	-	-	-	
			62	63 PM 3 62	63 PS 3 62	63 PD 3 62	-	-	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-	-	
18	3/8" P	.050	62	63 PM 3 62	63 PS 3 62	63 PD 3 62	-	-	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-	-	
CS-5018, CS-5220																				
16	.325	.050	66	-	-	-	23 RM 3 66	-	23 RD 3 66	-	-	23 RM 66	-	23 RS 66	-	-	-	-	-	
18	.325	.050	72	-	-	-	23 RM 3 72	-	23 RD 3 72	-	-	23 RM 72	-	23 RS 72	-	-	-	-	-	
20	.325	.050	78	-	-	-	23 RM 3 78	-	23 RD 3 78	-	-	23 RM 78	-	23 RS 78	-	-	-	-	-	
CS-5720																				
16	3/8"	.050	60	-	-	-	33 RM 3 60	33 RS 3 60	33 RD 3 60	-	-	33 RM 60	33 RMF 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60	
18	3/8"	.050	68	-	-	-	33 RM 3 68	33 RS 3 68	33 RD 3 68	-	-	33 RM 68	33 RMF 68	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68	
20	3/8"	.050	72	-	-	-	33 RM 3 72	33 RS 3 72	33 RD 3 72	-	-	33 RM 72	33 RMF 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72	
24	3/8"	.050	84	-	-	-	33 RM 3 84	33 RS 3 84	33 RD 3 84	-	-	33 RM 84	33 RMF 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84	

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS													
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
100, 101, 102, 103, 104, 105, 106, 108, ES-161, ES-171, PS 34, PS 340, PS 341, PS 400, PS 401, PS 300 TH																	
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-
			47	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
			56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-
16	3/8" P	.050	58	63 PM3 58	63 PD3 58	-	63 PS3 58	-	63 PM 58	63 PS 58	-	-	-	-	-	-	-
			62	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
18	3/8" P	.050	62	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
			109, 110, 111, 115, PS 540														
11	.325	.058	52	-	-	25 RM3 52	-	25 RD3 52	-	-	25 RM 52	25 RS 52	-	-	-	-	-
			56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	23 RS 56	-	-	-	-	-
13	.325	.058	56	-	-	25 RM3 56	-	25 RD3 56	-	-	25 RM 56	25 RS 56	-	-	-	-	-
			64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	23 RS 64	-	-	-	-	-
15	.325	.058	64	-	-	25 RM3 64	-	25 RD3 64	-	-	25 RM 64	25 RS 64	-	-	-	-	-
			66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-
16	.325	.058	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	25 RS 66	-	-	-	-	-
			72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-
18	.325	.058	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	25 RS 72	-	-	-	-	-
			78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-
20	.325	.058	78	-	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	25 RS 78	-	-	-	-	-
			84	-	-	23 RM3 84	-	23 RD3 84	-	-	23 RM 84	23 RS 84	-	-	-	-	-
110, 111, 112, 113, 114, 115, 116, 116 SI, 117, 118, 119, PS 540, PS 6000 I																	
16	3/8"	.050	59	-	-	33 RM3 59	33 RS3 59	33 RD3 59	-	-	33 RM 59	33 RS 59	33 RSF 59	33 RSK 59	33 RSL 59	33 RSLH 59	33 RSLF 59
			60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	59	-	-	-	-	-	-	-	35 RM 59	35 RS 59	-	-	-	-	-
			60	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.058	64	-	-	-	-	-	-	35 RM 64	35 RS 64	-	-	-	-	-	
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
			72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
			84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
24	3/8"	.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
		.058	84	-	-	-	-	-	-	-	35 RM 84	35 RS 84	-	-	-	-	-
120, 120 SUPER, 120 SI, PS 6800 I																	
16	3/8"	.050	59	-	-	33 RM3 59	33 RS3 59	33 RD3 59	-	-	33 RM 59	33 RS 59	33 RSF 59	33 RSK 59	33 RSL 59	33 RSLH 59	33 RSLF 59
			60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	59	-	-	-	-	-	-	-	35 RM 59	35 RS 59	-	-	-	-	-
			60	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.058	64	-	-	-	-	-	-	35 RM 64	35 RS 64	-	-	-	-	-	
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
			72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
			81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
24	3/8"	.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
		.058	84	-	-	-	-	-	-	-	35 RM 84	35 RS 84	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS													
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	● STIHL PICCO™ Micro™ 3	● STIHL PICCO™ Duro 3	● STIHL RAPID™ Micro™ 3	● STIHL RAPID™ Super 3	● STIHL RAPID™ Duro 3	● STIHL PICCO™ Micro™	● STIHL PICCO™ Super	● STIHL RAPID™ Micro™	● STIHL RAPID™ Super	● STIHL RAPID™ Super F	● STIHL RAPID™ Super K	● STIHL RAPID™ Super L	● STIHL RAPID™ Super LH	● STIHL RAPID™ Super LF
122, 123, 133, 143, 144, 152, 153, 166, CA																	
17	3/8"	.058	64	-	-	-	-	-	-	-	35 RM 64	35 RS 64	-	-	-	-	-
		.063	64	-	-	36 RM3 64	36 RS3 64	36 RD3 64	-	-	36 RM 64	36 RS 64	-	-	36 RSL 64	36 RSLH 64	36 RSLF 64
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
26	3/8"	.058	89	-	-	-	-	-	-	-	35 RM 89	35 RS 89	-	-	-	-	-
28	3/8"	.058	92	-	-	-	-	-	-	-	35 RM 92	35 RS 92	-	-	-	-	-
32	3/8"	.063	110	-	-	36 RM3 110	36 RS3 110	36 RD3 110	-	-	36 RM 110	36 RS 110	-	-	36 RSL 110	36 RSLH 110	36 RSLF 110
36	3/8"	.063	119	-	-	36 RM3 119	36 RS3 119	36 RD3 119	-	-	36 RM 119	36 RS 119	-	-	36 RSL 119	36 RSLH 119	36 RSLF 119
PS 6400, PS 7300, PS 7900, PS 9000, PS 9010 FL																	
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	-	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.063	72	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	36 RS 72	-	-	36 RSL 72	36 RSLH 72	36 RSLF 72
22	3/8"	.050	76	-	-	33 RM3 76	33 RS3 76	33 RD3 76	-	-	33 RM 76	33 RS 76	33 RSF 76	33 RSK 76	33 RSL 76	33 RSLH 76	33 RSLF 76
		.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
24	3/8"	.058	84	-	-	-	-	-	-	-	35 RM 84	35 RS 84	-	-	-	-	-
		.063	84	-	-	36 RM3 84	36 RS3 84	36 RD3 84	-	-	36 RM 84	36 RS 84	-	-	36 RSL 84	36 RSLH 84	36 RSLF 84
28	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
		.058	92	-	-	-	-	-	-	-	35 RM 92	35 RS 92	-	-	-	-	-
30	3/8"	.063	93	-	-	36 RM3 93	36 RS3 93	36 RD3 93	-	-	36 RM 93	36 RS 93	-	-	36 RSL 93	36 RSLH 93	36 RSLF 93
		.050	98	-	-	33 RM3 98	33 RS3 98	33 RD3 98	-	-	33 RM 98	33 RS 98	33 RSF 98	33 RSK 98	33 RSL 98	33 RSLH 98	33 RSLF 98
32	3/8"	.063	98	-	-	36 RM3 98	36 RS3 98	36 RD3 98	-	-	36 RM 98	36 RS 98	-	-	36 RSL 98	36 RSLH 98	36 RSLF 98
		.050	105	-	-	33 RM3 105	33 RS3 105	33 RD3 105	-	-	33 RM 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RSLF 105
33	3/8"	.063	105	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	36 RS 105	-	-	36 RSL 105	36 RSLH 105	36 RSLF 105
		.058	110	-	-	-	-	-	-	-	35 RM 110	35 RS 110	-	-	-	-	-
34	3/8"	.063	110	-	-	36 RM3 110	36 RS3 110	36 RD3 110	-	-	36 RM 110	36 RS 110	-	-	36 RSL 110	36 RSLH 110	36 RSLF 110
36	3/8"	.063	115	-	-	36 RM3 115	36 RS3 115	36 RD3 115	-	-	36 RM 115	36 RS 115	-	-	36 RSL 115	36 RSLH 115	36 RSLF 115
37	3/8"	.058	119	-	-	-	-	-	-	-	35 RM 119	35 RS 119	-	-	-	-	-
PS 9000, PS 9010 FL																	
20	.404	.063	65	-	-	-	-	-	-	-	46 RM 65	46 RS 65	46 RSF 65	-	-	-	46 RSLF 65

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	● STIHL PICCO™ Micro™ 3	● STIHL PICCO™ Duro 3	● STIHL RAPID™ Micro™ 3	● STIHL RAPID™ Super 3	● STIHL RAPID™ Duro 3	● STIHL PICCO™ Micro™	● STIHL PICCO™ Super	● STIHL RAPID™ Micro™	● STIHL RAPID™ Super	● STIHL RAPID™ Super F	● STIHL RAPID™ Super K	● STIHL RAPID™ Super L	● STIHL RAPID™ Super LH	● STIHL RAPID™ Super LF		
CS-280, CS-290, CS-300, CS-300 EVL, CS-301, CS-302, CS-302 S, CS-305, CS-310, CS-315, CS-330, CS-330 T, CS-340, CS-341, CS-345, CS-346, CS-351, CS-360 T, CS-3000, CS-3400, CS-3450, ECS-2000, ECS-3000																			
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-		
			47	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-		
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-		
			56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-		
16	3/8" P	.050	57	63 PM3 57	63 PD3 57	-	63 PS3 57	-	63 PM 57	63 PS 57	-	-	-	-	-	-	-		
			58	63 PM3 58	63 PD3 58	-	63 PS3 58	-	63 PM 58	63 PS 58	-	-	-	-	-	-	-		
18	3/8" P	.050	62	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-		
CS-400, CS-440, CS-490 CS-510, CS-520, CS-3600, CS-3900, CS-4000, CS-4100, CS-4400, CS-4500, CS-4600, CS-5000																			
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	23 RS 56	-	-	-	-	-		
14	.325	.050	59	-	-	23 RM3 59	-	23 RD3 59	-	-	23 RM 59	23 RS 59	-	-	-	-	-		
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	23 RS 64	-	-	-	-	-		
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-		
17	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-		
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-		
CS-501, CS-5500																			
16	.325	.050	68	-	-	23 RM3 68	-	23 RD3 68	-	-	23 RM 68	23 RS 68	-	-	-	-	-		
20	.325	.050	79	-	-	23 RM3 79	-	23 RD3 79	-	-	23 RM 79	23 RS 79	-	-	-	-	-		
24	.325	.050	91	-	-	23 RM3 91	-	23 RD3 91	-	-	23 RM 91	23 RS 91	-	-	-	-	-		
CS-60, CS-60 S, CS-451, CS-452, CS-500, CS-501 EVL, CS-510 EVL, CS-550, CS-601, CS-602, CST-610																			
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60		
			64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64		
18	3/8"	.050	66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66		
			70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70		
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81		
27	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93		
CS-650, CS-660, CS-670, CS-701, CS-702, CS-750, CS-6700, CS-8000, CS-900, CS-1001																			
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60		
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64		
			66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66		
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70		
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81		
27	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93		
CS-900, CS-1001																			
21	3/8"	.063	79	-	-	36 RM3 79	36 RS3 79	36 RD3 79	-	-	36 RM 79	36 RS 79	-	-	36 RSL 79	36 RSLH 79	36 RSLF 79		
PPF-210, PPF-211, PPT-230, PPT-231, PPT-260, PPT-261																			
12	3/8" P	.050	44	63 PM3 44	63 PD3 44	-	63 PS3 44	-	63 PM 44	63 PS 44	-	-	-	-	-	-	-		

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
38568, 43177, 43178, HCS 513, HCS 516, HCS 520, HPS 513, LIMBLOPPER													
11	.325	.058	52	25 RM3 52	-	25 RD3 52	25 RM 52	25 RS 52	-	-	-	-	-
13	.325	.050	56	23 RM3 56	-	23 RD3 56	23 RM 56	23 RS 56	-	-	-	-	-
		.058	56	25 RM3 56	-	25 RD3 56	25 RM 56	25 RS 56	-	-	-	-	-
15	.325	.050	64	23 RM3 64	-	23 RD3 64	23 RM 64	23 RS 64	-	-	-	-	-
		.058	64	25 RM3 64	-	25 RD3 64	25 RM 64	25 RS 64	-	-	-	-	-
16	.325	.050	66	23 RM3 66	-	23 RD3 66	23 RM 66	23 RS 66	-	-	-	-	-
		.058	66	25 RM3 66	-	25 RD3 66	25 RM 66	25 RS 66	-	-	-	-	-
18	.325	.050	72	23 RM3 72	-	23 RD3 72	23 RM 72	23 RS 72	-	-	-	-	-
		.058	72	25 RM3 72	-	25 RD3 72	25 RM 72	25 RS 72	-	-	-	-	-
20	.325	.050	78	23 RM3 78	-	23 RD3 78	23 RM 78	23 RS 78	-	-	-	-	-
		.058	78	25 RM3 78	-	25 RD3 78	25 RM 78	25 RS 78	-	-	-	-	-
H 6200 B													
16	3/8"	.050	60	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
H 6220 B, H 6310 C 1, H 6311 C 1													
12	3/8"	.050	49	33 RM3 49	33 RS3 49	33 RD3 49	33 RM 49	33 RS 49	33 RSF 49	33 RSK 49	33 RSL 49	33 RSLH 49	33 RSLF 49
H 6220 B 1, H 6310 C, H 6311 C													
9	3/8"	.050	41	33 RM3 41	33 RS3 41	33 RD3 41	33 RM 41	33 RS 41	33 RSF 41	33 RSK 41	33 RSL 41	33 RSLH 41	33 RSLF 41
HCS 816, HCS 820, HCS 824													
16	3/8"	.050	60	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	33 RM3 68	33 RS3 68	33 RD3 68	33 RM 68	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
22	3/8"	.058	77	-	-	-	35 RM 77	35 RS 77	-	-	-	-	-
24	3/8"	.050	84	33 RM3 84	33 RS3 84	33 RD3 84	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
		.058	84	-	-	-	35 RM 84	35 RS 84	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS				
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Super 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
F-35, FB-35, MARK I								
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	63 PS3 45	63 PM 45	63 PS 45
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	63 PS3 52	63 PM 52	63 PS 52
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	63 PS3 56	63 PM 56	63 PS 56

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
180 SERIES, 190, 192, BANDIT, CLASSIC 192, ELECTRIC 200, 240, 40 SL, 245, LITTLE RED, LX-30, SUPER 2, SUPER 2 CC, VI SUPER 2, XEL-14, XEL ELECTRIC, XL, XL 2, XL-2 CC, XL-10, XL-14, XL-16																			
12	3/8" P	.050	47	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-	-	-
			48	63 PM3 48	63 PD3 48	-	63 PS3 48	-	63 PM 48	63 PS 48	-	-	-	-	-	-	-	-	-
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	-	-
			53	63 PM3 53	63 PD3 53	-	63 PS3 53	-	63 PM 53	63 PS 53	-	-	-	-	-	-	-	-	-
16	3/8" P	.050	59	63 PM3 59	63 PD3 59	-	63 PS3 59	-	63 PM 59	63 PS 59	-	-	-	-	-	-	-	-	-
			64	63 PM3 64	63 PD3 64	-	63 PS3 64	-	63 PM 64	63 PS 64	-	-	-	-	-	-	-	-	-
18	3/8" P	.050	62	70 PM3 62	70 PD3 62	-	70 PS3 62	-	70 PM 62	70 PS 62	-	-	-	-	-	-	-	-	-
20, 20 AV, 23 AV, 27, 3300, 3350, 3550, 3800, 3850, 4500, 4550, CS-40, D 3300, D 3350 B, I 3350 B, D 3850, D 3850 B, Z 3850, PS 33, RANGER, T 10901, UT 10901 A, UT 10926, UT 10947 A, UT 10974 A																			
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-	-	-
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	-	-
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-	-	-
18	3/8" P	.050	62	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-	-	-
25, 27, 4100, 4150, 4500, 4550, D 4550 B, I 3850 B, I 4150 B, I 4550 B, UPER 240, TIMBERMAN, UT 10896, UT 10910, UT 10927 A, UT 10942 A, T 10946 A																			
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	23 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	23 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	23 RS 78	-	-	-	-	-
25 SL, 240, 240 SL, 245																			
12	.325	.050	53	-	-	23 RM3 53	-	23 RD3 53	-	-	23 RM 53	-	-	23 RS 53	-	-	-	-	-
14	.325	.050	59	-	-	23 RM3 59	-	23 RD3 59	-	-	23 RM 59	-	-	23 RS 59	-	-	-	-	-
16	.325	.050	67	-	-	23 RM3 67	-	23 RD3 67	-	-	23 RM 67	-	-	23 RS 67	-	-	-	-	-
30, 130, 150, 150 AO, 250, 252, 290, 340, BIG RED, CS-50, EZ 250, MINI SL, SUPER EZ AO, XL-76, XL 100 SERIES																			
16	3/8"	.050	59	-	-	33 RM3 59	33 RS3 59	33 RD3 59	-	-	33 RM 59	-	-	33 RS 59	33 RSF 59	33 RSK 59	33 RSL 59	33 RSLH 59	33 RSLF 59
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
35 SL, 330, 350, 360, SUPER XL, SUPER XL-AO, XL-12, XL-15																			
16	3/8"	.050	59	-	-	33 RM3 59	33 RS3 59	33 RD3 59	-	-	33 RM 59	-	-	33 RS 59	33 RSF 59	33 RSK 59	33 RSL 59	33 RSLH 59	33 RSLF 59
			60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
			66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
27	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
400, 410, 450, 460, 540, 550, 650, 700, 750, 800, 825, 850, 900, 922, 923, SUPER XL 925, V-955, XL 400, XL 700 SERIES, XL 800 SERIES, XL 900 SERIES																			
16	3/8"	.050	59	-	-	33 RM3 59	33 RS3 59	33 RD3 59	-	-	33 RM 59	-	-	33 RS 59	33 RSF 59	33 RSK 59	33 RSL 59	33 RSLH 59	33 RSLF 59
			60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
			66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
21	3/8"	.063	79	-	-	36 RM3 79	36 RS3 79	36 RD3 79	-	-	36 RM 79	-	-	36 RS 79	-	-	-	-	-
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
27	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
32	3/8"	.063	105	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	-	-	36 RS 105	-	-	-	-	-
36	3/8"	.063	106	-	-	-	-	-	-	-	46 RM 106	46 RMH 106	46 RMK 106	46 RS 106	46 RSF 106	-	-	-	46 RSLF 106
		117	-	-	36 RM3 117	36 RS3 117	36 RD3 117	-	-	36 RM 117	-	-	36 RS 117	-	-	-	-	-	
C SERIES, SP 1000, SUPER 1050, WIZ, WIZ 66, XP 1000, XP 1020, XP 2000, XP 2100, ZIP																			
21	.404	.063	71	-	-	-	-	-	-	-	46 RM 71	46 RMH 71	46 RMK 71	46 RS 71	46 RSF 71	-	-	-	46 RSLF 71
CS-50																			
16	.325	.050	67	-	-	23 RM3 67	-	23 RD3 67	-	-	23 RM 67	-	-	23 RS 67	-	-	-	-	-
18	.325	.050	73	-	-	23 RM3 73	-	23 RD3 73	-	-	23 RM 73	-	-	23 RS 73	-	-	-	-	-
20	.325	.050	79	-	-	23 RM3 79	-	23 RD3 79	-	-	23 RM 79	-	-	23 RS 79	-	-	-	-	-
EL-12, EL-14, EL-16																			
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-	-	-
14	3/8" P	.050	50	63 PM3 50	63 PD3 50	-	63 PS3 50	-	63 PM 50	63 PS 50	-	-	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count																
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-	-	-
				STIHL PICCO™ Micro™ 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH	STIHL RAPID™ Super LF

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS																	
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF	
262, 262 XP, 362, 362 XP																					
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60	
		.058	60	-	-	-	-	-	-	-	35 RM 60	-	-	-	35 RS 60	-	-	-	-	-	
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	-	-	-	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68	
		.058	68	-	-	-	-	-	-	-	35 RM 68	-	-	-	35 RS 68	-	-	-	-	-	
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72	
		.058	72	-	-	-	-	-	-	-	35 RM 72	-	-	-	35 RS 72	-	-	-	-	-	
22	3/8"	.058	77	-	-	-	-	-	-	-	35 RM 77	-	-	-	35 RS 77	-	-	-	-	-	
		.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84	
24	3/8"	.058	84	-	-	-	-	-	-	-	35 RM 84	-	-	-	35 RS 84	-	-	-	-	-	
		.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93	
28	3/8"	.058	93	-	-	-	-	-	-	-	35 RM 93	-	-	-	35 RS 93	-	-	-	-	-	
325 P 4 (12"ONLY), 325 P 5 X, 326 P 4, 326 P 5 X, 334 T, 335, 335 XPT, 338 XPT, 1400, 1600																					
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-	-	-	-	
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	-	-	-	
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-	-	-	-	
33, 36, 38, 40, 41, 42, 44, 45, 49, 50, 51, 55, 57, 133, 136, 137, 140, 140 S, 141, 142, 154, 234, 238, 240, 242, 242 XP, 243, 246, 254, 254 XP, 257, 261, 340, 350, 346, 346 XP, 350, 351, 357 XP, 357 XPG, 359, 360, 444, 455 RANCHER																					
11	.325	.058	52	-	-	25 RM3 52	-	25 RD3 52	-	-	25 RM 52	-	-	-	25 RS 52	-	-	-	-	-	
13	.325	.058	56	-	-	25 RM3 56	-	25 RD3 56	-	-	25 RM 56	-	-	-	25 RS 56	-	-	-	-	-	
15	.325	.058	64	-	-	25 RM3 64	-	25 RD3 64	-	-	25 RM 64	-	-	-	25 RS 64	-	-	-	-	-	
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	-	23 RS 66	-	-	-	-	-	
		.058	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	-	-	-	25 RS 66	-	-	-	-	-	
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	-	23 RS 72	-	-	-	-	-	
		.058	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	-	-	-	25 RS 72	-	-	-	-	-	
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	-	23 RS 78	-	-	-	-	-	
		.058	78	-	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	-	-	-	25 RS 78	-	-	-	-	-	
34, 35, 37, 335, 338 XPT																					
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-	-	-	-	
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	-	-	-	
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-	-	-	-	
36, 40, 41, 42, 45, 49, 51, 55, 55 RANCHER, 136, 140, 141, 242, 246, 254, 257, 261, 262, 262 XP, 336, 339 XP, 340, 345, 346, 350, 351, 353, 357 XP, 359																					
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	-	-	-	23 RS 56	-	-	-	-	-	
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	-	-	-	23 RS 64	-	-	-	-	-	
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	-	23 RS 66	-	-	-	-	-	
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	-	23 RS 72	-	-	-	-	-	
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	-	23 RS 78	-	-	-	-	-	
36, 41, 136, 141, 243																					
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	-	-	-	23 RS 56	-	-	-	-	-	
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	-	-	-	23 RS 64	-	-	-	-	-	
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	-	23 RS 66	-	-	-	-	-	
		.058	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	-	-	-	25 RS 66	-	-	-	-	-	
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	-	23 RS 72	-	-	-	-	-	
		.058	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	-	-	-	25 RS 72	-	-	-	-	-	
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	-	23 RS 78	-	-	-	-	-	
55 RANCHER, 257, 261, 357 XP, 357 XPG, 359, 455																					
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60	
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	-	-	-	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68	
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72	
24	3/8"	.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84	
61, 160, 162, 260																					
13	3/8"	.058	52	-	-	-	-	-	-	-	35 RM 52	-	-	-	35 RS 52	-	-	-	-	-	
15	3/8"	.058	56	-	-	-	-	-	-	-	35 RM 56	-	-	-	35 RS 56	-	-	-	-	-	
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60	
		.058	60	-	-	-	-	-	-	-	35 RM 60	-	-	-	35 RS 60	-	-	-	-	-	
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	-	-	-	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68	
		.058	68	-	-	-	-	-	-	-	35 RM 68	-	-	-	35 RS 68	-	-	-	-	-	

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS																
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ F	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	STIHL RAPID™ Super LF
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	-	-	-	35 RS 72	-	-	-	-	-
		.063	72	-	-	-	-	-	-	-	36 RM 72	-	-	-	36 RS 72	-	-	-	-	-
22	3/8"	.050	76	-	-	33 RM3 76	33 RS3 76	33 RD3 76	-	-	33 RM 76	-	-	-	33 RS 76	33 RSF 76	33 RSK 76	33 RSL 76	33 RSLH 76	33 RSLF 76
		.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
24	3/8"	.058	84	-	-	-	-	-	-	-	35 RM 84	-	-	-	35 RS 84	-	-	-	-	-
		.058	84	-	-	-	-	-	-	-	35 RM 84	-	-	-	35 RS 84	-	-	-	-	-
		.063	84	-	-	-	-	-	-	-	36 RM 84	-	-	-	36 RS 84	-	-	-	-	-
28	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
		.058	92	-	-	-	-	-	-	-	35 RM 92	-	-	-	35 RS 92	-	-	-	-	-
L SERIES, 65, 66, 70, 77, 181, 185, 266, 268, 272, 281, 285, 288, 288 XP LITE, 298, 365, 371, 372, 372 XP, 372 XPG, 372 XPW, 380, 385, 385 XP, 385 XPG, 385 XPW, 394, 394 XP, 395, 395 XP, 395 XPG, 395 XPW, 480, 570, 575 XP, 1100, 2100, 2101, 3120, 3120 XP, JUNGLE 3120																				
13	3/8"	.050	52	-	-	-	-	-	-	-	35 RM 52	-	-	-	35 RS 52	-	-	-	-	-
15	3/8"	.050	56	-	-	-	-	-	-	-	35 RM 56	-	-	-	35 RS 56	-	-	-	-	-
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	35 RM 60	-	-	-	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	-	-	-	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	-	-	-	-	35 RM 68	-	-	-	35 RS 68	-	-	-	-	-
20	.404	.063	65	-	-	-	-	-	-	-	46 RM 65	46 RMF 65	46 RMH 65	46 RMK 65	46 RS 65	46 RSF 65	-	-	-	46 RSLF 65
		.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	-	-	-	35 RS 72	-	-	-	-	-
22	3/8"	.063	72	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	-	-	-	36 RS 72	-	-	36 RSL 72	36 RSLH 72	36 RSLF 72
		.050	76	-	-	33 RM3 76	33 RS3 76	33 RD3 76	-	-	33 RM 76	-	-	-	33 RS 76	33 RSF 76	33 RSK 76	33 RSL 76	33 RSLH 76	33 RSLF 76
		.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
24	3/8"	.058	84	-	-	-	-	-	-	-	35 RM 84	-	-	-	35 RS 84	-	-	-	-	-
		.063	84	-	-	36 RM3 84	36 RS3 84	36 RD3 84	-	-	36 RM 84	-	-	-	36 RS 84	-	-	36 RSL 84	36 RSLH 84	36 RSLF 84
		.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
28	3/8"	.058	93	-	-	-	-	-	-	-	35 RM 93	-	-	-	35 RS 93	-	-	-	-	-
		.063	93	-	-	36 RM3 93	36 RS3 93	36 RD3 93	-	-	36 RM 93	-	-	-	36 RS 93	-	-	36 RSL 93	36 RSLH 93	36 RSLF 93
		.404	.063	92	-	-	-	-	-	-	-	46 RM 92	46 RMF 92	46 RMH 92	46 RMK 92	46 RS 92	46 RSF 92	-	-	-
30	3/8"	.050	98	-	-	33 RM3 98	33 RS3 98	33 RD3 98	-	-	33 RM 98	-	-	-	33 RS 98	33 RSF 98	33 RSK 98	33 RSL 98	33 RSLH 98	33 RSLF 98
		.063	98	-	-	36 RM3 98	36 RS3 98	36 RD3 98	-	-	36 RM 98	-	-	-	36 RS 98	-	-	36 RSL 98	36 RSLH 98	36 RSLF 98
		.404	.063	95	-	-	-	-	-	-	-	46 RM 95	46 RMF 95	46 RMH 95	46 RMK 95	46 RS 95	46 RSF 95	-	-	-
32	3/8"	.050	105	-	-	33 RM3 105	33 RS3 105	33 RD3 105	-	-	33 RM 105	-	-	-	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RSLF 105
		.063	105	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	-	-	-	36 RS 105	-	-	36 RSL 105	36 RSLH 105	36 RSLF 105
33	3/8"	.058	110	-	-	-	-	-	-	-	35 RM 110	-	-	-	35 RS 110	-	-	-	-	-
34	3/8"	.063	110	-	-	36 RM3 110	36 RS3 110	36 RD3 110	-	-	36 RM 110	-	-	-	36 RS 110	-	-	36 RSL 110	36 RSLH 110	36 RSLF 110
36	.404	.063	104	-	-	-	-	-	-	-	46 RM 104	46 RMF 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	-	-	-	46 RSLF 104
		.063	115	-	-	36 RM3 115	36 RS3 115	36 RD3 115	-	-	36 RM 115	-	-	-	36 RS 115	-	-	36 RSL 115	36 RSLH 115	36 RSLF 115
37	3/8"	.058	119	-	-	-	-	-	-	-	35 RM 119	-	-	-	35 RS 119	-	-	-	-	-
		.063	119	-	-	36 RM3 119	36 RS3 119	36 RD3 119	-	-	36 RM 119	-	-	-	36 RS 119	-	-	36 RSL 119	36 RSLH 119	36 RSLF 119
42	3/8"	.063	135	-	-	36 RM3 135	36 RS3 135	36 RD3 135	-	-	36 RM 135	-	-	-	36 RS 135	-	-	36 RSL 135	36 RSLH 135	36 RSLF 135

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF	
25 EV, 28, 28 V, 30, 30 V, 35 EV, 40 V, 200 CS, 230 CS, CS 36, CS 40, CS 40 V																			
10	3/8" P	.043	40	61 PMM3 40	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
		.043	45	61 PMM3 45	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
		.050	47	-	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-	
		.050	48	-	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-	
12	3/8" P	.043	52	61 PMM3 52	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
		.050	52	-	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	
		.043	56	61 PMM3 56	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	58	-	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-	
16	3/8" P	.050	62	-	63 PM3 58	63 PD3 58	-	63 PS3 58	-	63 PM 58	63 PS 58	-	-	-	-	-	-	-	
		.050	64	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-	
		.050	64	-	63 PM3 64	63 PD3 64	-	63 PS3 64	-	63 PM 64	63 PS 64	-	-	-	-	-	-	-	
		.050	64	-	63 PM3 64	63 PD3 64	-	63 PS3 64	-	63 PM 64	63 PS 64	-	-	-	-	-	-	-	
45 EV, 46 EV, 300 CS, 450 V																			
14	.325	.050	59	-	-	-	23 RM3 59	-	23 RD3 59	-	-	23 RM 59	23 RS 59	-	-	-	-	-	
16	.325	.050	66	-	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-	
18	.325	.050	72	-	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-	
20	.325	.050	78	-	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-	
50 AV, 50 V, 51 SV, 55 SV, 55 V, 60 V																			
16	3/8"	.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60	
		.050	64	-	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64	
18	3/8"	.050	66	-	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66	
		.050	70	-	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70	
24	3/8"	.050	81	-	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81	
27	3/8"	.050	93	-	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93	
65, 65 SV, 66 SV, 70 V, 80 EV, 800 V																			
16	3/8"	.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60	
		.050	64	-	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64	
		.050	66	-	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66	
20	3/8"	.050	70	-	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70	
24	3/8"	.050	81	-	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81	
27	3/8"	.050	93	-	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93	
CS 46, CS 52																			
16	.325	.050	66	-	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-	
		.050	67	-	-	-	23 RM3 67	-	23 RD3 67	-	-	23 RM 67	23 RS 67	-	-	-	-	-	
18	.325	.050	72	-	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-	
CS 56, CS 62																			
16	.325	.050	66	-	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-	
		.050	67	-	-	-	23 RM3 67	-	23 RD3 67	-	-	23 RM 67	23 RS 67	-	-	-	-	-	
18	.325	.050	72	-	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-	
20	.325	.050	78	-	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-	
CS 62																			
16	3/8"	.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60	
18	3/8"	.050	64	-	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64	
		.050	70	-	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70	
20	3/8"	.050	72	-	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72	
		.050	80	-	-	-	33 RM3 80	33 RS3 80	33 RD3 80	-	-	33 RM 80	33 RS 80	33 RSF 80	33 RSK 80	33 RSL 80	33 RSLH 80	33 RSLF 80	
24	3/8"	.050	84	-	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84	

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS														
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH	STIHL RAPID™ Super LF
CS 71, CS 81																		
16	3/8"	.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
			64	-	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
18	3/8"	.050	66	-	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
			67	-	-	-	33 RM3 67	33 RS3 67	33 RD3 67	-	-	33 RM 67	33 RS 67	33 RSF 67	33 RSK 67	33 RSL 67	33 RSLH 67	33 RSLF 67
20	3/8"	.050	70	-	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
			72	-	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
21	3/8"	.063	72	-	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	36 RS 72	-	-	36 RSL 72	36 RSLH 72	36 RSLF 72
			81	-	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
24	3/8"	.050	83	-	-	-	33 RM3 83	33 RS3 83	33 RD3 83	-	-	33 RM 83	33 RS 83	33 RSF 83	33 RSK 83	33 RSL 83	33 RSLH 83	33 RSLF 83
			93	-	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
28	3/8"	.050	94	-	-	-	33 RM3 94	33 RS3 94	33 RD3 94	-	-	33 RM 94	33 RS 94	33 RSF 94	33 RSK 94	33 RSL 94	33 RSLH 94	33 RSLF 94
PS 2383, PS 2683, PSA 10																		
10	3/8" P	.043	40	61 PMM3 40	-	-	-	-	-	-	-	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
2014, 2016, 2035, 2036, 2036 TURBO, 2040, 2040 TURBO, 2041, 2045, 2050, 2050 TURBO, 2054, 2137, 2138, 2150, CS 2135, CS 2137, CS 2138																			
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-	-	-
			47	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-	-	-
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	-	-
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-	-	-
2036, 2036 TURBO, 2040, 2040 TURBO, 2041, 2045, 2050, 2050 TURBO																			
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	-	-	23 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	-	-	23 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	23 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	23 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	23 RS 78	-	-	-	-	-
2116 E																			
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-	-	-
36, 361, 365																			
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-	-	-
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	-	-
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-	-	-
45, 49, 50, 51, 52, 370, 410, 420, 425, 435, 450, 451, 455, 510, 521, 535, 2054, 2149, 2149 TURBO																			
11	.325	.058	52	-	-	25 RM3 52	-	25 RD3 52	-	-	25 RM 52	-	-	25 RS 52	-	-	-	-	-
13	.325	.058	56	-	-	25 RM3 56	-	25 RD3 56	-	-	25 RM 56	-	-	25 RS 56	-	-	-	-	-
15	.325	.058	64	-	-	25 RM3 64	-	25 RD3 64	-	-	25 RM 64	-	-	25 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	23 RS 66	-	-	-	-	-
		.058	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	-	-	25 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	23 RS 72	-	-	-	-	-
		.058	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	-	-	25 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	23 RS 78	-	-	-	-	-
45, 49, 50, 51, 52, 370, 410, 420, 425, 435, 450, 451, 455, 510, 521, 535, 2141, 2145, 2149, 2149 TURBO, 2150, 2152																			
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	-	-	23 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	-	-	23 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	23 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	23 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	23 RS 78	-	-	-	-	-
490, 520 SP, 525, 535, 590, 2050, 2051, 2055, 2063, CS 2159, CS 2159 C, CS 2159 CWG, CS 2159 WH																			
16	3/8"	.050	59	-	-	33 RM3 59	33 RS3 59	33 RD3 59	-	-	33 RM 59	-	-	33 RS 59	33 RSF 59	33 RSK 59	33 RSL 59	33 RSLH 59	33 RSLF 59
			60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	59	-	-	-	-	-	-	-	35 RM 59	-	-	35 RS 59	-	-	-	-	-
			60	-	-	-	-	-	-	-	35 RM 60	-	-	35 RS 60	-	-	-	-	-
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
			64	-	-	-	-	-	-	-	35 RM 64	-	-	35 RS 64	-	-	-	-	-
		.058	64	-	-	-	-	-	-	-	35 RM 68	-	-	35 RS 68	-	-	-	-	-
			68	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
			72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	-	-	35 RS 72	-	-	-	-	-
			72	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
23	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
24	3/8"	.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
		.058	84	-	-	-	-	-	-	-	35 RM 84	-	-	35 RS 84	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
60, 61, 62, 621, 2350																			
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	35 RM 60	-	-	35 RS 60	-	-	-	-	-
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.058	68	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
		.058	72	-	-	-	-	-	-	-	35 RM 72	-	-	35 RS 72	-	-	-	-	-
21	3/8"	.063	79	-	-	36 RM3 79	36 RS3 79	36 RD3 79	-	-	36 RM 79	-	-	36 RS 79	-	-	36 RSL 79	36 RSLH 79	36 RSLF 79
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
27	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
625, 630, 630 SUPER, 630 WEST COAST, 2065, 2071, 2077, 2163, 2165, 2171, CS 2163, CS 2163 WH, CS 2165, CS 2171, CS 2171 WH, CS 2186 WH																			
13	3/8"	.058	52	-	-	-	-	-	-	-	35 RM 52	-	-	35 RS 52	-	-	-	-	-
15	3/8"	.058	56	-	-	-	-	-	-	-	35 RM 56	-	-	35 RS 56	-	-	-	-	-
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	35 RM 60	-	-	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	-	-	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	-	-	-	-	35 RM 68	-	-	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	-	-	35 RS 72	-	-	-	-	-
22	3/8"	.050	76	-	-	33 RM3 76	33 RS3 76	33 RD3 76	-	-	33 RM 76	-	-	33 RS 76	33 RSF 76	33 RSK 76	33 RSL 76	33 RSLH 76	33 RSLF 76
24	3/8"	.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
		.058	84	-	-	-	-	-	-	-	35 RM 84	-	-	35 RS 84	-	-	-	-	-
28	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
		.058	93	-	-	-	-	-	-	-	35 RM 93	-	-	35 RS 93	-	-	-	-	-
66, 70, 75, 77, 80, 81, 90, 110, 111, 490, 601, 751, 801, 820, 830, 910, 920, 930, 939, 1020																			
36	.404	.063	106	-	-	-	-	-	-	-	46 RM 106	46 RMH 106	46 RMK 106	46 RS 106	46 RSF 106	-	-	-	46 RSLF 106
66, 70, 75, 77, 80, 81, 90, 110, 111, 601, 751, 801, 820, 830, 910, 920, 930, 939, 941, 1020																			
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	35 RM 60	-	-	35 RS 60	-	-	-	-	-
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.058	68	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
		.058	72	-	-	-	-	-	-	-	35 RM 72	-	-	35 RS 72	-	-	-	-	-
21	3/8"	.063	79	-	-	36 RM3 79	36 RS3 79	36 RD3 79	-	-	36 RM 79	-	-	36 RS 79	-	-	-	-	-
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
27	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
32	3/8"	.063	105	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	-	-	36 RS 105	-	-	-	-	-
36	3/8"	.063	117	-	-	36 RM3 117	36 RS3 117	36 RD3 117	-	-	36 RM 117	-	-	36 RS 117	-	-	-	-	-
670, 670 WEST COAST, 2065, 2071, 2077, 2083, 2083 II, 2094, 2095																			
13	3/8"	.050	52	-	-	-	-	-	-	-	35 RM 52	-	-	35 RS 52	-	-	-	-	-
15	3/8"	.050	56	-	-	-	-	-	-	-	35 RM 56	-	-	35 RS 56	-	-	-	-	-
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	35 RM 60	-	-	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	-	-	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	-	-	-	-	35 RM 68	-	-	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.063	72	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	-	-	36 RS 72	-	-	-	-	-
22	3/8"	.050	76	-	-	33 RM3 76	33 RS3 76	33 RD3 76	-	-	33 RM 76	-	-	33 RS 76	33 RSF 76	33 RSK 76	33 RSL 76	33 RSLH 76	33 RSLF 76
		.058	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
24	3/8"	.058	84	-	-	-	-	-	-	-	35 RM 84	-	-	35 RS 84	-	-	-	-	-
		.063	84	-	-	36 RM3 84	36 RS3 84	36 RD3 84	-	-	36 RM 84	-	-	36 RS 84	-	-	-	-	-
28	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
		.063	93	-	-	36 RM3 93	36 RS3 93	36 RD3 93	-	-	36 RM 93	-	-	36 RS 93	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH	STIHL RAPID™ Super LF
30	3/8"	.050	98	-	-	33 RM3 98	33 RS3 98	33 RD3 98	-	-	33 RM 98	-	-	33 RS 98	33 RSF 98	33 RSK 98	33 RSL 98	33 RSLH 98	33 RSLF 98
		.063	98	-	-	36 RM3 98	36 RS3 98	36 RD3 98	-	-	36 RM 98	-	-	36 RS 98	-	-	-	-	-
32	3/8"	.050	105	-	-	33 RM3 105	33 RS3 105	33 RD3 105	-	-	33 RM 105	-	-	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RSLF 105
		.063	105	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	-	-	36 RS 105	-	-	-	-	-
33	3/8"	.058	110	-	-	-	-	-	-	-	35 RM 110	-	-	35 RS 110	-	-	-	-	-
34	3/8"	.063	110	-	-	36 RM3 110	36 RS3 110	36 RD3 110	-	-	36 RM 110	-	-	36 RS 110	-	-	-	-	-
		.063	115	-	-	36 RM3 115	36 RS3 115	36 RD3 115	-	-	36 RM 115	-	-	36 RS 115	-	-	-	-	-
37	3/8"	.058	119	-	-	-	-	-	-	-	35 RM 119	-	-	35 RS 119	-	-	-	-	-
		.063	119	-	-	36 RM3 119	36 RS3 119	36 RD3 119	-	-	36 RM 119	-	-	36 RS 119	-	-	-	-	-
42	3/8"	.063	135	-	-	36 RM3 135	36 RS3 135	36 RD3 135	-	-	36 RM 135	-	-	36 RS 135	-	-	-	-	-
CS 62																			
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	-	-	23 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	-	-	23 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	23 RS 66	-	-	-	-	-
		.058	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	-	-	25 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	23 RS 72	-	-	-	-	-
		.058	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	-	-	25 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	23 RS 78	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS													
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
DCS 34, DCS 330 S, DCS 330 TH, DCS 340, DCS 341, DCS 390, DCS 390 S, DCS 400, DCS 401, 5012 B, 5014 NB, 5016 NB, UC 3500, UC 4000																	
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-
			47	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
			56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-
16	3/8" P	.050	58	63 PM3 58	63 PD3 58	-	63 PS3 58	-	63 PM 58	63 PS 58	-	-	-	-	-	-	-
			62	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
DCS 430, DCS 431, DCS 520 I, DCS 540, DCS 5200 I																	
11	.325	.058	52	-	-	25 RM3 52	-	25 RD3 52	-	-	25 RM 52	25 RS 52	-	-	-	-	-
			45	-	-	23 RM3 45	-	23 RD3 45	-	-	23 RM 45	23 RS 45	-	-	-	-	-
13	.325	.058	56	-	-	25 RM3 56	-	25 RD3 56	-	-	25 RM 56	25 RS 56	-	-	-	-	-
			47	-	-	23 RM3 47	-	23 RD3 47	-	-	23 RM 47	23 RS 47	-	-	-	-	-
15	.325	.058	64	-	-	25 RM3 64	-	25 RD3 64	-	-	25 RM 64	25 RS 64	-	-	-	-	-
			66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-
16	.325	.058	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	25 RS 66	-	-	-	-	-
			72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-
18	.325	.058	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	25 RS 72	-	-	-	-	-
			78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-
20	.325	.058	78	-	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	25 RS 78	-	-	-	-	-
			78	-	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	25 RS 78	-	-	-	-	-
DCS 520 I, DCS 540, DCS 5200 I, DCS 6000 I																	
16	3/8"	.050	59	-	-	33 RM3 59	33 RS3 59	33 RD3 59	-	-	33 RM 59	33 RS 59	33 RSF 59	33 RSK 59	33 RSL 59	33 RSLH 59	33 RSLF 59
			60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	59	-	-	-	-	-	-	-	35 RM 59	35 RS 59	-	-	-	-	-
			60	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.058	64	-	-	-	-	-	-	35 RM 64	35 RS 64	-	-	-	-	-	
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
			72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
23	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
DCS 6401, DCS 7301, DCS 7901, DCS 9000, DCS 9010 FL																	
13	3/8"	3/8"	52	-	-	-	-	-	-	-	35 RM 52	35 RS 52	-	-	-	-	-
15	3/8"	3/8"	56	-	-	-	-	-	-	-	35 RM 56	35 RS 56	-	-	-	-	-
16	3/8"	.050	59	-	-	33 RM3 59	33 RS3 59	33 RD3 59	-	-	33 RM 59	33 RS 59	33 RSF 59	33 RSK 59	33 RSL 59	33 RSLH 59	33 RSLF 59
		.058	60	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	-	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
		.063	72	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	36 RS 72	-	-	-	-	-
24	3/8"	.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
		.058	84	-	-	-	-	-	-	-	35 RM 84	35 RS 84	-	-	-	-	-
		.063	84	-	-	36 RM3 84	36 RS3 84	36 RD3 84	-	-	36 RM 84	36 RS 84	-	-	-	-	-
28	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
		.058	93	-	-	-	-	-	-	-	35 RM 93	35 RS 93	-	-	-	-	-
		.063	93	-	-	36 RM3 93	36 RS3 93	36 RD3 93	-	-	36 RM 93	36 RS 93	-	-	-	-	-
30	3/8"	.050	98	-	-	33 RM3 98	33 RS3 98	33 RD3 98	-	-	33 RM 98	33 RS 98	33 RSF 98	33 RSK 98	33 RSL 98	33 RSLH 98	33 RSLF 98
		.063	98	-	-	36 RM3 98	36 RS3 98	36 RD3 98	-	-	36 RM 98	36 RS 98	-	-	-	-	-
32	3/8"	.050	105	-	-	33 RM3 105	33 RS3 105	33 RD3 105	-	-	33 RM 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RSLF 105
		.063	105	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	36 RS 105	-	-	-	-	-
33	3/8"	.058	110	-	-	-	-	-	-	-	35 RM 110	35 RS 110	-	-	-	-	-
34	3/8"	.063	110	-	-	36 RM3 110	36 RS3 110	36 RD3 110	-	-	36 RM 110	36 RS 110	-	-	-	-	-
36	3/8"	.063	115	-	-	36 RM3 115	36 RS3 115	36 RD3 115	-	-	36 RM 115	36 RS 115	-	-	-	-	-
37	3/8"	.058	119	-	-	-	-	-	-	-	35 RM 119	35 RS 119	-	-	-	-	-
		.063	119	-	-	36 RM3 119	36 RS3 119	36 RD3 119	-	-	36 RM 119	36 RS 119	-	-	-	-	-
42	3/8"	.063	135	-	-	36 RM3 135	36 RS3 135	36 RD3 135	-	-	36 RM 135	36 RS 135	-	-	-	-	-
DCS 6800 I																	

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS													
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count		● STIHL PICCO™ Micro™ 3	● STIHL PICCO™ Duro 3	● STIHL RAPID™ Micro™ 3	● STIHL RAPID™ Super 3	● STIHL RAPID™ Duro 3	● STIHL PICCO™ Micro™	● STIHL PICCO™ Super	● STIHL RAPID™ Micro™	● STIHL RAPID™ Super	● STIHL RAPID™ Super F	● STIHL RAPID™ Super K	● STIHL RAPID™ Super L	● STIHL RAPID™ Super LH	● STIHL RAPID™ Super LF
16	3/8"	.050	59	-	-	-	33 RM3 59	33 RS3 59	33 RD3 59	-	-	33 RM 59	33 RS 59	33 RSF 59	33 RSK 59	33 RSL 59	33 RSLH 59	33 RSLF 59
		.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	59	-	-	-	-	-	-	-	-	35 RM 59	35 RS 59	-	-	-	-	-
		.058	60	-	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	64	-	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.058	64	-	-	-	-	-	-	-	-	35 RM 64	35 RS 64	-	-	-	-	-
20	3/8"	.050	70	-	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
		.050	72	-	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
23	3/8"	.050	81	-	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
DCS 9000, DCS 9010 FL																		
20	.404	.063	65	-	-	-	-	-	-	-	-	46 RM 65	46 RS 65	46 RSF 65	-	-	-	46 RSLF 65

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS									
Guide bar length (inch)*	Teilung (Zoll)	Treibglieddicke / Nutbreite (Zoll)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Super 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super
MC-PL10, MC-S10													
10	3/4" P	.050	40	63 PM3 40	-	63 PD3 40	-	63 PS3 40	-	63 PM 40	63 PS 40	-	-
11	.325	.058	52	-	-	-	25 RM3 52	-	25 RD3 52	-	-	25 RM 52	25 RS 52

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS													
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH	STIHL RAPID™ Super LF
10 E, 12 E, 14 E, 16 E, MS 1425, MS 1630, MS 1640																	
10	3/8" P	.050	39	63 PM3 39	63 PD3 39	-	63 PS3 39	-	63 PM 39	63 PS 39	-	-	-	-	-	-	-
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-
14	3/8" P	.050	50	63 PM3 50	63 PD3 50	-	63 PS3 50	-	63 PM 50	63 PS 50	-	-	-	-	-	-	-
16	3/8" P	.050	55	63 PM3 55	63 PD3 55	-	63 PS3 55	-	63 PM 55	63 PS 55	-	-	-	-	-	-	-
18	3/8" P	.050	60	63 PM3 60	63 PD3 60	-	63 PS3 60	-	63 PM 60	63 PS 60	-	-	-	-	-	-	-
1-10, 2-10, 3-10, 4-10, 5-10, 6-10, 10-10, 10-10 A, 55, PRO MAC 55, 60, 555, 570, 605, CP-55, DOUBLE EAGLE 50, EAGER BEAVER 3.7, PM 605, PRO MAC 5700, SILVER EAGLE 3420, SILVER EAGLE 3720, SP-60, TIMBER BEAR, TIMBER BEAR 20, TITAN 50, TITAN 57																	
16	3/8" P	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8" P	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.050	66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8" P	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
24	3/8" P	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
28	3/8" P	.050	92	-	-	33 RM3 92	33 RS3 92	33 RD3 92	-	-	33 RM 92	33 RS 92	33 RSF 92	33 RSK 92	33 RSL 92	33 RSLH 92	33 RSLF 92
14 A/S, EM 16																	
14	3/8" P	.050	49	63 PM3 49	63 PD3 49	-	63 PS3 49	-	63 PM 49	63 PS 49	-	-	-	-	-	-	-
16	3/8" P	.050	54	63 PM3 54	63 PD3 54	-	63 PS3 54	-	63 PM 54	63 PS 54	-	-	-	-	-	-	-
18	3/8" P	.050	60	63 PM3 60	63 PD3 60	-	63 PS3 60	-	63 PM 60	63 PS 60	-	-	-	-	-	-	-
1849 AV, 2046 AV, 2049 AV, 4600, 4700, 4900, 5000, 5500, MS 1846 AV, MS 1849 AV, MS 1850, MS 2046 AV, MS 2046 AVCC, MS 2049, MS 2049 AV, MS 2049 AVCC, MS 2050, PM 1845 AV; PRO MAC: 40, 46; SILVER EAGLE: 2818, 3020																	
16	.325	.050	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	25 RS 66	-	-	-	-	-
		.058	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	25 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	25 RS 72	-	-	-	-	-
		.058	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	25 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	25 RS 78	-	-	-	-	-
		.058	78	-	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	25 RS 78	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	STIHL PICCO™ Micro™ 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Micro™ H	STIHL RAPID™ Micro™ K	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH	STIHL RAPID™ Super LF
999																		
21	.404	.063	68	-	-	-	-	-	-	46 RM 68	46 RMH 68	46 RMK 68	46 RS 68	46 RSF 68	-	-	-	46 RSLF 68
25	.404	.063	80	-	-	-	-	-	-	46 RM 80	46 RMH 80	46 RMK 80	46 RS 80	46 RSF 80	-	-	-	46 RSLF 80
240, 241, 244, 935, OLE 140 F, OLE 300																		
14	3/8" P	.050	50	63 PM3 50	-	63 PS3 50	-	63 PM 50	63 PS 50	-	-	-	-	-	-	-	-	-
16	3/8" P	.050	55	63 PM3 55	-	63 PS3 55	-	63 PM 55	63 PS 55	-	-	-	-	-	-	-	-	-
250, 250 A, 251, 252, 254, 260, 261, 264, 355, 460 A SUPER																		
16	3/8"	.050	60	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	35 RM 60	-	-	35 RS 60	-	-	-	-	-
18	3/8"	.050	64	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.050	66	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
		.058	68	-	-	-	-	-	-	35 RM 68	-	-	35 RS 68	-	-	-	-	-
20	3/8"	.050	70	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
		.050	72	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	35 RM 72	-	-	35 RS 72	-	-	-	-	-
21	3/8"	.063	79	-	36 RM3 79	36 RS3 79	36 RD3 79	-	-	36 RM 79	-	-	36 RS 79	-	-	-	-	-
23	3/8"	.050	81	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
28	3/8"	.050	93	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
481, 970, 980, SUPER 482																		
16	3/8"	.050	60	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	35 RM 60	-	-	35 RS 60	-	-	-	-	-
18	3/8"	.050	64	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.050	66	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
		.058	68	-	-	-	-	-	-	35 RM 68	-	-	35 RS 68	-	-	-	-	-
20	3/8"	.050	70	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
		.050	72	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	35 RM 72	-	-	35 RS 72	-	-	-	-	-
21	3/8"	.063	72	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	-	-	36 RS 72	-	-	-	-	-
23	3/8"	.050	81	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
28	3/8"	.050	93	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
938, 940 C, 941, 945, 950, 951, 956, 962																		
16	.325	.058	66	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	-	-	25 RS 66	-	-	-	-	-
18	.325	.058	72	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	-	-	25 RS 72	-	-	-	-	-
20	.325	.050	78	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	23 RS 78	-	-	-	-	-
		.058	78	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	-	-	25 RS 78	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS													
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
365																	
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
330, 350, 1601, 1602, 1610, 1611, 1612, 1613, 1614, 1616, MINI-P SERIES, SPARTAN																	
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-
410, 510, 540																	
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	23 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	23 RS 64	-	-	-	-	-
550, 1655, 2055, P-55, R-11, R-12, R-14, R-16, R-17, R-18, R-19, S-50, S-55, S-65																	
13	3/8"	.058	52	-	-	-	-	-	-	-	35 RM 52	35 RS 52	-	-	-	-	-
15	3/8"	.058	56	-	-	-	-	-	-	-	35 RM 56	35 RS 56	-	-	-	-	-
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	-	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
		.063	72	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	36 RS 72	-	-	-	-	-
650, 7000, P-65, P-70, P-85, P-100, R-20, R-21, R-22, R-23, R-30, R-35, R-40, R-416, R-420, R-421, R-435, R-440																	
13	3/8"	.058	52	-	-	-	-	-	-	-	35 RM 52	35 RS 52	-	-	-	-	-
15	3/8"	.058	56	-	-	-	-	-	-	-	35 RM 56	35 RS 56	-	-	-	-	-
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	-	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
		.063	72	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	36 RS 72	-	-	-	-	-
P-360, P-400, P-450, P-500, P-5000																	
11	.325	.058	52	-	-	25 RM3 52	-	25 RD3 52	-	-	25 RM 52	25 RS 52	-	-	-	-	-
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	23 RS 56	-	-	-	-	-
		.058	56	-	-	25 RM3 56	-	25 RD3 56	-	-	25 RM 56	25 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	23 RS 64	-	-	-	-	-
		.058	64	-	-	25 RM3 64	-	25 RD3 64	-	-	25 RM 64	25 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-
		.058	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	25 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-
		.058	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	25 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-
		.058	78	-	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	25 RS 78	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS									
Guide bar length (inch)*	Pitch	Drive link gauge / groove width (inch)	Drive link count	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
1074, P-21, P-26, P-28													
11	.325	.058	52	25 RM3 52	-	25 RD3 52	25 RM 52	25 RS 52	-	-	-	-	-
13	.325	.050	56	23 RM3 56	-	23 RD3 56	23 RM 56	23 RS 56	-	-	-	-	-
		.058	56	25 RM3 56	-	25 RD3 56	25 RM 56	25 RS 56	-	-	-	-	-
15	.325	.050	64	23 RM3 64	-	23 RD3 64	23 RM 64	23 RS 64	-	-	-	-	-
		.058	64	25 RM3 64	-	25 RD3 64	25 RM 64	25 RS 64	-	-	-	-	-
16	.325	.050	66	23 RM3 66	-	23 RD3 66	23 RM 66	23 RS 66	-	-	-	-	-
		.058	66	25 RM3 66	-	25 RD3 66	25 RM 66	25 RS 66	-	-	-	-	-
18	.325	.050	72	23 RM3 72	-	23 RD3 72	23 RM 72	23 RS 72	-	-	-	-	-
		.058	72	25 RM3 72	-	25 RD3 72	25 RM 72	25 RS 72	-	-	-	-	-
20	.325	.050	78	23 RM3 78	-	23 RD3 78	23 RM 78	23 RS 78	-	-	-	-	-
		.058	78	25 RM3 78	-	25 RD3 78	25 RM 78	25 RS 78	-	-	-	-	-
515, 970, 1072, 1073, FARMLITE, P-11, P-20, P-25													
16	3/8"	.050	60	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.058	68	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-
		.050	72	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
20	3/8"	.058	72	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
		.063	72	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	36 RS 72	-	-	-	-	-
FARMSAW, FARMSAW II, P-38, P-39, P-41, P-42, P-45, P-50, P-51, P-52, P-60, P-61, P-62, P-285													
16	3/8"	.050	60	33 RM3 60	33 RS3 60	33 RD3 60	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.058	68	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	33 RM3 72	33 RS3 72	33 RD3 72	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
		.063	72	36 RM3 72	36 RS3 72	36 RD3 72	36 RM 72	36 RS 72	-	-	-	-	-
32	3/8"	.063	110	36 RM3 110	36 RS3 110	36 RD3 110	36 RM 110	36 RS 110	-	-	-	-	-
36	3/8"	.063	119	36 RM3 119	36 RS3 119	36 RD3 119	36 RM 119	36 RS 119	-	-	-	-	-
P-10, P-12													
12	3/8" P	.050	45	-	63 PS3 45	-	-	-	-	-	-	-	-
14	3/8" P	.050	52	-	63 PS3 52	-	-	-	-	-	-	-	-
16	3/8" P	.050	56	-	63 PS3 56	-	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Micro™ H	 STIHL RAPID™ Micro™ K	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LE
325																			
11	.325	.058	52	-	-	25 RM3 52	-	25 RD3 52	-	-	25 RM 52	-	-	25 RS 52	-	-	-	-	-
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	-	-	23 RS 56	-	-	-	-	-
		.058	56	-	-	25 RM3 56	-	25 RD3 56	-	-	25 RM 56	-	-	25 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	-	-	23 RS 64	-	-	-	-	-
		.058	64	-	-	25 RM3 64	-	25 RD3 64	-	-	25 RM 64	-	-	25 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	23 RS 66	-	-	-	-	-
		.058	66	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	-	-	25 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	23 RS 72	-	-	-	-	-
		.058	72	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	-	-	25 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	23 RS 78	-	-	-	-	-
		.058	78	-	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	-	-	25 RS 78	-	-	-	-	-
203, 245, 306, 306 A, 360, 361, 375, 400, 445, 450, 3400, 3700, 3800																			
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66	
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
28	3/8"	.050	92	-	-	33 RM3 92	33 RS3 92	33 RD3 92	-	-	33 RM 92	-	-	33 RS 92	33 RSF 92	33 RSK 92	33 RSL 92	33 RSLH 92	33 RSLF 92
255, 285, 295, 305, 306 SA, 310, 315, 335 PREDATOR, 336, 2700, 2750, 2775, 2800, 2900, 3000, 3050, 3100, 3300																			
13	.325	.050	56	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	-	-	23 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	-	-	23 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	-	-	23 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	-	-	23 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	-	-	23 RS 78	-	-	-	-	-
25 A, 180, 190, 200, 205, 210, 220, 221, 225, 230, 235, 236, 240, 255, 260, 1220, 1800, 1900, 1900 LE, 1950, 1950 LE, 1975 LE, 2000, 2050, 2055, 2055 LE, 2075, 2075 C, 2150, 2155, 2175, 2250, 2250 LE, 2300, 2350, 2375, 2375 LE, 2450, 2550, 3314, 3416, 3516, 3816, 3816 AV, 3818, 4018, 4218, 4218 AV, E 14 E, E 16 E, ES 350, MICRO 25 (XX SERIES AND XXV SERIES), S 23, S 25, S 25 AV, S 25 CVA, S 25 D, S 25 DA, S 35 (AFTER CONVERSION TO 3/8" PITCH); ELECTRIC MODELS: 1420, 1425, 1625, 2100, 2400, 2500, 2600, ELECTRIC PRO 400 E, PATRIOT 1900, WILDTHING, WOODSHARK																			
10	3/8" P	.050	40	63 PM3 40	63 PD3 40	-	63 PS3 40	-	63 PM 40	63 PS 40	-	-	-	-	-	-	-	-	-
12	3/8" P	.050	45	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-	-	-
		47	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-	-	-	-
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	-	-
16	3/8" P	.050	56	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-	-	-
		58	63 PM3 58	63 PD3 58	-	63 PS3 58	-	63 PM 58	63 PS 58	-	-	-	-	-	-	-	-	-	-
18	3/8" P	.050	62	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-	-	-
330, 365, 380, 3350, 3450, 3500, 3600, 3650, 3750																			
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
22	3/8"	.050	76	-	-	33 RM3 76	33 RS3 76	33 RD3 76	-	-	33 RM 76	-	-	33 RS 76	33 RSF 76	33 RSK 76	33 RSL 76	33 RSLH 76	33 RSLF 76
24	3/8"	.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
395, 3900, 4000, 4200, 4400, 4900, 5200, 5400, 5500, 6700																			
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66	
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
27	3/8"	.050	92	-	-	33 RM3 92	33 RS3 92	33 RD3 92	-	-	33 RM 92	-	-	33 RS 92	33 RSF 92	33 RSK 92	33 RSL 92	33 RSLH 92	33 RSLF 92
28	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
32	3/8"	.050	105	-	-	33 RM3 105	33 RS3 105	33 RD3 105	-	-	33 RM 105	-	-	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RSLF 105
405, 455, 525, 655																			
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	70	-	-	-	-	-	-	-	35 RM 70	-	-	35 RS 70	-	-	-	-	-
24	3/8"	.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count	STHL PICCO™ Micro™ 3	STHL PICCO™ Duro 3	STHL RAPID™ Micro™ 3	STHL RAPID™ Super 3	STHL RAPID™ Duro 3	STHL PICCO™ Micro™	STHL PICCO™ Super	STHL RAPID™ Micro™	STHL RAPID™ Micro™ H	STHL RAPID™ Micro™ K	STHL RAPID™ Super	STHL RAPID™ Super F	STHL RAPID™ Super K	STHL RAPID™ Super L	STHL RAPID™ Super LH	STHL RAPID™ Super LF
32	3/8"	.063	110	-	-	36 RM3 110	36 RS3 110	36 RD3 110	-	-	36 RM 110	-	-	36 RS 110	-	-	-	-	-
36	3/8"	.063	119	-	-	36 RM3 119	36 RS3 119	36 RD3 119	-	-	36 RM 119	-	-	36 RS 119	-	-	-	-	-
414, 425, 475, 505																			
32	.404	.063	95	-	-	-	-	-	-	-	46 RM 95	46 RMH 95	46 RMK 95	46 RS 95	46 RSF 95	-	-	-	46 RSLF 95
36	.404	.063	104	-	-	-	-	-	-	-	46 RM 104	46 RMH 104	46 RMK 104	46 RS 104	46 RSF 104	-	-	-	46 RSLF 104
415, 425, 445, 475, 505																			
13	3/8"	.058	52	-	-	-	-	-	-	-	35 RM 52	-	-	35 RS 52	-	-	-	-	-
15	3/8"	.058	56	-	-	-	-	-	-	-	35 RM 56	-	-	35 RS 56	-	-	-	-	-
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	35 RM 60	-	-	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	-	-	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	-	-	-	-	35 RM 68	-	-	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	-	-	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	35 RM 72	-	-	35 RS 72	-	-	-	-	-
		.063	72	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	-	-	36 RS 72	-	-	-	-	-
22	3/8"	.050	76	-	-	33 RM3 76	33 RS3 76	33 RD3 76	-	-	33 RM 76	-	-	33 RS 76	33 RSF 76	33 RSK 76	33 RSL 76	33 RSLH 76	33 RSLF 76
24	3/8"	.050	84	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	-	-	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
		.058	84	-	-	-	-	-	-	-	35 RM 84	-	-	35 RS 84	-	-	-	-	-
		.063	84	-	-	36 RM3 84	36 RS3 84	36 RD3 84	-	-	36 RM 84	-	-	36 RS 84	-	-	-	-	-
28	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
		.058	92	-	-	-	-	-	-	-	35 RM 92	-	-	35 RS 92	-	-	-	-	-
		.063	93	-	-	36 RM3 93	36 RS3 93	36 RD3 93	-	-	36 RM 93	-	-	36 RS 93	-	-	-	-	-
30	3/8"	.050	98	-	-	33 RM3 98	33 RS3 98	33 RD3 98	-	-	33 RM 98	-	-	33 RS 98	33 RSF 98	33 RSK 98	33 RSL 98	33 RSLH 98	33 RSLF 98
		.063	98	-	-	36 RM3 98	36 RS3 98	36 RD3 98	-	-	36 RM 98	-	-	36 RS 98	-	-	-	-	-
32	3/8"	.050	105	-	-	33 RM3 105	33 RS3 105	33 RD3 105	-	-	33 RM 105	-	-	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RSLF 105
		.063	105	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	-	-	36 RS 105	-	-	-	-	-
33	3/8"	.058	110	-	-	-	-	-	-	-	35 RM 110	-	-	35 RS 110	-	-	-	-	-
34	3/8"	.063	110	-	-	36 RM3 110	36 RS3 110	36 RD3 110	-	-	36 RM 110	-	-	36 RS 110	-	-	-	-	-
36	3/8"	.063	115	-	-	36 RM3 115	36 RS3 115	36 RD3 115	-	-	36 RM 115	-	-	36 RS 115	-	-	-	-	-
37	3/8"	.058	119	-	-	-	-	-	-	-	35 RM 119	-	-	35 RS 119	-	-	-	-	-
		.063	119	-	-	36 RM3 119	36 RS3 119	36 RD3 119	-	-	36 RM 119	-	-	36 RS 119	-	-	-	-	-
42	3/8"	.063	135	-	-	36 RM3 135	36 RS3 135	36 RD3 135	-	-	36 RM 135	-	-	36 RS 135	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS															
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	● STIHL PICCO™ Micro™ 3	● STIHL PICCO™ Duro 3	● STIHL RAPID™ Micro™ 3	● STIHL RAPID™ Super 3	● STIHL RAPID™ Duro 3	● STIHL PICCO™ Micro™	● STIHL PICCO™ Super	● STIHL RAPID™ Micro™	● STIHL RAPID™ Micro™ H	● STIHL RAPID™ Micro™ K	● STIHL RAPID™ Super	● STIHL RAPID™ Super F	● STIHL RAPID™ Super K	● STIHL RAPID™ Super L	● STIHL RAPID™ Super LH	● STIHL RAPID™ Super LF
6900, 7700, 8500																			
16	3/8"	.050	60	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	-	-	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	64	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	-	-	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.050	66	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	-	-	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8"	.050	70	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	-	-	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
		.058	70	-	-	-	-	-	-	-	35 RM 70	-	-	35 RS 70	-	-	-	-	-
21	3/8"	.063	79	-	-	36 RM3 79	36 RS3 79	36 RD3 79	-	-	36 RM 79	-	-	36 RS 79	-	-	-	-	-
24	3/8"	.050	81	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	-	-	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
27	3/8"	.050	93	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	-	-	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
32	3/8"	.063	105	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	-	-	36 RS 105	-	-	-	-	-
36	.404	.063	106	-	-	-	-	-	-	-	46 RM 106	46 RMH 106	46 RMK 106	46 RS 106	46 RSF 106	-	-	-	-
	3/8"	.063	117	-	-	36 RM3 117	36 RS3 117	36 RD3 117	-	-	36 RM 117	-	-	36 RS 117	-	-	-	-	-
MICRO 25 PS																			
14	3/8" P	.050	52	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS					
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count	● STIHL PICCO™ Micro™ Mini 3	● STIHL PICCO™ Micro™ 3	● STIHL PICCO™ Duro 3	● STIHL RAPID™ Super 3	● STIHL PICCO™ Micro™	● STIHL PICCO™ Super
PP 300, PP 400, PP 600, PP 800, PP 1200, PP 1250, PP 1260, PP 1400, P 1400-D, PPF-2100, PPT-2100, PPF-2400, PPT-2400, PPSR-2122, PPSR-2433									
8	3/8" P	.050	33	-	63 PM3 33	63 PD3 33	63 PS3 33	63 PM 33	63 PS 33
10	3/8" P	.043	39	61 PMM3 39	-	-	-	-	-
		.050	39	-	63 PM3 39	63 PD3 39	63 PS3 39	63 PM 39	63 PS 39
12	3/8" P	.043	44	61 PMM3 44	-	-	-	-	-
		.050	44	-	63 PM3 44	63 PD3 44	63 PS3 44	63 PM 44	63 PS 44

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
G 250, G 300 AVS, G 300 TS, G 310 TS, G 2500, G 2500 TS, G 3100, G 4100, GZ 4000																		
12	3/8" P	.043	45	61 PMM3 45	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		45	-	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-	
		47	-	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-	
14	3/8" P	.043	52	61 PMM3 52	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	52	-	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
		.043	56	61 PMM3 56	-	-	-	-	-	-	-	-	-	-	-	-	-	-
16	3/8" P	.050	56	-	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-
		58	-	63 PM3 58	63 PD3 58	-	63 PS3 58	-	63 PM 58	63 PS 58	-	-	-	-	-	-	-	
		.050	62	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
18	3/8" P	.050	62	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
G 390, G 450 AVS, G 455 AVS, G 3800, G 3800 AVS, G 5000, G 5000 AVS																		
11	.325	.058	52	-	-	-	25 RM3 52	-	25 RD3 52	-	-	25 RM 52	25 RS 52	-	-	-	-	-
13	.325	.050	56	-	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	23 RS 56	-	-	-	-	-
		.058	56	-	-	-	25 RM3 56	-	25 RD3 56	-	-	25 RM 56	25 RS 56	-	-	-	-	-
		.050	64	-	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	23 RS 64	-	-	-	-	-
15	.325	.058	64	-	-	-	25 RM3 64	-	25 RD3 64	-	-	25 RM 64	25 RS 64	-	-	-	-	-
		.050	66	-	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-
		.058	66	-	-	-	25 RM3 66	-	25 RD3 66	-	-	25 RM 66	25 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-
		.058	72	-	-	-	25 RM3 72	-	25 RD3 72	-	-	25 RM 72	25 RS 72	-	-	-	-	-
		.050	78	-	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-
20	.325	.058	78	-	-	-	25 RM3 78	-	25 RD3 78	-	-	25 RM 78	25 RS 78	-	-	-	-	-
G 561 AVS																		
16	.325	.050	68	-	-	-	23 RM3 68	-	23 RD3 68	-	-	23 RM 68	23 RS 68	-	-	-	-	-
18	.325	.050	74	-	-	-	23 RM3 74	-	23 RD3 74	-	-	23 RM 74	23 RS 74	-	-	-	-	-
		79	-	-	-	23 RM3 79	-	23 RD3 79	-	-	23 RM 79	23 RS 79	-	-	-	-	-	
		.050	91	-	-	-	23 RM3 91	-	23 RD3 91	-	-	23 RM 91	23 RS 91	-	-	-	-	-
G 621 AVS																		
16	3/8"	.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	64	-	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		66	-	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66	
		.050	70	-	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
24	3/8"	.050	81	-	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
27	3/8"	.050	92	-	-	-	33 RM3 92	33 RS3 92	33 RD3 92	-	-	33 RM 92	33 RS 92	33 RSF 92	33 RSK 92	33 RSL 92	33 RSLH 92	33 RSLF 92
PRO GZ 25 N, PSZ 2500 S																		
12	3/8" P	.043	44	61 PMM3 44	-	-	-	-	-	-	-	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

*THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
35201																		
20	.325	.050	78	-	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-
35256																		
16	3/8" P	.050	59	-	63 PM3 59	63 PD3 59	-	63 PS3 59	-	63 PM 59	63 PS 59	-	-	-	-	-	-	-
79245																		
8	3/8" P	.043	34	61 PMM3 34	-	-	-	-	-	-	-	-	-	-	-	-	-	-
10	3/8" P	.043	40	61 PMM3 40	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3400, 3401, 3402, 3407, 3411, 3412, 3414, 3415, 3425, 3445, 3455, 3460, 3461, 3476, 34071, 34115, 34116, 35023, 35025, 35027, 35028, 35037, 35038, 35044, 35046, 35048, 35056, 35058, 35060, 35080, 35081, 35082, 35091, 35093, 35095, 35096, 35202, 35203, 35205, 35206, 35207, 35209, 35211, 35212, 35216, 35219, 35224, 35231, 35232, 35235, 35238, 35255, 35256, 35270, 35273, 35280, 35283, 35363, 35366, 5367, 35504, 35505, 35506, 35508, 35512, 35514, 35515, 35516, 35713, 35714, 35717, 35718, 35736, 35824, 358341040, 358350810, 358350670, 358360360, 358360380, 35841, 35886, 351040, 351140, 352680, 36010, 36012, 36015, 36017, 36080, 36082, 36085, 36087																		
12	3/8" P	.043	45	61 PMM3 45	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	45	-	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-
			47	-	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-
14	3/8" P	.043	52	61 PMM3 52	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	52	-	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
16	3/8" P	.043	56	61 PMM3 56	-	-	-	-	-	-	-	-	-	-	-	-	-	-
			56	-	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-
		.050	58	-	63 PM3 58	63 PD3 58	-	63 PS3 58	-	63 PM 58	63 PS 58	-	-	-	-	-	-	-
18	3/8" P	.050	62	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
3403, 3416, 3417, 3470, 3471, 3481																		
14	3/8" P	.050	52	-	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
34107 - ELECTRIC EZ TOOL-LESS CHAIN TENSIONING, 35081 - GAS EZ ADJUST BAR, 41 AZ 63 NQ 799																		
16	3/8" P	.050	55	-	63 PM3 55	63 PD3 55	-	63 PS3 55	-	63 PM 55	63 PS 55	-	-	-	-	-	-	-
18	3/8" P	.050	62	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
35020, 35119, 35120, 35121, 35492, 35607, 35624, 35624.2, 35628, 5633																		
16	.325	.050	66	-	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-
35084, 41 AY 85 AR 799																		
18	3/8" P	.050	66	-	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
35145, 35212, 35483, 35608, 35609, 35690, 35721, 35727, 35728, 35826, 35829, 35851, 35881, 35885 ELECTRICS (1983 MODELS FORWARD), 35887, 35889																		
15	3/8" P	.050	57	-	-	-	33 RM3 57	33 RS3 57	33 RD3 57	-	-	33 RM 57	33 RS 57	33 RSF 57	33 RSK 57	33 RSL 57	33 RSLH 57	33 RSLF 57
16	3/8" P	.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8" P	.050	64	-	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
		.050	66	-	33 RM3 66	33 RS3 66	33 RD3 66	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66			
20	3/8" P	.050	70	-	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
24	3/8" P	.050	81	-	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
27	3/8" P	.050	92	-	-	-	33 RM3 92	33 RS3 92	33 RD3 92	-	-	33 RM 92	33 RS 92	33 RSF 92	33 RSK 92	33 RSL 92	33 RSLH 92	33 RSLF 92
35507 PS																		
16	3/8" P	.050	56	-	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	 STIHL PICCO™ Micro™ Mini 3	 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Micro™ 3	 STIHL RAPID™ Super 3	 STIHL RAPID™ Duro 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super	 STIHL RAPID™ Micro™	 STIHL RAPID™ Super	 STIHL RAPID™ Super F	 STIHL RAPID™ Super K	 STIHL RAPID™ Super L	 STIHL RAPID™ Super LH	 STIHL RAPID™ Super LF
104 P, 180, 285 S, 300, 345, 350, 352, 352 S, 357, 360, E 305 AV																		
14	3/8" P	.050	52	-	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
			53	-	63 PM3 53	63 PD3 53	-	63 PS3 53	-	63 PM 53	63 PS 53	-	-	-	-	-	-	-
16	3/8" P	.050	57	-	63 PM3 57	63 PD3 57	-	63 PS3 57	-	63 PM 57	63 PS 57	-	-	-	-	-	-	-
			59	-	63 PM3 59	63 PD3 59	-	63 PS3 59	-	63 PM 59	63 PS 59	-	-	-	-	-	-	-
18	3/8" P	.050	62	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
			63	-	63 PM3 63	63 PD3 63	-	63 PS3 63	-	63 PM 63	63 PS 63	-	-	-	-	-	-	-
360, 366, 377, 400, 415, 416, 446 S, 450, 451, 488, 488 S, 500																		
13	.325	.050	56	-	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	23 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	23 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-
550, 575, 577																		
13	3/8"	.058	52	-	-	-	-	-	-	-	-	35 RM 52	35 RS 52	-	-	-	-	-
15	3/8"	.058	56	-	-	-	-	-	-	-	-	35 RM 56	35 RS 56	-	-	-	-	-
16	3/8"	.058	60	-	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.058	68	-	-	-	-	-	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-
20	3/8"	.058	72	-	-	-	-	-	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
24	3/8"	.050	84	-	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
		.058	84	-	-	-	-	-	-	-	-	35 RM 84	35 RS 84	-	-	-	-	-
28	3/8"	.058	92	-	-	-	-	-	-	-	-	35 RM 92	35 RS 92	-	-	-	-	-
680, 695, 757, 757 C, 757 W																		
13	3/8"	.058	52	-	-	-	-	-	-	-	-	35 RM 52	35 RS 52	-	-	-	-	-
15	3/8"	.058	56	-	-	-	-	-	-	-	-	35 RM 56	35 RS 56	-	-	-	-	-
		.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
16	3/8"	.058	60	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-	
		.050	68	-	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
18	3/8"	.058	68	-	-	-	-	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-	
		.050	72	-	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
20	3/8"	.058	72	-	-	-	-	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-	
		.063	72	-	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	36 RS 72	-	-	-	-	-
22	3/8"	.050	76	-	-	-	33 RM3 76	33 RS3 76	33 RD3 76	-	-	33 RM 76	33 RS 76	33 RSF 76	33 RSK 76	33 RSL 76	33 RSLH 76	33 RSLF 76
		.050	84	-	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
24	3/8"	.058	84	-	-	-	-	-	-	-	35 RM 84	35 RS 84	-	-	-	-	-	
		.063	84	-	-	-	36 RM3 84	36 RS3 84	36 RD3 84	-	-	36 RM 84	36 RS 84	-	-	-	-	-
28	3/8"	.050	93	-	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
		.058	93	-	-	-	-	-	-	-	35 RM 93	35 RS 93	-	-	-	-	-	-
30	3/8"	.063	93	-	-	-	36 RM3 93	36 RS3 93	36 RD3 93	-	-	36 RM 93	36 RS 93	-	-	-	-	-
		.050	98	-	-	-	33 RM3 98	33 RS3 98	33 RD3 98	-	-	33 RM 98	33 RS 98	33 RSF 98	33 RSK 98	33 RSL 98	33 RSLH 98	33 RSLF 98
32	3/8"	.063	98	-	-	-	36 RM3 98	36 RS3 98	36 RD3 98	-	-	36 RM 98	36 RS 98	-	-	-	-	-
		.050	105	-	-	-	33 RM3 105	33 RS3 105	33 RD3 105	-	-	33 RM 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RSLF 105
33	3/8"	.063	105	-	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	36 RS 105	-	-	-	-	-
		.058	110	-	-	-	-	-	-	-	35 RM 110	35 RS 110	-	-	-	-	-	-
34	3/8"	.063	110	-	-	-	36 RM3 110	36 RS3 110	36 RD3 110	-	-	36 RM 110	36 RS 110	-	-	-	-	-
36	3/8"	.063	115	-	-	-	36 RM3 115	36 RS3 115	36 RD3 115	-	-	36 RM 115	36 RS 115	-	-	-	-	-
37	3/8"	.058	119	-	-	-	-	-	-	-	-	35 RM 119	35 RS 119	-	-	-	-	-
		.063	119	-	-	-	36 RM3 119	36 RS3 119	36 RD3 119	-	-	36 RM 119	36 RS 119	-	-	-	-	-
42	3/8"	.063	135	-	-	-	36 RM3 135	36 RS3 135	36 RD3 135	-	-	36 RM 135	36 RS 135	-	-	-	-	-
90, 100, 110, 120, 140, 150, ELECTRIC, 160 ELECTRIC, 300, 300 S																		
12	3/8" P	.043	45	61 PMM3 45	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	45	-	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-
		.050	47	-	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-
14	3/8" P	.043	52	61 PMM3 52	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	52	-	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS														
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH	STIHL RAPID™ Super LF
16	3/8" P	.043	56	61 PMM3 56	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	56	-	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-
			57	-	63 PM3 57	63 PD3 57	-	63 PS3 57	-	63 PM 57	63 PS 57	-	-	-	-	-	-	-
18	3/8" P	.050	62	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
P 230, P 231, PRUNER ATTACHMENT #78701, PRUNER TOOL #65002																		
8	3/8" P	.043	33	61 PMM3 33	-	-	-	-	-	-	-	-	-	-	-	-	-	-
10	3/8" P	.043	39	61 PMM3 39	-	-	-	-	-	-	-	-	-	-	-	-	-	-
12	3/8" P	.043	44	61 PMM3 44	-	-	-	-	-	-	-	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH	STIHL RAPID™ Super LF
603, 662, 667, 670, 680, 690, 694																		
13	3/8"	.058	52	-	-	-	-	-	-	-	-	35 RM 52	35 RS 52	-	-	-	-	-
15	3/8"	.058	56	-	-	-	-	-	-	-	-	35 RM 56	35 RS 56	-	-	-	-	-
16	3/8"	.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
		.058	60	-	-	-	-	-	-	-	-	35 RM 60	35 RS 60	-	-	-	-	-
18	3/8"	.050	68	-	-	-	33 RM3 68	33 RS3 68	33 RD3 68	-	-	33 RM 68	33 RS 68	33 RSF 68	33 RSK 68	33 RSL 68	33 RSLH 68	33 RSLF 68
		.058	68	-	-	-	-	-	-	-	-	35 RM 68	35 RS 68	-	-	-	-	-
20	3/8"	.050	72	-	-	-	33 RM3 72	33 RS3 72	33 RD3 72	-	-	33 RM 72	33 RS 72	33 RSF 72	33 RSK 72	33 RSL 72	33 RSLH 72	33 RSLF 72
		.058	72	-	-	-	-	-	-	-	-	35 RM 72	35 RS 72	-	-	-	-	-
22	3/8"	.063	72	-	-	-	36 RM3 72	36 RS3 72	36 RD3 72	-	-	36 RM 72	36 RS 72	-	-	-	-	-
		.050	76	-	-	-	33 RM3 76	33 RS3 76	33 RD3 76	-	-	33 RM 76	33 RS 76	33 RSF 76	33 RSK 76	33 RSL 76	33 RSLH 76	33 RSLF 76
24	3/8"	.050	84	-	-	-	33 RM3 84	33 RS3 84	33 RD3 84	-	-	33 RM 84	33 RS 84	33 RSF 84	33 RSK 84	33 RSL 84	33 RSLH 84	33 RSLF 84
		.058	84	-	-	-	-	-	-	-	-	35 RM 84	35 RS 84	-	-	-	-	-
28	3/8"	.063	84	-	-	-	36 RM3 84	36 RS3 84	36 RD3 84	-	-	36 RM 84	36 RS 84	-	-	-	-	-
		.050	93	-	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
30	3/8"	.058	93	-	-	-	-	-	-	-	-	35 RM 93	35 RS 93	-	-	-	-	-
		.063	93	-	-	-	36 RM3 93	36 RS3 93	36 RD3 93	-	-	36 RM 93	36 RS 93	-	-	-	-	-
32	3/8"	.050	98	-	-	-	33 RM3 98	33 RS3 98	33 RD3 98	-	-	33 RM 98	33 RS 98	33 RSF 98	33 RSK 98	33 RSL 98	33 RSLH 98	33 RSLF 98
		.063	98	-	-	-	36 RM3 98	36 RS3 98	36 RD3 98	-	-	36 RM 98	36 RS 98	-	-	-	-	-
33	3/8"	.050	105	-	-	-	33 RM3 105	33 RS3 105	33 RD3 105	-	-	33 RM 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RSLF 105
		.063	105	-	-	-	36 RM3 105	36 RS3 105	36 RD3 105	-	-	36 RM 105	36 RS 105	-	-	-	-	-
33	3/8"	.058	110	-	-	-	-	-	-	-	-	35 RM 110	35 RS 110	-	-	-	-	-
34	3/8"	.063	110	-	-	-	36 RM3 110	36 RS3 110	36 RD3 110	-	-	36 RM 110	36 RS 110	-	-	-	-	-
36	3/8"	.063	115	-	-	-	36 RM3 115	36 RS3 115	36 RD3 115	-	-	36 RM 115	36 RS 115	-	-	-	-	-
37	3/8"	.058	119	-	-	-	-	-	-	-	-	35 RM 119	35 RS 119	-	-	-	-	-
		.063	119	-	-	-	36 RM3 119	36 RS3 119	36 RD3 119	-	-	36 RM 119	36 RS 119	-	-	-	-	-
42	3/8"	.063	135	-	-	-	36 RM3 135	36 RS3 135	36 RD3 135	-	-	36 RM 135	36 RS 135	-	-	-	-	-
614, 631, 632, 634, 638, 639, 641, 644, 645, 647, 650, 651, 651 SP, 654																		
13	.325	.050	56	-	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	23 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	23 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-
		.058	67	-	-	-	23 RM3 67	-	23 RD3 67	-	-	23 RM 67	23 RS 67	-	-	-	-	-
18	.325	.050	72	-	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-
		.058	73	-	-	-	23 RM3 73	-	23 RD3 73	-	-	23 RM 73	23 RS 73	-	-	-	-	-
20	.325	.050	78	-	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-
		.058	79	-	-	-	23 RM3 79	-	23 RD3 79	-	-	23 RM 79	23 RS 79	-	-	-	-	-
18	3/8" P	.050	62	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
14	3/8" P	.050	52	-	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
16	3/8" P	.050	56	-	63 PM3 56	63 PD3 56	-	63 PS3 56	-	63 PM 56	63 PS 56	-	-	-	-	-	-	-
18	3/8" P	.050	62	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS				SAW CHAINS														
Guide bar length (inch)*	Pitch	Drive link gauge/ groove width (inch)	Drive link count	STIHL PICCO™ Micro™ Mini 3	STIHL PICCO™ Micro™ 3	STIHL PICCO™ Duro 3	STIHL RAPID™ Micro™ 3	STIHL RAPID™ Super 3	STIHL RAPID™ Duro 3	STIHL PICCO™ Micro™	STIHL PICCO™ Super	STIHL RAPID™ Micro™	STIHL RAPID™ Super	STIHL RAPID™ Super F	STIHL RAPID™ Super K	STIHL RAPID™ Super L	STIHL RAPID™ Super LH	STIHL RAPID™ Super LF
CS-415, ECS-4000, ECV-4501																		
13	.325	.050	56	-	-	-	23 RM3 56	-	23 RD3 56	-	-	23 RM 56	23 RS 56	-	-	-	-	-
15	.325	.050	64	-	-	-	23 RM3 64	-	23 RD3 64	-	-	23 RM 64	23 RS 64	-	-	-	-	-
16	.325	.050	66	-	-	-	23 RM3 66	-	23 RD3 66	-	-	23 RM 66	23 RS 66	-	-	-	-	-
18	.325	.050	72	-	-	-	23 RM3 72	-	23 RD3 72	-	-	23 RM 72	23 RS 72	-	-	-	-	-
20	.325	.050	78	-	-	-	23 RM3 78	-	23 RD3 78	-	-	23 RM 78	23 RS 78	-	-	-	-	-
ECS-35, ECS-290, ECS-300, ECS-320, ECS-330, ECS-350, ECS- 51, ECS-355, ECS-356, ECS-370, ECS-405, ECS-3301, ECS-3351, ECS-3401, ECS-3500																		
12	3/8" P	.043	45	61 PMM3 45	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	45	-	63 PM3 45	63 PD3 45	-	63 PS3 45	-	63 PM 45	63 PS 45	-	-	-	-	-	-	-
			47	-	63 PM3 47	63 PD3 47	-	63 PS3 47	-	63 PM 47	63 PS 47	-	-	-	-	-	-	-
14	3/8" P	.043	52	61 PMM3 52	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	52	-	63 PM3 52	63 PD3 52	-	63 PS3 52	-	63 PM 52	63 PS 52	-	-	-	-	-	-	-
16	3/8" P	.043	56	61 PMM3 56	-	-	-	-	-	-	-	-	-	-	-	-	-	-
		.050	57	-	63 PM3 57	63 PD3 57	-	63 PS3 57	-	63 PM 57	63 PS 57	-	-	-	-	-	-	-
			58	-	63 PM3 58	63 PD3 58	-	63 PS3 58	-	63 PM 58	63 PS 58	-	-	-	-	-	-	-
18	3/8" P	.050	62	-	63 PM3 62	63 PD3 62	-	63 PS3 62	-	63 PM 62	63 PS 62	-	-	-	-	-	-	-
ECS-505, ECS-506																		
16	3/8"	.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	64	-	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
			66	-	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8"	.050	70	-	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
24	3/8"	.050	81	-	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
27	3/8"	.050	92	-	-	-	33 RM3 92	33 RS3 92	33 RD3 92	-	-	33 RM 92	33 RS 92	33 RSF 92	33 RSK 92	33 RSL 92	33 RSLH 92	33 RSLF 92
28	3/8"	.050	93	-	-	-	33 RM3 93	33 RS3 93	33 RD3 93	-	-	33 RM 93	33 RS 93	33 RSF 93	33 RSK 93	33 RSL 93	33 RSLH 93	33 RSLF 93
ECS-650, ECS-655																		
16	3/8"	.050	60	-	-	-	33 RM3 60	33 RS3 60	33 RD3 60	-	-	33 RM 60	33 RS 60	33 RSF 60	33 RSK 60	33 RSL 60	33 RSLH 60	33 RSLF 60
18	3/8"	.050	64	-	-	-	33 RM3 64	33 RS3 64	33 RD3 64	-	-	33 RM 64	33 RS 64	33 RSF 64	33 RSK 64	33 RSL 64	33 RSLH 64	33 RSLF 64
			66	-	-	-	33 RM3 66	33 RS3 66	33 RD3 66	-	-	33 RM 66	33 RS 66	33 RSF 66	33 RSK 66	33 RSL 66	33 RSLH 66	33 RSLF 66
20	3/8"	.050	70	-	-	-	33 RM3 70	33 RS3 70	33 RD3 70	-	-	33 RM 70	33 RS 70	33 RSF 70	33 RSK 70	33 RSL 70	33 RSLH 70	33 RSLF 70
24	3/8"	.050	81	-	-	-	33 RM3 81	33 RS3 81	33 RD3 81	-	-	33 RM 81	33 RS 81	33 RSF 81	33 RSK 81	33 RSL 81	33 RSLH 81	33 RSLF 81
28	3/8"	.050	92	-	-	-	33 RM3 92	33 RS3 92	33 RD3 92	-	-	33 RM 92	33 RS 92	33 RSF 92	33 RSK 92	33 RSL 92	33 RSLH 92	33 RSLF 92
32	3/8"	.050	105	-	-	-	33 RM3 105	33 RS3 105	33 RD3 105	-	-	33 RM 105	33 RS 105	33 RSF 105	33 RSK 105	33 RSL 105	33 RSLH 105	33 RSLF 105
TPS 200 (ATTACHMENT), TPS 210, TPS 250, TPS 250 PF, TPS 270, TPS 270 PF, TPS 2510																		
10	3/8" P	.043	40	61 PMM3 40	-	-	-	-	-	-	-	-	-	-	-	-	-	-
12	3/8" P	.043	45	61 PMM3 45	-	-	-	-	-	-	-	-	-	-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.

GUIDE BARS					SAW CHAINS				
Guide bar length (Inch)*	Pitch	Drive link gauge/ groove width (Inch)	Drive link count		 STIHL PICCO™ Micro™ 3	 STIHL PICCO™ Duro 3	 STIHL RAPID™ Super 3	 STIHL PICCO™ Micro™	 STIHL PICCO™ Super
TB 3516, TB 4516									
16	3/8" P	.050	55		63 PM3 55	63 PD3 55	63 PS3 55	63 PM 55	63 PS 55
TB 4016, TB 4218									
16	3/8" P	.050	54		63 PM3 54	63 PD3 54	63 PS3 54	63 PM 54	63 PS 54
18	3/8" P	.050	60		63 PM3 60	63 PD3 60	63 PS3 60	63 PM 60	63 PS 60
TB 4620, TB 4920, TB 5020									
20	.325	.050	78		-	-	-	-	-
TB 5018									
18	.325	.050	72		-	-	-	-	-

* THE ACTUAL CUTTING LENGTH MAY BE LESS THAN THE STATED GUIDE BAR LENGTH, DEPENDING ON SAW MODEL HOUSING DESIGN.



STIHL PROFESSIONAL CHAIN SHARPENING TOOLS


Product	Order Number	Chain Type	File Size (Diameter)
Filing Kit (Complete) 	5605 007 1027	1/4"	5/32"
	5605 007 1000	1/4" PICCO	1/8"
	5605 007 1028	.325"	3/16"
	5605 007 1029	3/8"	13/64"
	5605 007 1027	3/8" PICCO	5/32"
	5605 007 1030	.404"	7/32"
	5607 007 1000	3/8" HEXA	5.2mm 13/68"
File Guide w/File & Handle 	5605 750 4327	1/4"	5/32"
	5605 750 4300	1/4" PICCO	1/8"
	5605 750 4328	.325"	3/16"
	5605 750 4329	3/8"	13/64"
	5605 750 4327	3/8" PICCO	5/32"
	5605 750 4330	.404"	7/32"
Depth Gauge Tool 	1110 893 4000	1/4"	
	0000 893 4005	1/4" PICCO	
	1110 893 4000	.325"	
	1110 893 4000	3/8"	
	1110 893 4000	3/8" PICCO	
Basic Filing Kit: HEXA file and handle 	1106 893 4000	.404"	
	7010 881 9406	3/8" HEXA	5.2mm 13/68"

* FOR SQUARE GROUND CHAIN USE SPECIAL FILE (7010 871 0282) LISTED BELOW.

STIHL FILE ORDER NUMBERS

Product	Order Number	File Size	File Profile
1 box = 4 x 3-pack of files	7010 871 0400	1/4"	●
	7010 871 0401	5/32"	●
	7010 871 0402	11/64"	●
	7010 871 0403	3/16"	●
	7010 871 0404	13/64"	●
	7010 871 0405	7/32"	●
	7010 871 1220	9/64"	●
1 box = 6 x 2 pack of files	7010 871 0043	Flat file	■
	7010 871 0282	Triangular file for square ground chain	△
1 box = 12 individually packed files	5607 772 5201	5.2mm 13/68"	●

STIHL ACCESSORIES

Product		Order Number	Chain Type	File Size (Diameter)
Swiss Handle File		0814 498 1501	-	-
Standard File Handle		0811 490 7863	-	-
Deluxe File Handle		0000 881 4500	-	-
Soft Grip Handle for Round File		0000 881 4502	-	-
Soft Grip Handle for Flat File		0000 881 4503	-	-
Filing Guide 2-in-1		5605 750 4306	1/4" PICCO	-
		5605 750 4304	.325"	-
		5605 750 4305	3/8"	-
		5605 750 4303	3/8" PICCO	-
		0000 750 4300	.404"	-
FF1 File Guide Holder		5614 000 7504	1/4" PICCO	1/8"
		5614 000 7501	.325"	3/16"
		5614 000 7500	3/8"	13/64"
		5614 000 7502	3/8" PICCO	5/32"
		5614 000 7503	3/8" PMM3	5/32"
		5614 000 7505	.404"	7/32"
FG4 Roller Filing Guide		5612 000 7500	3/8"	13/64"
		5612 000 7503	3/8" PMM3	5/32"
		5612 000 7502	3/8" PICCO	5/32"
		5612 000 7501	.325"	3/16"
Dressing Tool Guide Bar Dressing Tool		5605 773 4400	-	-
Replacement File		5605 773 4200	-	-

STIHL ACCESSORIES

Product	Order Number	Stone Diameter	Use for Chain Pitch
12 V Chain Grinder	0000 882 4001		
Grinding Stones for Electric Grinder	0000 882 4100	1/4" (6.35 mm)	Depth Gauge
	0000 882 4105	13/64" (5.2 mm)	3/8"
	0000 882 4103	7/32" (5.5 mm)	.404"
	0000 882 4101	3/16" (4.8 mm)	.325"
	0000 882 4102	5/32" (4.0 mm)	3/8" PICCO
	0000 882 4104	9/64" (3.5 mm)*	
	7010 881 4800	1/8"	1/4" PICCO

*THREE STONES PER BOX

STIHL / OREGON® / CARLTON® / WINDSOR®

			Pitch		Drive link gauge		Oregon®	Carlton®	Windsor®
			mm	in.	mm	in.			
STIHL RAPID™ Micro™	13 RM	3660	6.35	1/4"	1.3	.050	25AP	EIMC-BL	50K
STIHL RAPID™ Micro™ Super	13 RMS	3661	6.35	1/4"	1.3	.050	25A	EIMC-BL	50K
STIHL RAPID™ Micro™	23 RM	3684	8.25	.325"	1.3	.050	20BPX, 95TXL	K1C	50J
STIHL RAPID™ Micro™ 3	23 RM3	3687	8.25	.325"	1.3	.050	20BPX	K1C-BL	50JG
STIHL RAPID™ Super	23 RS	3637	8.25	.325"	1.3	.050	20LPX, 33LGX	K1L	50JL
STIHL RAPID™ Duro 3	23 RD3	3665	8.25	.325"	1.3	.050	M20LPX	-	-
STIHL RAPID™ Micro™	25 RM	3685	8.25	.325"	1.5	.058	21BPX	K2C	58J
STIHL RAPID™ Micro™ 3	25 RM3	3688	8.25	.325"	1.5	.058	21BPX	K2C-BL	58JG
STIHL RAPID™ Super	25 RS	3638	8.25	.325"	1.5	.058	21LPX, 34LGX	K2L	58JL
STIHL RAPID™ Duro 3	25 RD3	3666	8.25	.325"	1.5	.058	M21LPX	-	-
STIHL RAPID™ Micro™	26 RM	3686	8.25	.325"	1.6	.063	22BPX	K3C	63J
STIHL RAPID™ Micro™ 3	26 RM3	3689	8.25	.325"	1.6	.063	22BPX	K3C-BL	63JG
STIHL RAPID™ Super	26 RS	3639	8.25	.325"	1.6	.063	22LPX, 35LGX	K3L	63JL
STIHL RAPID™ Duro 3	26 RD3	3667	8.25	.325"	1.6	.063	M22LPX	-	-
STIHL PICCO™ Micro™ Mini 3	61 PMM3	3610	9.32	3/8" P	1.1	.043	90PX	N4C-BL	-
STIHL PICCO™ Micro™	63 PM	3613	9.32	3/8" P	1.3	.050	91VXL	N1C	50R
STIHL PICCO™ Micro™ 3	63 PM3	3636	9.32	3/8" P	1.3	.050	91PX, 91PXL	N1C-BL	50RG
STIHL PICCO™ Duro 3	63 PD3	3612	9.32	3/8" P	1.3	.050	M91VXL	-	-
STIHL PICCO™ Micro™ X	63 PMX	3614	9.32	3/8" P	1.3	.050	91R	-	-
STIHL RAPID™ Micro™	33 RM	3989	9.32	3/8"	1.3	.050	72DPX	A1EP	50A
STIHL RAPID™ Micro™ F	33 RMF	3654	9.32	3/8"	1.3	.050	72APX	-	-
STIHL RAPID™ Super	33 RS	3623	9.32	3/8"	1.3	.050	72LPX/EXL	A1LM	50AL, 50ALG
STIHL RAPID™ Super 3	33 RS3	3624	9.32	3/8"	1.3	.050	72V	A1LM-GL	50ALG
STIHL RAPID™ Super K	33 RSK	3874	9.32	3/8"	1.3	.050	72LPX	-	50AL
STIHL RAPID™ Super L	33 RSL	3679	9.32	3/8"	1.3	.050	72CL	-	-
STIHL RAPID™ Super F	33 RSF	3676	9.32	3/8"	1.3	.050	72JGX/72JPX	A1L-SK	50ALX
STIHL RAPID™ Super LF	33 RSLF	3672	9.32	3/8"	1.3	.050	72CJ	-	-
STIHL RAPID™ Super LH	33 RSLH	3674	9.32	3/8"	1.3	.050	72CK	-	-
STIHL RAPID™ Duro 3	33 RD3	3681	9.32	3/8"	1.3	.050	M72LPX	-	-
STIHL RAPID™ Micro™	35 RM	3990	9.32	3/8"	1.5	.058	73DPX	A2EP	58A
STIHL RAPID™ Super	35 RS	3622	9.32	3/8"	1.5	.058	73LPX/EXL	A2LM	58AL, 58ALG
STIHL RAPID™ Super K	35 RSK	3893	9.32	3/8"	1.5	.058	73LPX	-	58AL
STIHL RAPID™ Super F	35 RSF	3913	9.32	3/8"	1.5	.058	73JGX/73JPX	A2L-SK	58ALX
STIHL RAPID™ Duro 3	35 RD3	3682	9.32	3/8"	1.5	.058	M73LPX	-	-
STIHL RAPID™ Micro™	36 RM	3991	9.32	3/8"	1.6	.063	75DPX	A3EP	63A
STIHL RAPID™ Micro™ X	36 RMX	3901	9.32	3/8"	1.6	.063	75RD	-	-
STIHL RAPID™ Super 3	36 RS3	3626	9.32	3/8"	1.6	.063	75LV	A3LM-GL	63ALG
STIHL RAPID™ Super	36 RS	3621	9.32	3/8"	1.6	.063	75LPX/EXL	-	-
STIHL RAPID™ Super K	36 RSK	3898	9.32	3/8"	1.6	.063	75LPX	-	63AL

STIHL / OREGON® / CARLTON® / WINDSOR®

			Pitch		Drive link gauge		Oregon®	Carlton®	Windsor®
			mm	in.	mm	in.			
STIHL RAPID™ Super L	36 RSL	3680	9.32	3/8"	1.6	.063	75CL	-	-
STIHL RAPID™ Super LF	36 RSLF	3673	9.32	3/8"	1.6	.063	75CJ	-	-
STIHL RAPID™ Super LH	36 RSLH	3675	9.32	3/8"	1.6	.063	75CK	-	-
STIHL RAPID™ Duro 3	36 RD3	3683	9.32	3/8"	1.6	.063	M75LPX	-	-
STIHL RAPID™ Super F	45 RSF	3924	10.26	.404	1.5	.058	58J	B2L-SK	-
STIHL RAPID™ Micro™	46 RM	3668	10.26	.404	1.6	.063	27X	-	63B
STIHL RAPID™ Micro™ K	46 RMK	3860	10.26	.404	1.6	.063	27X	B3S	-
STIHL RAPID™ Micro™ F	46 RMF	3671	10.26	.404	1.6	.063	27AX	-	-
STIHL RAPID™ Micro™ X	46 RMX	3838	10.26	.404	1.6	.063	-	B3H-RP	63BR
STIHL RAPID™ Super	46 RS	3946	10.26	.404	1.6	.063	59L, 68LX	B3LM	-
STIHL RAPID™ Super K	46 RSK	3846	10.26	.404	1.6	.063	59L, 68LX	-	-
STIHL RAPID™ Super L	46 RSL	3877	10.26	.404	1.6	.063	68CL	-	-
STIHL RAPID™ Super F	46 RSF	3911	10.26	.404	1.6	.063	59J, 68JX	-	-

GENERAL INFORMATION AND TRADEMARKS



GENERAL INFORMATION

1. STIHL products sold through U.S. dealers are for distribution in the United States only.
2. The STIHL philosophy is to continually improve all of our products. As a result, engineering changes and improvements are made from time to time. Specifications and photos are as of Oct. 1, 2023 and are subject to change without notice.
3. This catalog and all its contents are copyright protected. All rights are reserved, particularly alteration, translation, and reproduction using electronic systems.

TRADEMARKS

The following trademarks as used in this Bar and Chain Catalog are owned by ANDREAS STIHL AG & Co. KG, Waiblingen: March 1, 2023

STIHL's Registered Trademarks

- **STIHL**
- FARM BOSS®
- MAGNUM®
- OILOMATIC®
- STIHL DUROMATIC®
- STIHL Quickstop®
- STIHL ROLLOMATIC®
- STIHL WOOD BOSS®
- TIMBERSPORTS®
- WOOD BOSS®

Some of STIHL's Common Law Trademarks

- Ematic™
- HEXA™
- Micro™
- STIHL M-Tronic™
- STIHL PICCO™
- STIHL RAPID™

ANY UNAUTHORIZED USE OF THESE TRADEMARKS WITHOUT THE EXPRESS WRITTEN CONSENT OF ANDREAS STIHL AG & CO. KG IS STRICTLY PROHIBITED.

STIHL INCORPORATED

536 Viking Drive
Virginia Beach, VA 23452
USA

www.STIHLusa.com

CONTACT STIHL

STIHL Customer Service is open Monday through Friday, 8 A.M. - 8 P.M. EST.

T: 1-800-467-8445

Or visit the "Contact Us" section on www.STIHLusa.com



“THIS IS ONE
TOUGH CHAIN SAW.
EASY TO USE,
AND TOUGH
AS NAILS.”



— **GEO8** MS 291 STIHL FARM BOSS® CHAIN SAW
Check out this review and others on the product pages at STIHLusa.com.

STIHL

STIHLUSA.COM



/stihlusa

0461.005.0000.M9.608.K23.RLC ©2023 STIHL Incorporated