

STANLEY
Security Solutions

SERVICE EQUIPMENT



D SERIES

SERVICE EQUIPMENT



TABLE OF CONTENTS

COMBINATING SERVICE EQUIPMENT	Page	CYLINDRICAL/TUBULAR	Page
CD431/5ED250 Combining Kit	2	83KA2A Mortise-to Cylindrical Adaptor Kits	8
AD433 Key Combinator	2	83KA2B Mortise/Cyl.-to Cylindrical Adaptor Kits	8
AD502(D) Digital Calibration Gauge	2	KD315 Face Plate Marking Chisel	8
AD434 Standard Key Carriages	2	KD325 Strike Plate Locating Pin	8
AD501 Key Cut Indicator	2	KD303 Through-Bolt Drill Jig	9
CD517 Core Capping/Decapping Press	3	KD304A Boring Jig Kits	9
CD549 Combining Tweezer	3	KD352 Adaptation Cut-off fixture	9
CD540 Best Core Capping Block	3	5E CYLINDER SERVICE EQUIPMENT	
CD548 Ejector Pin	3	5ED250 Combining Kit only	10
CD547 Hand Capping Pin	3	5ED261 Capping Block	10
DD513 Core and Key Marking Block	4	5ED253 Thread Tap	10
CD535 Graphite Gun	4	MORTISE AND RIM CYLINDER	
CD433 Combining Parts Bin	4	ED211 Mortise Cylinder Wrench	10
AD504A Key Marking Plate	5	ED212 Mortise Cylinder Cam Assembly Tool	10
DD502/DD503 Letter and Number Dies	5	PADLOCK SERVICE EQUIPMENT	
QU-I.C-System Combining Tool Packages	6	BD654 Padlock Disassembly Tool	11
QU-I.C-System Combining Tool Descriptions	7	BD642 Padlock Shackle Plug Assembly Kit	11

COMBINATING SERVICE EQUIPMENT**CD431/5ED250 Combining Kit**

This small desk-drawer size kit contains everything necessary to combine a BEST® core. It includes a complete selection of pin segments, springs, caps, a capping block, two capping pins, an ejector pin, tweezers, two standard keys and a key gauge. When securely closed, the kit may be carried in any position without mixing contents. Kits can be ordered separately or combined (1C core) & (5E cylinder).

To order 1C kit only:

CD431-2 (A2 system)
CD431-3 (A3 system)
CD431-4 (A4 system)

To order 1C & 5E combined kit:

CD431-25E (A2 system)
CD431-35E (A3 system)
CD431-45E (A4 system)

Pin segments (included in kit) Close tolerance segments assist in accurate combining. For order information, contact your local Stanley office.

Core springs (included in kit) This properly sized spring facilitates consistent action in all Best figure 8 cores. **To order specify:** 22S springs.

Core caps (included in kit) Barrels are securely sealed by applied core caps. **To order specify:** 21C caps.



CD431

AD433 Key Combinator

The key combinator is used to cut new or additional keys when required. BEST® combinations are cut in accordance with the original masterkeyed code with no reliance on a pattern key. As a result, inaccurate tolerances are not introduced into and compounded within the system as second, third and fourth generation keys are cut. Note: Key combinator is available for standard, premium, or Peaks systems.

To order specify:

AD433-2 (A2 system); AD433-3 (A3 system); AD433-4 (A4 system);
AD433P (Premium); AD436 (Peaks 6-pin); AD437 (Peaks 6-pin).



Spanner Wrench



AD433

AD434 Key Carriages

Additional key carriages for the AD433 key combinator allow you the flexibility to change from one keyway style to another. Changing carriages is simplified by the modular design of the combinator and chassis. Note: The AD502(D) Calibration Gauge must be used when changing carriages to verify the accuracy of key cuts. (Please refer to the key combinator service manual for detailed instructions).

To order specify: AD434 Carriage; AD434P Carriage for premium keyways

(Available only to registered Best Master Keyed System owners.)



S E R V I C E E

AD501 Key Cut Indicator (included in kit)

The key cut indicator makes it possible to immediately determine the proper cut of Best keys. (For accurate test, use AD502(D) Digital Calibration gauge; see below.) Key cut indicator is heavy steel, 2 ¹³/₁₆" x 1 ¹/₄".

To order specify:

AD501-2 (for A2 system)

AD501-3 (for A3 system)

AD501-4 (for A4 system)



AD501

AD502(D) Digital Calibration Gauge

The new combinator calibration gauge (Manual or (D) Digital) is designed to be used with the AD433 and AD433P keycombinators. It can be used for normal combinator inspection and adjustments, or for calibrating the combinator after changing carriages. Each gauge comes complete with detailed instructions for use.

To order specify: AD502 Manual; AD502(D) Digital



AD502(D) Digital Calibration Gauge

CD517 Core Capping/ Decapping Press (Heavy Duty)

In one smooth operation, this press seals all barrels of either a 6 or 7 pin combined core. The cap seating depth is adjustable. This very rugged tool bolts to the bench and lasts indefinitely.

To order specify: CD517 core capping press.



CD517

Keyway Blockout Kit

A blockout blade may be inserted into any BEST system to prevent insertion of an operating or control key. Provides quick, efficient lockout. Available for Standard, Premium and Kaba® Peaks® cores.

(Contact your local Stanley office for information).

CD540 Best Core Capping Block (included in kit)

The barrels of the core are in alignment with corresponding barrels in the capping block, and meter the "set" of the cap when the hand capping pin is employed.

Size 1 ¹/₄" x 1 ¹/₄" x 2".

To order specify: CD540 core capping block.



CD540

CD547 Hand Capping Pin (included in kit)

With the core held securely in the capping block, the hand capping pin may be used to seat the cap and thus seal the segments into each barrel of the Best core.

To order specify: CD547 hand capping pin.



CD547

CD548 Ejector Pin (included in kit)

The ejector pin of this handy tool may be inserted into the ejector pin hole, located at the bottom of each barrel opposite the cap of every BEST core, to eject the pins, spring and cap from the barrel preparatory to recombining.

To order specify: CD548 ejector pin.



CD548

CD549 Combining Tweezer (included in kit)

Combining tweezers are available to assist in handling the small caps, springs and pins used in combining Best cores.

To order specify: CD549 combining tweezers.



CD549

(Available only to registered Best Master Keyed System owners.)

COMBINATING SERVICE EQUIPMENT

DD513 Core and Key Marking Block

This steel tool securely holds any Best core and/or key for accurate stamping with letter and number dies. Size is 1" x 1 1/4" x 2 1/4".
 Note: Marking the face of Peaks® cores can damage the face, resulting in faulty operation.

To order specify:
 DD513 marking block.



DD513

DD514 Core and Key Marking Plate

This plate can hold 5 cores for end-marking, 5 cores for side-marking and 10 keys for bow-marking at one time. It speeds the marking process and helps avoid error in sequential numbering and lettering. A heavy casting 8" x 6" x 7/4".
 Note: Marking the face of Peaks® cores can damage the face, resulting in faulty operation.

To order specify:
 DD514 marking plate
 CD504B stamping plate face only (87 cores)
 CD504C stamping plate side only (50 cores)
 DD514A magnetic strip



DD514

CD535 Graphite Gun

Flaked graphite provides penetrating lubrication to all working lock parts and remains dry throughout lock life. Degrease and clean previously lubricated locksets before applying graphite

To order specify:
 CD535 Graphite
 CD535A One-pound (refill) graphite



CD535

CD433 Combining Parts Bin

These convenient bin racks are available for all size Best systems. All bin racks are free standing and made for use on any desk or table top. Bins are designed for quick, easy access to pin segments and parts; yet, lessen the possibility of accidental intermixing of pin segments when segment is dropped. Extra bins may be used for storage of pins and caps.

To order specify:
 CD433



CD433

(Available only to registered Best Master Keyed System owners.)



AD504A Key Marking Plate

This popular key marking plate makes bow marking large amounts of keys even easier by allowing 55 keys to be placed at one time. Both standard and patented keys can be used with this plate. This size is 13" x 12" x 1/2".

To order specify:
AD504A



AD504A

DD502 Letter and DD503 Number Dies

Durable high carbon steel number and letter dies for marking Best cores and keys are available in 1/16" or 3/32" letter heights.

To order specify:
DD502 letter dies or DD503 number dies and add the height of letter required.
Example: DD502 letter dies x 3/32".



DD502

DD503

DD537 Best/LPS Spray Lubricant

Factory tested and approved greaseless lubricant leaves a thin continuous lubrication film. Can be used with locks, even where other lubricants have been applied. Conforms to ANSI 156.6 cycle tested standards.

To order specify:
DD537 Best/LPS lubricant



DD537

(Available only to registered Best Master Keyed System owners.)

QU-I.C-SYSTEM COMBINATING TOOL PACKAGES

Dedicated Packages – These QU-I.C-KEYS are permanently factory built specifically for just one key system. GM and Control codes required. Intended for long-term use by Institutional Locksmiths who continuously work with the same key system(s).

BQDP – Basic QU-I.C-KEY Dedicated Package

Includes the 7 main system tools



Dedicated QU-I.C-KEY and Viewing Base



QU-I.C-LOAD Tool



QU-I.C-TEST Tool



QU-I.C-CHEX Tool



QU-I.C-Tweez-jector



QU-I.C-Preamer

PQDP – Professional QU-I.C-KEY Dedicated Package

*Includes the 7 main system tools
BQDP Package (shown above)*



QU-I.C-TEST Adapter



QU-I.C-Power Preamer



CKT-12 Core & Key Tray

EQDP – Expert QU-I.C-KEY Dedicated Package

*Includes the 10 tools in the
PQDP Package (shown above)*



QU-I.C-BLOCK Tool



CKT-60 Core & Key Tray

To order specify: UL–BQDP, PQDP or EQDP / A2, A3 or A4 / 6 or 7-pin / GM and CONTROL Codes

Universal Packages – You get to custom build a QU-I.C-KEY for any A2 key system that you are working with. These kits are better suited for temporary use and re-use – not for long-term / continuous key system use. (A4 System Kits are available).

BQUP – Basic QU-I.C-KEY Universal Package

Includes the 8 main system tools



Universal QU-I.C-KEY Kit and Viewing Base



QU-I.C-LOAD Tool



QU-I.C-TEST Tool



QU-I.C-CHEX Tool



QU-I.C-Tweez-jector



QU-I.C-Preamer

PQUP – Professional QU-I.C-KEY Universal Package

*Includes the 8 main system tools
BQUP Package (shown above)*



QU-I.C-TEST Adapter



QU-I.C-Power Preamer



CKT-12 Core & Key Tray

EQUP – Expert QU-I.C-KEY Universal Package

*Includes the 11 tools in the
PQUP Package (shown above)*



QU-I.C-BLOCK Tool



CKT-60 Core & Key Tray

To order specify: UL–BQUP, PQUP or EQUP / A2 or A4 / 6 or 7-pin

(Available only to registered Best Master Keyed System owners.)

QU-I.C-SYSTEM COMBINATING TOOL DESCRIPTIONS

Dedicated QU-I.C-KEY and Viewing Base (QKD / A2, A3 or A4 / 6 or 7-pin / GM and CTL)

This unique tool is permanently built to provide every pin segment calculation for your specific master key system (GM and Control). Every calculation is clearly displayed and incorporates an innovative color-coded system. No math skills are required; no pen and paper are necessary; no slide charts; no computer programs; and no power needed (except for a twist of your wrist). Available in A2, A3 or A4, 6 or 7-pin.



Dedicated QU-I.C-KEY and Viewing Base

Universal QU-I.C-KEY Kit and Viewing Base (QKU / A2 or A4)

This kit allows you to custom build a QU-I.C-KEY for any A2 system that you are working on (kits also available for A4 systems). It will provide every pin segment calculation for the system you select. Every calculation is clearly displayed and incorporates an innovative color-coded system. No math skills are required; no pen and paper are necessary; no slide charts; no computer programs; and no power needed (except for a twist of your wrist). The special system strips in this kit are intended to be stored after use and re-used repeatedly.



Universal QU-I.C-KEY Kit and Viewing Base

QU-I.C-LOAD Tool * (QLT / 6 or 7-pin)

This tool holds the core during combining and provides color-coded, visual chamber identifiers that match the QU-I.C-KEY pin segment calculator. This provides constant orientation, greatly reduces errors and speeds production.



QU-I.C-LOAD Tool

QU-I.C-TEST Tool * (QTT)

This revolutionary tool is used with the QU-I.C-LOAD Tool and allows you to test combined cores before you cap them. It applies temporary spring pressure to all chambers so you can test every key. If a mistake has been made, you can correct the error while it is easy to do, without having to punch out and waste any pins, caps or springs. If all the keys work properly, you can then permanently cap the core with complete confidence.

NOTE: This tool must be used with the QU-I.C-LOAD Tool or QU-I.C-TEST Adapter!



QU-I.C-TEST Tool

QU-I.C-CHEX Tool * (QCT)

This tool allows you to eject the pins into the clear viewing tube to visually inspect the pin segments of any chamber for accuracy without worrying about "balancing" the pin stack. It is easy to safely return the pin stack to the core. Also useful for transporting pin stacks.



QU-I.C-CHEX Tool

QU-I.C-Tweez-jector (QTJ)

2-in-1 tool that combines a full size, custom tip tweezer with an ejector pin that can tamp down or eject pin segments. A real time saver - no need for a separate ejector pin.



QU-I.C-Tweez-jector

QU-I.C-Preamer (QPT)

This tool allows you to pre-ream the top of core chambers. This removes any burrs and creates a slight funnel-like effect so that #4 top pin segments can drop more easily into the core. A protective cap is supplied and the other end of the tool contains an ejector pin.



QU-I.C-Preamer

QU-I.C-Power Preamer (QPP)

This tool attaches to any hand held power screwdriver and allows you to pre-ream the top of the core chambers faster. This is beneficial when doing large combining projects.



QU-I.C-Power Preamer

QU-I.C-TEST Adapter (QTA)

This is an accessory for the QU-I.C-TEST Tool and can be attached and removed as required. It enables testing of cores without having to load them into the QU-I.C-LOAD Tool.



QU-I.C-TEST Adapter

QU-I.C-BLOCK Tool * (QBT)

You can eject the pins from a 6 or 7-pin core in a controlled manner allowing you to decode cores from existing systems when no documentation is available. Punch-out tool is included.



QU-I.C-BLOCK Tool

Core & Key Tray (CKT-12)

Provides 12 positions for cores or keys. It safely holds and transports combined cores until they can be capped. Works with 6 and 7-pin BEST style or PEAKS® interchangeable cores.



CKT-12 Core & Key Tray

Core & Key Tray (CKT-60)

Provides 60 positions for cores or keys for large combining projects. It safely holds and transports combined cores until they can be capped. Works with 6 and 7-pin BEST style interchangeable cores. Also accommodates PEAKS® I-Cores with extended front.



CKT-60 Core & Key Tray

* NOT compatible with special .140 spacing cores

To order specify: UL-part number (shown above) / other system information if required

(Available only to registered Best Master Keyed System owners.)

CYLINDRICAL/TUBULAR**83KA2A Mortise-to-Cylindrical Lock Adaptor Kits**

Mortise lock mounting may be converted to BEST® 6K and 8K cylindrical lock through use of this kit.

Specifications

Materials– Stainless steel

Finish– 630 Only.

Escutcheon– 3 1/2" x 8 1/2" x .050 thickness

Strike– 1 1/4" x 8" with 6 3/4" lip, 1 1/4" to center

Face plate: 83KF1– 8" x 1 1/8" wide

Backset– 2 3/4" (Fed spec. 161)

Door thickness is increased 7/64" for mounting either 6K or 8K series locksets.

To order an adaptor kit specify:

83KA2A adaptor kit



83KA2A

One-Piece Universal Mortise/Cylindrical-to-Cylindrical Adaptor Kits

Doors previously mounted with another manufacturer's lockset may be quickly adapted to a Best cylindrical 6K and 8K lock through use of one of the following kits.

Specifications

Materials– Stainless steel

Finish– 630 only

Face plate recess– 2 1/4" x 1 1/8"

Backset– 2 3/4" x 1 1/8" (Fed. Spec. 161)

Door thickness– 1 3/4"

To order specify:

Kit number and door thickness.

Example: 83KA2B x 1 3/4"



83KA2B

**KD312 and KD315 Face Plate Marking Chisel
KD325 Strike Plate Location Pin**

The KD315 face plate marking chisel (which locates the mortising for the face plate) and the KD325 strike locating pin (which centers the strike for proper installation) is used for Fed. Spec. 161 cylindrical lockset, (1 1/8" x 2 1/4"), and BEST® series 82T & 83T tubular locks. The KD312 face plate marking chisel is available for Fed. Spec. 160 (1" x 2 1/4") preparation.

To order specify:

KD312 face plate marking chisel (160)

KD315 face plate marking chisel (161)

KD325 strike plate locating pin

KD315
(Fed. Spec. 161)

KD325

(Available only to registered Best Master Keyed System owners.)

KD303 Through Bolt Drill Jig

Special accessory jig aids in aligning $\frac{5}{16}$ " holes for through bolt mounting of 9K cylindrical locks. Simply install latch first, then insert jig in $2\frac{1}{8}$ " bored hole, align with door edge and drill with $\frac{5}{16}$ " bit.

To order specify: KD303



KD303

KD304A Boring Jig Kits

The KD304A jig kit is made for boring cut outs in wooden doors for Fed. Spec. 160 and 161 series cylindrical/tubular locksets, doors $1\frac{3}{8}$ " to $2\frac{1}{4}$ " thick. The KD304A kit includes the boring jig (to drill wood doors for $2\frac{3}{8}$ ", $2\frac{3}{4}$ ", $3\frac{3}{4}$ ", and 5" backsets), adaptor for $\frac{3}{8}$ " drill chuck,

KD309 $2\frac{1}{8}$ " bit, KD318 1" dia. x 9" bit,
KD312 face plate marking chisel 1",
KD315 face plate marking chisel $1\frac{1}{8}$ ", and the
KD325 strike plate locating pin.

To order complete kits specify: KD304A Kit

All of the individual kit parts listed above may be ordered separately except for the adaptor chuck and jig.



KD304A

Adaptation Cutoff Fixture

To assist in adapting cylindrical locksets made by other manufacturer's to BEST's knobs and master keyed cores, adaptation cutoff fixtures are available.

For more information visit us at www.stanleysecuritysolutions.com.



KD352 Cut-Off Fixture

(Available only to registered Best Master Keyed System owners.)

5E CYLINDER SERVICE EQUIPMENT**Service Equipment for 5E Cylinders (Single Shearline)**

Best single shearline locks may be combined to GrandMaster, Master and/or any operating combinations in your Best system. Utilizes the AD433 KEY COMBINATOR. (See page 2 for ordering details.)

5ED250 Combining Kit (Single Shearline)

Similar to standard CD431 kit for figure 8 cores (see page 2), the single shearline kit provides a special 5ED261 capping block, springs (5ES1) and caps (5ECP).

To order specify:

5ED250 – 2 (for A2 system)

5ED250 – 3 (for A3 system)

5ED250 – 4 (for A4 system)

5ED261 Slide Capping Block

The capping process for single shearline 5E cylinders requires the following:

Slide Caps (5E):

5ECP6– 6Pin

5ECP7– 7 Pin

For 5E Cylinder:

5ED261 Capping Block

5ED262 Cap Depressor



5ED261

5ED253 Thread Tap

Matches standard 24 thread on 5E series cylinder locks.

To order specify: 5ED253 thread tap



5ED253

MORTISE AND RIM CYLINDER**ED211 Mortise Cylinder Wrench**

The Best mortise cylinder wrench and test handle is an essential double-purpose tool. It is used primarily to install or remove Best mortise cylinders without marring the cylinder surface finish. It is also used to align throw pins, and as a testing tool when installing mortise or tubular units. The single end may be used to test the lock operation.

To order specify:

ED211 mortise cylinder wrench.



ED211

ED212 Mortise Cylinder Cam Assembly Tool

Fast attachment of cams to Best mortise cylinders is effected with this important device. It works equally well with adaptation cams, permitting relocking of any masterkeyed mortise lockset through use of BEST® replacement cylinders. Approximate length 1 3/4".

To order specify:

ED212 mortise tool.



ED212

ED221 Mortise Cylinder Thread Repair Die

Tool for re-threading 1 5/32" diameter cylinder.

To order specify: ED221 thread repair die 1E cylinder.

ED222 Cylinder Cam Testing Tool

Engages throw pins and activates cam for testing.

To order specify: ED222 cylinder cam testing tool.

3ED224 Hole Tap for 1 1/2" Mortise Cylinder

Tap tool is used to re-thread housing threads for 3E mortise cylinders.

To order specify: 3ED224 hole tap for 1 1/2" mortise cylinder.

ED225 Hole Tap for 1 5/32" Mortise Cylinder

Tap tool used to re-thread housing threads for 1E mortise cylinder.

To order specify: ED225 hole tap for 1 5/32" mortise cylinder.

(Available only to registered Best Master Keyed System owners.)

F3 – Frangible Shackle Replacement Available for 11B720

The frangible shackle padlock is designed for fire and safety equipment cabinets, etc., where casual entry is to be prevented. For more information on the 11B frangible shackle please refer to the B Series Padlock catalog section.

Broken shackles are easily replaced on-site and may be ordered separately. A complete extra frangible shackle kit (including three extra frangible shackles, three extra shackle springs and a disassembly tool) may be ordered by adding suffix "K" to the catalog number.

Frangible shackles are available in bronze material only.

To order specify:

Example: 11B20FK (kit only)

To order shackle only: add suffix FF and omit pin size.

Example: 11B20FF (frangible shackle only)



11B20FF

BD640 Padlock Shackle Plug Assembly Kit

Items included in this kit are essential to the repair of 11B, 21B, 41B padlocks in the field.

To order complete kit specify:

BD640 assembly kit.

Individual items may be specified as follows:

BD641 – Padlock parts tweezer 6"

BD642 – Shackle plug installation tool and hammer


BD643 – Padlock holding plate

Concerning Proper Installation

Installation instructions for any BEST® product should be carefully followed for proper operation of the installed unit. If improperly installed, malfunction of the unit may result.



BD654

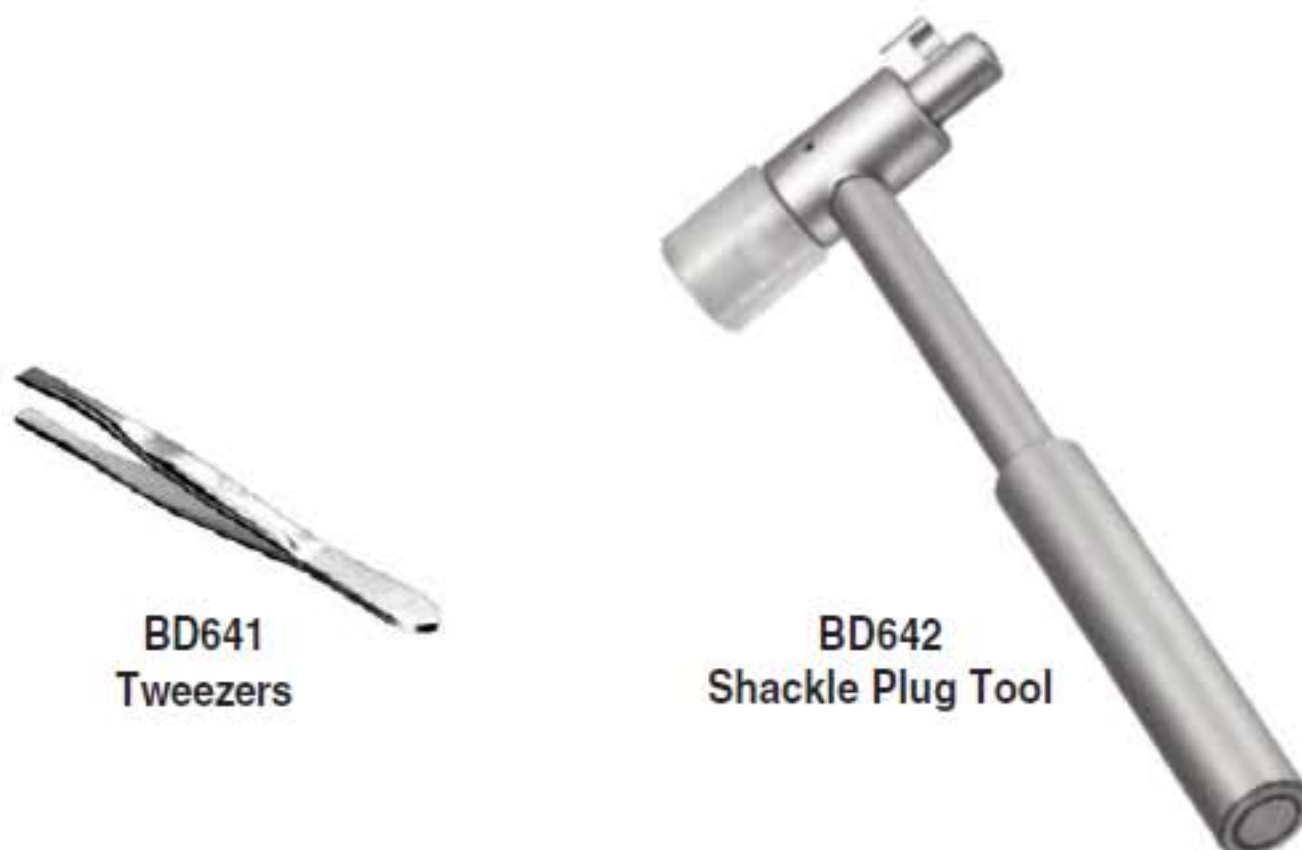

BD641
Tweezers

BD642
Shackle Plug Tool

BD643
Holding Plate

(Available only to registered Best Master Keyed System owners.)



For more information on Stanley Security Solutions' products, services, and office locations visit our web site at www.stanleysecuritysolutions.com

Product information contained in this catalog has been compiled and presented with as much care and completeness as is reasonably possible. Errors or mistakes may be present, and in many cases, reliance has been placed on information supplied by other manufacturers which may be in error or which may be subject to changes or modifications by the manufacturer without notice and without obligation. Therefore, no guarantee can be made or should be assumed or implied with regards to product information contained in this catalog.



Stanley Security Solutions, Inc.

6161 E. 75th Street Indianapolis, Indiana 46250

www.stanleysecuritysolutions.com

© 2009 Stanley Security Solutions, Inc. and Stanley Logistics

10M R809
BAS033