


COMPX TIMBERLINE REMOVABLE

LOCK PLUG SYSTEM

- Wide Selection of Locks to Fit Most Furniture & Cabinet Applications
- Available in Several High Quality Finishes
- Removable Lock Plugs For Complete Keying Versatility
- · Pre-Packaged in Poly-bags for Easy Distribution to Your Customer




Lock Plug + Cylinder Body = Assembled Lock



All Timberline locks consist of two separate components: a Lock Plug, and a Cylinder Body. A Change Tool (D500KY, see page 7) is required to remove lock plugs from the cylinder bodies.

Most Timberline locks are designed for mounting in 3/4" panels, with or without a veneer or laminate face.



Most Timberline locks are used in a 16.5 mm hole (drill bit C165DB available, see page 7). Optional bezels are available (see page 7) that allow use of locks in holes from 3/4" to 7/8" in diameter.

LOCK PLUGS FOR ALL LOCK TYPES



Part No.	Finish	KA Codes*	KD Codes**	Case Quantity	Key Blank
C100LP-14A	Polished Nickel	10	25	25	D300KY
C200LP-8	Old English	10	25	25	D300KY
C300LP-19	Black	10	25	25	D300KY
C400LP-20	Statuary Bronze	10	25	25	D300KY
C500LP-3	Polished Brass	10	25	25	D300KY
C700LP-15	Satin Nickel	10	25	25	D300KY

- Key Codes Available: 100T, 101T, 102T, 103T, 104T, 105T, 106T, 107T, 108T, 109T
- Packaged Kit of 25 Lock Plugs, One Each Keyed with Codes 110T through 134T

Lock Features:

- Small Diameter
- High Quality/Long Life
- Solid Brass Keys
- Coded on Face & Keys
- Master-Keyed Standard
- Removable Lock Plug

Lock Plug Finishes:



Polished

Nickel



Old

English



Black







Statuary Bronze

Polished Brass

Satin Nickel



DOOR LOCKS





240 SERIES

290 SERIES

Application - Surface mounted lock for locking doors.

Operation - 180° key rotation, CCW to lock, key removable in both locked and unlocked

Keying - Order lock plug separately, see page 2.

Packaging - Housing is black, toughened nylon. Cylinder is unplated. Cams are zinc plated. Case quantity 25.

Part No.	Туре	Cam Setback	Cam Extension*	Cam Throw	Case Quantity
C240CB	240	3/32"	15/16"	1/2"	25
C241CB	241	3/32"	1-3/8"	1/2"	25
C242CB	242	3/32"	2-5/8"	1/2"	25
C244CB	244	19/32"	1-1/2"	1/2"	25
C245CB	245	7/8"	1-1/2"	1/2"	25
C290CB	290	9/32"	13/16"	3/8"	25
C291CB	291	9/32"	1-1/4"	3/8"	25

^{*} Measured from center of cylinder to tip of cam in unlocked position

DRAWER LOCKS





280 SERIES

230 SERIES

Application - Surface mounted lock for locking drawers.

Operation - 180° key rotation, CCW to lock, key removable in both locked and unlocked

Keying - Order lock plug separately, see page 2.

Packaging - Cylinder is black, toughened nylon. Cylinder is unplated. Cams are zinc plated. Case quantity 25.

Part No.	Туре	Cam Setback	Cam Extension*	Cam Throw	Case Quantity
C230CB	230	3/32"	15/16"	1/2"	25
C231CB	231	3/32"	1-3/8"	1/2"	25
C232CB	232	3/32"	2-5/8"	1/2"	25
C234CB	234	19/32"	1-1/2"	1/2"	25
C235CB	235	7/8"	1-1/2"	1/2"	25
C280CB	280	9/32"	13/16"	3/8"	25
C281CB	281	9/32"	1-1/4"	3/8"	25

^{*} Measured from center of cylinder to tip of cam in unlocked position

GLASS DOOR LOCKS



Application - Swing style doors.

Operation - 90° rotation. CCW to lock. Requires 7/8" Dia. hole bored in glass centered 7/8" from edge.

G	Glass Door Lock Bore Through Style Mounts In Glass Doors Up To 3/8" Thick							
	Part No.	Finish	Version	Cam Setback	Case Quantity			
ck.	C301CB-14A	Polished Nickel	Horizontal Mount	15/16"	10			
SS	C307CB-15	Satin Nickel	Horizontal Mount	15/16'	10			
	C311CB-14A	Polished Nickel	Vertical Mount	15/16"	10			
	C315CB-3	Polished Brass	Vertical Mount	15/16"	10			
	C317CB-15	Satin Nickel	Vertical Mount	15/16"	10			

Glass Door Lock Compression Mount Style Mounts On Glass Door 1/4" - 5/16" Thick







Keying - Order lock plug separately, see page 2.

Application - Swing style doors

Operation - 180° rotation. Lock slips onto edge of glass door at any location. Works with C185SP-19 strike plate.


	Part No.	Finish	Version	Cam Throw	Case Quantity
s	C351CB-14A	Polished Nickel	Horizontal Mount	1/2"	10
۱. ا	C355CB-3	Polished Brass	Horizontal Mount	1/2"	10
	C357CB-15	Satin Nickel	Horizontal Mount	1/2"	10
	C361CB-14A	Polished Nickel	Vertical Mount	1/2"	10
	C365CB-3	Polished Brass	Vertical Mount	1/2"	10
	C367CB-15	Satin Nickel	Vertical Mount	1/2"	10

Glass Door Lock Double Door Style Mounts On Glass Door 1/4" - 5/16" Thick

Application - Double swing style doors. **Operation** - 180° rotation. Lock slips onto edge of glass door. Tab provides stop for opposing door. Works with C185SP-19 Strike Plate.

	Part No.	Finish	Version	Cam Throw	Case Quantity
3	C371CB-14A	Polished Nickel	Vertical Mount	1/2"	10
3	C375CB-3	Polished Brass	Vertical Mount	1/2"	10
'	C377CB-15	Satin Nickel	Vertical Mount	1/2"	10

CAM LOCK KITS C165CB, C168CB, C169CB



Application - Universal type lock for either doors or drawers. Each kit contains a variety of easily switched cams to accommodate most locking

Operation - 90° & 180° cam rotation. CCW to lock.

Keying - Order lock plug separately, see page 2.

Packaging - Cylinder supplied with two straight and bent cams. Bent cams have setback of 15/32". Cylinder is unplated. Case quantity 25.

These Kits will Replace the Following Timberline Cam Locks:

C165CB 90° Rotat	ion		C168CB 180° Rota (Horizon		C169CB 180° Rot (Vertical)	
CB-080 CB-085 CB-090 CB-095	CB-083 CB-087 CB-093 CB-097	CB-084 CB-088 CB-094 CB-098	CB-184	CB-183 CB-185 CB-188	CB-194	CB-193 CB-195 CB-198

TWO DRAWER SIDE GANG LOCK D270CB



Application - Two drawer gang lock for locking two pedestal drawers with a single lock. Lock mounts on side of cabinet.

Operation - 180° key rotation, CCW to lock, key removable in both locked and unlocked


Keying - Order lock plug separately, see page 2.


Packaging - Housing supplied with two C500DC-19 Drawer Clips. Case quantity 25.




GANG LOCKS

FRONT MOUNT SYSTEM 100

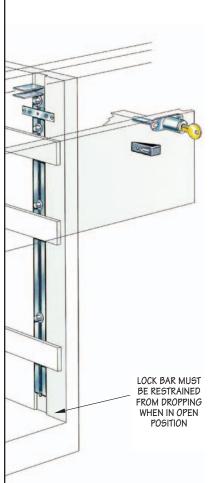

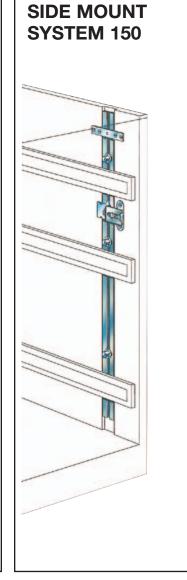

Part No.	Description	Case Quantity
D100KIT	Front Gang Lock Kit - Includes D100CB (1), D100LC (1), D240LB-24 (1), D037AP (4), C500DC-19 (4), D100LR (2)	25
D150KIT	Side Gang Lock Kit - Includes D150CB (1), D150LC (1), D240LB-24 (1), D037AP (4), C500DC-19 (4), D100LR (2)	25
D100CB	Front Gang Lock	25
D101CB	Front Gang Lock w/Single Mounting Ear	25
D100LC	Type 100 Lockbar Clip	25
D104LC	Extended Lockbar Clip -Right Hand	25
D114LC	Extended Lockbar Clip -Left Hand	25
D150CB	Side Gang Lock	25
D150LC	Type 150 Lockbar Clip	25
D120LB-18	Lockbar - 18"	5
D240LB-24	Lockbar - 24"	5
D037AP	3/8" Adjustable Pin	Packaged
D087AP	7/8" Adjustable Pin	in bags
D100LR	Lockbar Retainer	of 25
Note: Order le	ock plug separately, see page 2	

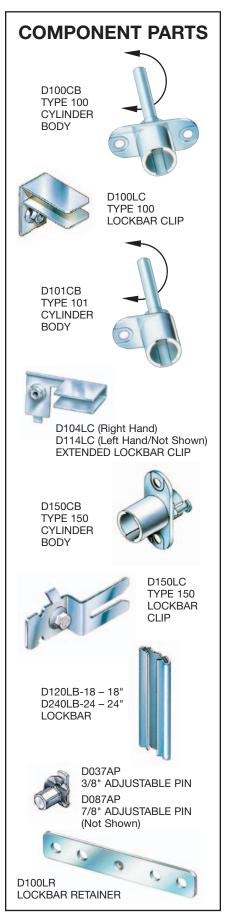

DOUBLE DOOR LOCKS C1005P-19 C250CB **TYPE 250** STRIKE PLATE CYLINDER BODY C2575P-19 STRIKE PLATE LOCKS BOTH DOORS WITHOUT THE USE OF A SPRING CATCH

Application - Surface mounted lock for locking two adjacent doors. Eliminates the need for a spring catch on the door opposite the lock. Works with either overlay or inset doors.

Operation - 180° cam rotation, CCW to lock, key removable in both locked and unlocked positions.

Keying - Order lock plug separately, see page 2.

Packaging - Supplied with two strike plates as shown. Housing is black, toughened nylon. Cylinder is unplated. Cams are zinc plated. Case quantity 25.

Part No.	Orientation		Top Cam Extension*				Case Quantity
C250CB	Normal (as shown)	3/16"	29/32"	3/32"	29/32"	1/2"	25
C251CB	Normal (as shown)	11/16"	1-17/32"	3/32"	29/32"	1/2"	25
C255CB	Opposite Mount	3/16"	29/32"	3/32"	29/32"	1/2"	25
C256CB	Opposite Mount	11/16"	1-17/32"	3/32"	29/32"	1/2"	25

^{*} Measured from center of cylinder to tip of cam in unlocked position


PUSH LOCK C175CB

Application - For locking sliding, bypass type doors. Requires 3/4'' hole in front door for cylinder.

Operation - Pushing in cylinder locks doors, with or without key. 45° key rotation allows cylinder to pop back out to unlock doors. Key removable in both locked and unlocked positions.

Keying - Order lock plug separately, see page 2.

Packaging - Supplied with nickel plated finish cup as shown. Housing is black, toughened nylon. Case quantity 25.




THICK PANEL LOCK C170CB

Application - Universal type lock for either doors or drawers that can accommodate panel thickness from 7/8" to 1-3/8" thick.

Operation - 90° cam rotation, CCW to lock.

Keying - Order lock plug separately, see page 2.

Packaging - Housing supplied with straight cam and bent cam. Housings are unplated. Cams are zinc plated. Case quantity 25.

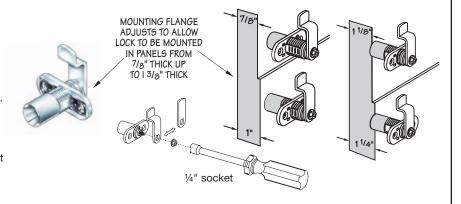

FLIPPER/TAMBOUR DOOR LOCKS

Application - Cam lock with hooked cam for flipper or tambour doors.

Operation - 180° cam rotation, CCW to lock, key removable in both locked and unlocked positions.

Keying - Order lock plug separately, see page 2.


Packaging - Supplied with C181SP-19 strike plate. Housings are unplated, cams are zinc plated. Case quantity 25.



C181CB TYPE 181 CYLINDER BODY HORIZONTAL MOUNT



C191CB TYPE 191 CYLINDER BODY VERTICAL MOUNT



MISCELLANEOUS COMPONENTS




Application – Universal type lock for either doors or drawers. Kit will accommodate most locking applications for material thickness 1/16" – 1/2".

Operation – 90 degree cam rotation CCW to lock.


Keying – Order lock plugs separately, see page 2.

Packaging – Cylinder supplied with one straight cam, two bent cams, flange nut, hex nut and spur washer. Cylinder is black, cam plates are zinc plated.

Case quantity 25

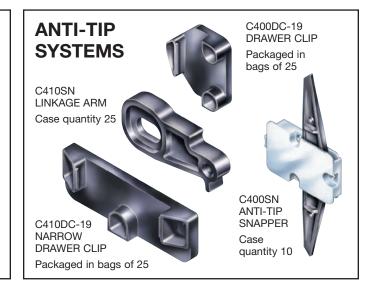

WARDROBE LOCKS



WARDROBE LOCK

VERTICAL MOUNT


C480WB-48 WARDROBE BAR 50"

Part No.	Description	Case Quantity
C260CB	Wardrobe Lock Vertical Mount	25
C265CB	Wardrobe Lock Horizontal Mount (Not Shown)	25
C480WB-50	Wardrobe Bar 50" Long	5
C260SP-19	Wardrobe Bar Support	Packaged in bags of 25

LATERAL FILE LOCKS

D200AC LATERAL FILE ACTUATOR Case quantity 10






CENTRAL LOCKS







D500CB CYLINDER BODY D550CB CYLINDER BODY WITH DEADBOLT (Not Shown)

Case quantity 25




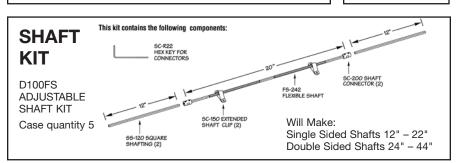





TOOLS & ACCESSORIES

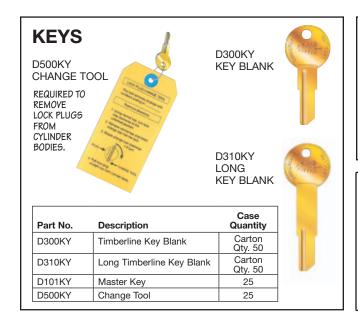






C100BZ-14A BEZEL NICKEL
C200BZ-8 BEZEL OLD ENGLISH
C300BZ-19 BEZEL BLACK
C400BZ-20 BEZEL STATUARY BRONZE

C400BZ-20 BEZEL STATUARY BR C500BZ-3 BEZEL BRASS C700BZ-15 BEZEL SATIN NICKEL

ALLOWS CYLINDER BODIES TO BE USED WITH 3/4" THROUGH 7/8" DIAMETER HOLES AND PERMITS USE OF LOCKS IN 7/8" THICK PANELS

Packaged in bags of 25.






FITS DRAWERS WITH INSIDE DEPTH LESS THAN 26"

FFSK2-LT FOR LETTER WIDTH FILES

FFSK3-LG FOR LEGAL WIDTH FILES






KITS SUPPLIED WITH THE COMPONENTS NEEDED TO OFFER FRONT TO BACK AND SIDE TO SIDE FILING D100SC SHAFT CLIP

Packaged in bags of 25





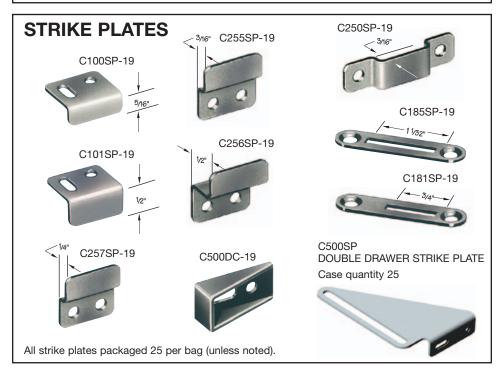

RE-KEYING KIT V72D-TL

Re-Keying Kit Replacement Parts

Order Part No.	Description	Qty./ Bag
CLW-R54	TL-454 Wafer Kit-A	100
CLW-R51	TL-451 Wafer Kit-B	100
CLW-R44	TL-444 Wafer Kit-C	100
CLW-R41	TL-441 Wafer Kit-D	100
CLW-R24	TL-424 Wafer Kit-E	100
CLW-R21	TL-421 Wafer Kit-F	100
CLW-R14	TL-414 Wafer Kit-G	100
CLW-R11	TL-411 Wafer Kit-H	100
CLK-R90	TL-4GD Guide	100
CLK-R31	TL-4SP Spring	100
CLP-P10	TL-4P1 Nickel Lock Plug	10
CLP-P20	TL-4P2 Old English Lock Plug	10
CLP-P30	TL-4P3 Black Lock Plug	10
CLP-P50	TL-4P5 Brass Lock Plug	10







MAIN OFFICE - FACTORY

PO Box 200 Mauldin, SC 29662 PH: 864-297-6655 FAX: 864-297-9987

compx.com

WESTERN DISTRIBUTION CENTER

9370 Buffalo Avenue, Unit 104 Rancho Cucamonga, CA 91730

PH: 909-476-7933 FAX: 909-476-8553

The products contained in this catalog are protected by the following patents: 5,678,437; 6,550,874; 1,331,036; 6,109,708.