Product Catalog



DL Series Tubular Lock



Copyright © 2004-2018, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved.

Table of Contents

DL Series Tubular Locks

Specifications, Functions & Options	3
Simplí™ Roseless Trim and RDL Series Locks	
Studio Collection Levers	5-7
Ordering Gramercy Series Levers	8
Coastal Series™ & Standard Levers	9
Roses & Finishes	.10
Strikes	.1
Architectural Specifications	.13





As part of their promise to provide innovative solutions to their customers, certain ASSA ABLOY Group brands offer the MicroShield® technology, a silver-based antimicrobial coating designed to inhibit the growth of bacteria. MicroShield® is a registered trademark of Yale Security Inc., an ASSA ABLOY Group company.

MicroShield® Coating

- Revolutionary finish coating available on all SARGENT product lines, utilizes a silver-based antimicrobial compound from Agion Technologies
- As an integral part of the finish coating, MicroShield lasts for the life of the hardware
- MicroShield coating permanently suppresses the growth of bacteria, algae, fungus, mold and mildew. It is effective against a broad spectrum of bacteria.
- Non-toxic and completely safe. The Agion antimicrobial compound is EPA and NSF approved and FDA listed for use in medical and food preparation equipment.
- Applications: Anywhere there is need for a clean environment (hospitals, laboratories, schools, medical centers, daycare, food processing etc.)

Specifications, Functions & Options

DL Series Tubular Locks





DL Series Tubular Lock

The DL Series tubular lock is designed for ease of installation with the quality you expect from the SARGENT name. The DL Series exceeds the expectations of the most demanding architects and design professionals. All Studio Collection and Coastal Series levers, as well as standard levers, can be used with the DL Ideal interior applications include hotel guest rooms, high-end apartments, and condominiums.

General Information

- For doors 1-3/8" (35mm) to 1-3/4" (44mm) thick standard
- 2-3/4" Backset standard with square corner front, 2-1/4" x 1-1/8" (specify 20- for 2-3/8" backset)
- ANSI Standard 161 Door Prep (Except 93 & 94)
- Latchbolt brass 1/2" (12.7mm) projection
- Specify hand of lock on order; easily field reversible
- Warranty: 1 Year

Note: Any retrofit or other field modification to a fire rated opening can potentially impact the fire rating of the opening, and Sargent Manufacturing Company makes no representations or warranties concerning what such impact may be in any specific situation. When retrofitting any portion of an existing fire rated opening, or specifying and installing a new fire-rated opening, please consult with a code specialist or local code official (Authority Having Jurisdiction) to ensure compliance with all applicable codes and ratings.

ASSA ABLO

Description	Series & Function	on
Both levers retract latchIdeal for closets & bedrooms	DLU15 Passage	
Blank rose outsideLever retracts latch	DLU15-3 Communicating	
 I/S lever always retracts latch O/S lever retracts latch, except when locked by inside push button Closing door unlocks outside lever Includes emergency release Ideal for bathrooms & home offices Not available with H008, H009, and H011 levers 	DLU65 Privacy	
 Lever always rigid No latch included Ideal for pantries & closets Surface Mounted* 	DLU93 Single Lever Pull	
Levers always rigidNo latch includedIdeal for sliding doors	DLU94 Double Lever Pull	

^{*} DLU93 Single Lever Pulls are recommended for use on solid wood or metal doors

Available Options

• Through-bolted

12	UL Listed for 3 hour Fire Rated doors
13	Lockset x Front & Strike with 1/4" Radius and 2-3/8" Backset
14	505 Full lip strike
20	2-3/8" backset latch with square corner front 2-1/4" x 1" front
28	Strike #808. Lip length 1-1/4"
31	1-7/8" to 2" thick door—only centered in door
SG	MicroShield® – an antimicrobial powder coat (Available on 15, 26D, and 32D Finishes only)
ТВ	Through-bolting for DLU93 Function
WBS	Wrought Box Strike

How to Order DL Series Tubular Locks:

DL	U15	TO	MM	26D
Series	Function	Rose	Lever	Finish

90102 06/1

Simpli™ Roseless Trim and RDL Locks

Information and Functions





Simplí™ Roseless Trim and RDL Tubular Locks

This elegant trim by SARGENT seamlessly unifies the lever and the door. Compatible with most Studio Collection and Coastal Series designer levers, Simplí™ creates a flawless aesthetic vision on any door opening.

Simpli is offered on the RDL Series tubular lock, which was specially designed to accept the roseless trim. In addition to the RDL Series, Simpli is also available with the R8200 Series mortise locks and Harmony R8200 Series mortise locks.

- RDL Series with Simpli trim is available with all DL functions
- Simpli™ roseless trim is available with Coastal Series and many Studio Collection levers (except MC, MK, MN, MP, MT, Gramercy Series, Wooster Square and Grant Park)
- Selected levers return within $\frac{1}{2}$ " of the door face
- Simpli roseless trim is not compatible with DL latches; can only be used with RDL locks

General	Intormation
---------	-------------

- For doors 1-3/4" (44mm) thick
- RDL is UL Listed for 3 hour Fire Rated doors
- 2-3/4" Backset standard with square corner front, 2-1/4" x 1-1/8" (specify 20- for 2-3/8" backset)
- Latchbolt brass 1/2" (12.7mm) projection
- Specify hand of lock on order; easily field reversible
- Warranty: 1 Year

Note: Special door prep templates required. This product is not compatible with 160/161 cylindrical lock preparations

Description

Series & Function

Both levers retract latch	RDLU15
Ideal for closets 8, hedrooms	Passage



• Blank rose outside

• Lever retracts latch

RDLU15-3
Communicating



• I/S lever always retracts latch

• O/S lever retracts latch, except when locked by inside push button

Closing door unlocks outside lever

• Includes emergency release

• Ideal for bathrooms & home offices

• Lever always rigid

No latch included

Ideal for pantries & closets

• Through-bolted

Levers always rigid

No latch includedIdeal for sliding doors

Through-bolted

RDLU93

RDLU65

Privacy

Single Lever Pull





RDLU94

Double Lever Pull





Available Options

1	For doors 1-3/8" (35mm) Thick
13	Lockset x Front & Strike with 1/4" Radius and 2-3/8" Backset
14	505 Full lip strike
20	2-3/8" backset latch with square corner front 2-1/4" x 1" front
28	Strike #808. Lip length 1-1/4"
SG	MicroShield® – an antimicrobial powder coat (Available on 15, 26D, and 32D Finishes only)
WBS	Wrought Box Strike

How to Order RDL Series Tubular Locks:

Series Function Rose Lever Finish
RDL U15 R MM 26D

Note: Roseless trim requires the use of RDL locks. Use the letter R for the Rose when specifying roseless trim.


SARGENT

ASSA ABLOY

Studio Collection Levers

DL & RDL Series Tubular Locks

Aventura Series Odéon Series (Handed Levers)

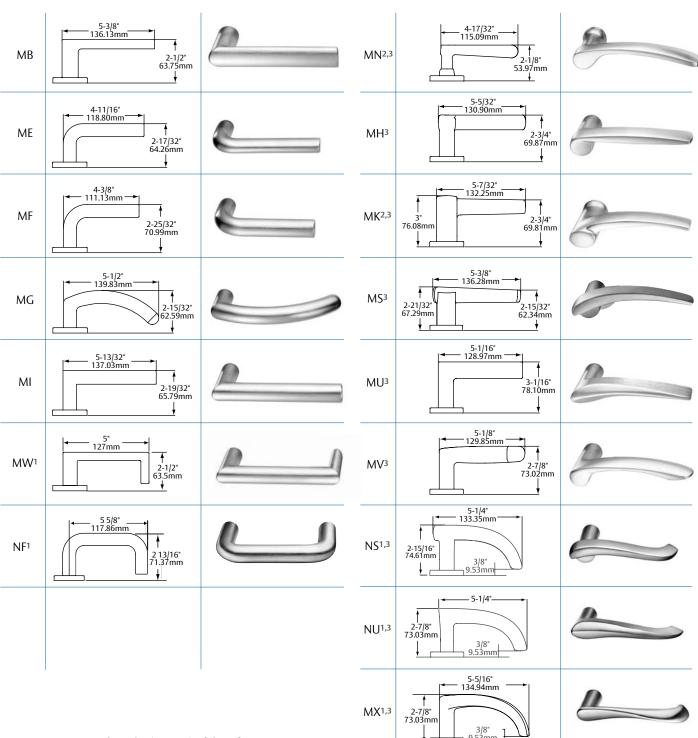

¹ Lever returns within 1/2" (13mm) of door face

90102 06/18

² Not available with Simpli[™] roseless trim


³ Not available in 32D or 32 finish

Studio Collection Levers

DL & RDL Series Tubular Locks


SARGENT ASSA ABLOY

Centro Series

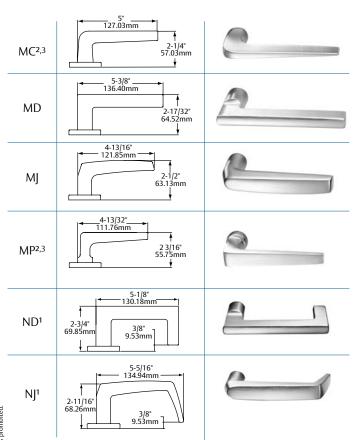


Notting Hill Series

(Handed Levers)

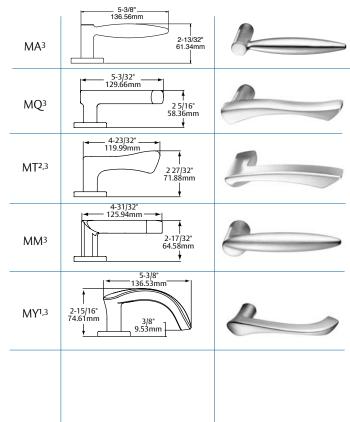

Rialto Series

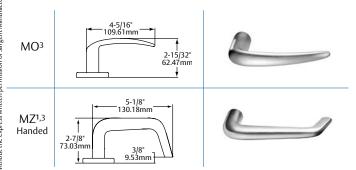

6

¹ Lever returns within 1/2" (13mm) of door face

² Not available with Simpli™ roseless trim


³ Not available in 32D or 32 finish

Copyright © 2004-2018, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

Studio Collection Levers


DL & RDL Series Tubular Locks

SARGENT ASSA ABLOY

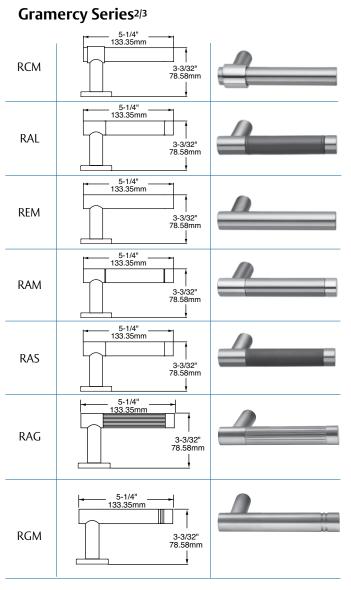


- ¹ Lever returns within 1/2" (13mm) of door face
- ² Not available with Simpli[™] roseless trim
- ³ Gramercy levers are customized; refer to page 8 for ordering information
- $^4\,\text{H}003\text{-H}006$ Contain white or black polycarbonate inserts. Not available with MicroShield® antimicrobial coating.

Wooster Square^{2/4}

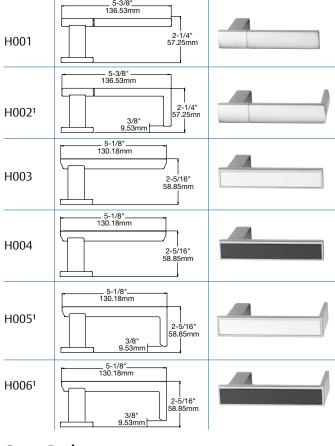

Grant Park²

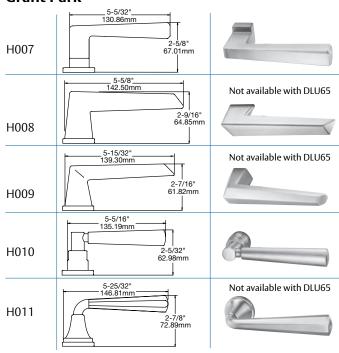



Ordering Gramercy Series Levers


DL Series Tubular Locks



Gramercy Series Levers (DL Series Only)







Gramercy Finish Codes

ANSI/BHMA Finish	SARGENT Finish	Gramercy Code*	Description	
630	32D	30	Satin Stainless Steel	
629	32	29	Bright Stainless Steel	
N/A	N/A	ВН	Maple (wood insert)	
N/A	N/A	ВК	Black (Santoprene™ or leather insert)	
N/A	N/A	BN	Brown (leather insert)	

^{*}Code used to specify Gramercy Series finishes only. Use available finishes list to specify desired finish when ordering.

Gramercy Lever Descriptions & Available Finishes

Lever Designation	Lever Description	Available Finishes (AS ORDERED)
RAG	Grooved Insert	2929 or 3030
RAL	Leather Insert	29BK29, 29BN29 or 30BK30, 30BN30
RAM	Metallic Insert	2930** only
RAS	Santoprene Insert	29BK29 or 30BK30
RCM	Raised Band	2929, 3030 or 2930**
REM	Plain	2929 or 3030
RGM	Two Grooves	2929 or 3030

^{**}Two-tone finish - grip of lever is 32D, balance of lever is 32. Rose/escutcheon and lock finish will be 32.

To order Gramercy Series levers with SARGENT products, see the examples below. When specifying finish, use the last two digits of the ANSI/BHMA standard finish code, i.e. use "29" for polished stainless, ANSI/BHMA finish 629.

How to Order DL Series Locks with Gramercy Levers

Options	Series	Function	Roses	Lever	Finish	
Select from page 4	DL	Select from page 4	Select from page 10	Leather insert	Bright stainless steel with brown leather	
28-	DL	U65	ТО	RAL	29BN29	

 $Gramercy\ Levers\ are\ available\ with\ E2,\ O,\ CO\ \&\ TO\ roses;\ DLU93\ \&\ DLU94\ functions\ are\ also\ available\ with\ E3,\ CR,\ LN\ \&\ TR\ roses\ .$

SARGENT

ASSA ABLOY

Coastal Series[™] & Standard Levers

DL Series Tubular Locks

Coastal Series™ (DL & RDL Series)



Standard Levers (DL Series Only)

A Handed	2-15/16" 51mm	J	5-1/4" 133mm 2-13/16" 71mm	
В	2-5/8" 127mm 127mm	L	2-3/8" 60mm	
E	4-1/2" 114mm ——————————————————————————————————	Р	5-1/2" 140mm 2-1/2" 67mm	
F	4-1/2" 114mm ——————————————————————————————————	W	4-1/2" 114mm →	


90102 06/18

Roses & Finishes


DL & RDL Series Tubular Locks

SARGENT ASSA ABLOY

DL Tubular Lock Roses




Additional Roses for DLU93 and DLU94 Functions Only



*CAUTION:

Cannot retrofit on existing cylindrical lock door preps with through-bolt holes outside the 2-1/8" bored hole.

Simpli™ Roseless Trim



Finishes for RDL & DL Series

SARGENT	Description	ANSI/BHMA
03	Bright brass, clear coated	605
04	Satin brass, clear coated	606
09	Bright bronze, clear coated	611
10	Satin bronze, clear coated	612
10B	Dark oxidized satin bronze, oil rubbed	613
10BE	Dark oxidized satin bronze, equivalent	(613E)
10BL	Oxidized satin bronze, clear coated	614
14	Bright nickel plated, clear coated	618
15*	Satin nickel plated, clear coated	619
20D	Statuary dark bronze, clear coated	624
26	Bright chrome plated	625
26D*	Satin chrome plated	626
32	Bright stainless steel	629
32D*	Satin stainless steel	630
BSP	Black Suede Powder Coat	_


Note: Gramercy Series levers only offered in 32 and 32D.

Refer to page 8 for ordering information.

* MicroShield $^{\odot}$ - optional designate SG- option (Available on 15, 26D, and 32D Finishes only)


ASSA ABLOY

2-3/4" Curved Lip Strike – Standard




- Furnished standard with 1-1/4" (32mm) curved lip from center of strike screw holes to end of lip
- Lip lengths 1" (25mm), 1-1/4" (32mm) standard,
 1-1/2" (38mm), 1-3/4" (44mm) and 2" (51mm)
- To order strike separately, specify 800 strike x finish x lip length

4-7/8" Curved Lip Strike: (28-Option)




- · Conforms to ANSI standard
- Furnished standard with curved lip 1-1/4"
 (32mm) from center of strike screw holes to
 end of lip
- Lip lengths: 1-1/4" (32mm), 1-3/8" (35mm)
 1-5/8" (42mm), 1-7/8" (48mm)
 2-1/8" (54mm), 2-3/8" (60mm)
 2-5/8" (66mm), 2-7/8" (73mm)
- To order strike separately, specify 808 strike x finish x lip length

2-1/4" Full Lip Strike (14- Option)




- Furnished standard with curved lip 1-1/4" (32mm) from center of strike screw holes to end of lip
- No other lip lengths available
- To order strike separately, specify: 505 strike x finish

2-1/4" (57 mm) Full Lip Strike (13- Option)



- Lockset x Front and Strike with 1/4" (32 mm) Radius and 2-3/8" (60 mm) Backset
- To order strike separately, specify: 505 x finish
- Adjustable tab to reduce door movement when latch engaged in strike standard

ANSI Wrought Strike Box



- Used with ANSI 4-7/8" (124 mm) strike (#808)
- To order with lock, specify option WBS
- To order separately, specify 77-1141


06/18

90102

Architectural Specifications

DL Series Tubular Locks



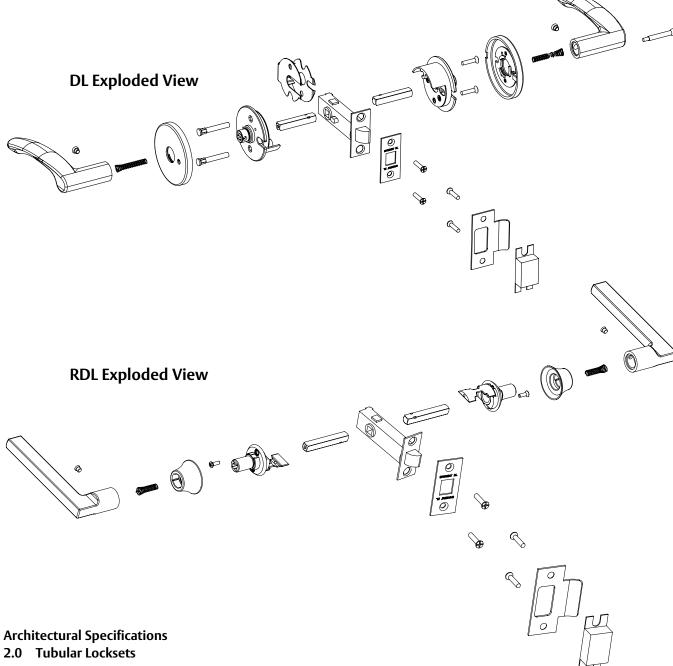

- A. Locksets shall be either standard tubular (DL Series) or roseless tubular (RDL Series) as manufactured by SARGENT Manufacturing Company, New Haven, CT.
- B. Locks shall be non-handed with bi-directional lever operation.
- C. The DL Series locks mount in a standard ANSI 161 door preparation (2-1/8 inch dia.) without additional through-bolt preps. RDL Series require special custom door preparation.
- D. Lockset levers shall be made of solid material with no plastic fillers.
- E. Locks shall have a 2-3/4" (70mm) backset standard, with 2-3/8" (60mm) offered as an option.
- F. Strikes shall be non-handed with a curved lip.
- G. Locks shall have a one year limited warranty.

SARGENT ASSA ABLOY



SARGENT Manufacturing Company 100 Sargent Drive New Haven, CT 06511 USA 800-727-5477 www.sargentlock.com ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience